
**Information technology —
Telecommunications and information
exchange between systems — Private
Integrated Services Network —
Inter-exchange signalling protocol — Call
Completion supplementary services**

*Technologies de l'information — Télécommunications et échange
d'information entre systèmes — Réseau privé à intégration de
services — Protocole de signalisation d'interéchange — Services
supplémentaires de complément d'appel*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13870:2003

© ISO/IEC 2003

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Foreword	v
Introduction	vi
1 Scope	1
2 Conformance	1
3 Normative references	1
4 Definitions	2
4.1 External definitions	2
4.2 Other definitions	2
4.2.1 CC Call	2
4.2.2 CC Request	2
4.2.3 Connection release	2
4.2.4 Connection retention	3
4.2.5 Path reservation	3
4.2.6 Service retention	3
5 Acronyms	3
6 Signalling protocol for the support of SS-CCBS and SS-CCNR	3
6.1 SS-CCBS/CCNR description	3
6.2 SS-CC operational requirements	3
6.2.1 Requirements on the Originating PINX	3
6.2.2 Requirements on the Terminating PINX	4
6.2.3 Requirements on a Transit PINX	4
6.3 SS-CC coding requirements	5
6.3.1 Operations	5
6.3.2 Information elements	9
6.3.3 Messages	9
6.4 SS-CC State definitions	9
6.4.1 States at the Originating PINX	9
6.4.2 States at the Terminating PINX	10
6.5 SS-CC signalling procedures	10
6.5.1 Major options	10
6.5.2 Actions at the Originating PINX	11
6.5.3 Actions at the Terminating PINX	16
6.5.4 Actions at the Transit PINX	19
6.6 Impact of interworking with public ISDNs	19
6.6.1 Incoming Gateway PINX procedures: SS-CCBS request from a public ISDN	20
6.6.2 Outgoing Gateway PINX procedures: SS-CCBS request to a public ISDN	20
6.7 Impact of interworking with non-ISDNs	21
6.7.1 Incoming Gateway PINX procedures	21
6.7.2 Outgoing Gateway PINX procedures	21
6.8 Protocol interaction between SS-CCBS and Other Supplementary Services and ANFs	21

6.8.1	Calling Name Identification Presentation (SS-CNIP)	21
6.8.2	Connected Name Identification Presentation (SS-CONP)	21
6.8.3	Completion of Calls on No Reply (SS-CCNR)	22
6.8.4	Call Transfer	22
6.8.5	Call Forwarding Unconditional (SS-CFU)	22
6.8.6	Call Forwarding Busy (SS-CFB)	22
6.8.7	Call Forwarding No Reply (SS-CFNR)	22
6.8.8	Call Deflection (SS-CD)	22
6.8.9	Path Replacement (ANF-PR)	22
6.9	Protocol interaction between SS-CCNR and other supplementary Services and ANFs	22
6.9.1	Calling Name Identification Presentation (SS-CNIP)	23
6.9.2	Connected Name Identification Presentation (SS-CONP)	23
6.9.3	Completion of Calls to Busy Subscribers (SS-CCBS)	23
6.9.4	Call Transfer	23
6.9.5	Call Forwarding Unconditional (SS-CFU)	23
6.9.6	Call Forwarding Busy (SS-CFB)	23
6.9.7	Call Forwarding No Reply (SS-CFNR)	23
6.9.8	Call Deflection (SS-CD)	24
6.9.9	Path Replacement (ANF-PR)	24
6.10	Parameter values (timers)	24
6.10.1	Timers at the Originating PINX	24
6.10.2	Timers at the Terminating PINX	24
Annexes		
A	Protocol Implementation Conformance Statement (PICS) proforma	25
B	Imported ASN.1 definitions	36
C	Examples of messages sequences	37
D	Specification and Description Language (SDL) Representation of Procedures	46
E	Bibliography	64
F	ASN.1 definitions according to ITU-T Recs. X.208 / X.209	65

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 13870 was prepared by ECMA (as ECMA-186) and was adopted, under a special “fast-track procedure”, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

This third edition cancels and replaces the second edition (ISO/IEC 13870:2001), which has been technically revised.

Introduction

This International Standard is one of a series of Standards defining services and signalling protocols applicable to Private Integrated Services Networks (PISNs). The series uses ISDN concepts as developed by ITU-T and conforms to the framework of International Standards for Open Systems Interconnection as defined by ISO/IEC.

This International Standard specifies the signalling protocol for use at the Q reference point in support of the Call Completion supplementary services:

- Call Completion to Busy Subscriber (SS-CCBS)
- Call Completion on No Reply (SS-CCNR).

The protocol defined in this International Standard forms part of the PSS1 protocol (informally known as QSIG).

This International Standard is based upon the practical experience of ECMA member companies and the results of their active and continuous participation in the work of ISO/IEC JTC 1, ITU-T, ETSI and other international and national standardization bodies. It represents a pragmatic and widely based consensus.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13870:2003

Information technology — Telecommunications and information exchange between systems — Private Integrated Services Network — Inter-exchange signalling protocol — Call Completion supplementary services

1 Scope

This International Standard specifies the signalling protocol for the support of the Call Completion supplementary services at the Q reference point between Private Integrated services Network eXchanges (PINXs) connected together within a Private Integrated Services Network (PISN). The Call Completion supplementary services are Completion of Calls to Busy Subscribers (SS-CCBS) and Completion of Calls on No Reply (SS-CCNR).

SS-CCBS enables a calling User A, encountering a busy destination User B, to have the call completed when User B becomes not busy, without having to make a new call attempt.

SS-CCNR enables a calling User A, encountering a destination User B that, though alerted, does not answer, to have the call completed when User B becomes not busy again after a period of activity, without having to make a new call attempt.

The Q reference point is defined in ISO/IEC 11579-1.

Service specifications are produced in three stages and according to the method specified in ETS 300 387. This International Standard contains the stage 3 specification for the Q reference point and satisfies the requirements identified by the stage 1 and stage 2 specifications in ISO/IEC 13866.

The signalling protocols for SS-CCBS and SS-CCNR operate on top of the signalling protocol for basic circuit switched call control, as specified in ISO/IEC 11572, and uses certain aspects of the generic procedures for the control of supplementary services specified in ISO/IEC 11582.

This International Standard also specifies additional signalling protocol requirements for the support of interactions at the Q reference point between SS-CC and other supplementary services and ANFs.

This International Standard is applicable to PINXs which can interconnect to form a PISN.

2 Conformance

In order to conform to this International Standard, a PINX shall satisfy the requirements identified in the Protocol Implementation Conformance Statement (PICS) proforma in annex A.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11571:1998, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Networks - Addressing*

ISO/IEC 11572:2000, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Circuit mode bearer services - Inter-exchange signalling procedures and protocol*

ISO/IEC 11574:2000, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Circuit-mode 64 kbit/s bearer services - Service description, functional capabilities and information flows*

ISO/IEC 11579-1:1994, *Information technology - Telecommunications and information exchange between systems - Private integrated services network - Part 1: Reference configuration for PISN Exchanges (PINX)*

ISO/IEC 11582:2002, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Generic functional protocol for the support of supplementary services - Inter-exchange signalling procedures and protocol*

ISO/IEC 13866:1995, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Specification, functional model and information flows - Call completion supplementary services*

ISO/IEC 13873:2003, *Information technology - Telecommunications and information exchange between systems - Private Integrated Services Network - Inter-exchange signalling protocol - Call Diversion supplementary services*

ETS 300 387:1994, *Private Telecommunication Network (PTN); Method for the specification of basic and supplementary services*

ITU-T Rec. I.112:1993, *Vocabulary of terms for ISDNs*

ITU-T Rec. I.210:1993, *Principles of telecommunication services supported by an ISDN and the means to describe them*

ITU-T Rec. Q.950:2000, *Supplementary services protocols, structure and general principles*

ITU-T Rec. Z.100:2002, *Specification and description language (SDL)*

4 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

4.1 External definitions

This International Standard uses the following terms defined in other documents:

- | | |
|---|--------------------|
| – Application Protocol Data Unit (APDU) | (ISO/IEC 11582) |
| – Basic Service | (ITU-T Rec. I.210) |
| – Complete Number | (ISO/IEC 11571) |
| – Incoming Gateway PINX | (ISO/IEC 11572) |
| – Interpretation APDU | (ISO/IEC 11582) |
| – Network Facility Extension (NFE) | (ISO/IEC 11582) |
| – Originating PINX | (ISO/IEC 11582) |
| – Outgoing Gateway PINX | (ISO/IEC 11572) |
| – Private Integrated Services Network (PISN) | (ISO/IEC 11579-1) |
| – Private Integrated services Network eXchange (PINX) | (ISO/IEC 11579-1) |
| – Signalling | (ITU-T Rec. I.112) |
| – Supplementary Service | (ITU-T Rec. I.210) |
| – Supplementary Service Control Entity | (ISO/IEC 11582) |
| – Terminating PINX | (ISO/IEC 11582) |
| – Transit PINX | (ISO/IEC 11582) |
| – User | (ISO/IEC 11574) |

4.2 Other definitions

4.2.1 CC Call

The re-initiation, in the course of executing a CC Request, of the previously unsuccessful call from User A to User B on behalf of User A, with or without Path Reservation.

4.2.2 CC Request

An instance of SS-CCBS or SS-CCNR.

4.2.3 Connection release

The release of the call independent signalling connection as soon as a SS-CC has been initiated and the establishment of further call independent signalling connections for subsequent phases of the service.

4.2.4 Connection retention

The use of a single call independent signalling connection throughout the lifetime of a particular instance of SS-CC.

4.2.5 Path reservation

The reservation of resources prior to the SS-CC Recall, by means of a basic call set up from the Originating to the Terminating PINX, in order to have a bearer connection through the PISN available when User A accepts the SS-CC Recall.

4.2.6 Service retention

The optional capability to continue with a CC Request after the CC Call failed due to User B being busy again.

5 Acronyms

APDU	Application Protocol Data Unit
ASN.1	Abstract Syntax Notation no. 1
CC	Call Completion
ISDN	Integrated Services Digital Network
MSI	Manufacturer Specific Information
NFE	Network Facility Extension
PICS	Protocol Implementation Conformance Statement
PINX	Private Integrated services Network eXchange
PISN	Private Integrated Services Network
SDL	Specification and Description Language
SS-CC	Supplementary Service Completion of Calls (i.e. SS-CCBS or SS-CCNR)
SS-CCBS	Supplementary Service Completion of Calls to Busy Subscribers
SS-CCNR	Supplementary Service Completion of Calls on No Reply
TE	Terminal Equipment

6 Signalling protocol for the support of SS-CCBS and SS-CCNR

6.1 SS-CCBS/CCNR description

Completion of Calls to Busy Subscribers (SS-CCBS) is a supplementary service which allows a calling User A, on encountering a busy called User B, to request that the PISN monitors User B and indicates to User A when User B becomes not busy. On response by User A to that indication the PISN will attempt to complete the call to User B.

Completion of Calls on No Reply (SS-CCNR) is a supplementary service which allows a calling User A, when the called User B does not respond to the call request, to request that the PISN monitors User B and indicates to User A when User B becomes not busy after a subsequent period of activity at User B's TE. On response by User A to that indication the PISN will attempt to complete the call to User B.

NOTE - Which activities at User B's TE would result in a 'B not busy' indication to User A is outside the scope of this International Standard.

These supplementary services are applicable to all basic services defined in ISO/IEC 11574.

6.2 SS-CC operational requirements

6.2.1 Requirements on the Originating PINX

Call establishment procedures for the outgoing side of an inter-PINX link and call release procedures, as specified in ISO/IEC 11572, shall apply.

Generic procedures for the call related control of supplementary services, as specified in ISO/IEC 11582 for an End PINX, shall apply. Additionally generic procedures for the call independent control (connection oriented) of supplementary services, as specified in ISO/IEC 11582 for an Originating and a Terminating PINX, shall apply.

6.2.2 Requirements on the Terminating PINX

Call establishment procedures for the incoming side of an inter-PINX link and call release procedures, as specified in ISO/IEC 11572, shall apply.

Generic procedures for the call related control of supplementary services, as specified in ISO/IEC 11582 for an End PINX, shall apply. Additionally generic procedures for the call independent control (connection oriented) of supplementary services, as specified in ISO/IEC 11582 for an Originating and a Terminating PINX, shall apply.

6.2.3 Requirements on a Transit PINX

Basic call procedures for call establishment and call clearing at a Transit PINX, as specified in ISO/IEC 11572, shall apply.

NOTE - The use of basic call timer T310 at a Transit PINX can cause premature clearing of a reserved path if the timer value is too short. For this reason this International Standard specifies the sending of CCITT progress description no. 8 "in-band information or appropriate pattern now available" by the Terminating PINX, in order to stop timer T310, even though in-band tones and announcements are not applicable in this situation.

Generic procedures for the call related control and call independent control (connection oriented) of supplementary services, as specified in ISO/IEC 11582 for a Transit PINX, shall apply.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13870:2003

6.3 SS-CC coding requirements

6.3.1 Operations

The operations defined in Abstract Syntax Notation number 1 (ASN.1) in table 1 shall apply. The notation is in accordance with ITU-T Rec. X.680 and X.690. The ITU-T Rec. X.208 and X.209 superseded version is in annex F.

Table 1 - Operations in support of SS-CC

SS-CC-Operations-asn1-97 { iso (1) standard (0) pss1-call-completion (13870) operations-asn1-97 (1)}	
DEFINITIONS EXPLICIT TAGS ::=	
BEGIN	
IMPORTS	
OPERATION,	
ERROR	
FROM Remote-Operations-Information-Objects	
{ joint-iso-itu-t remote-operations (4) informationObjects(5) version1 (0)}	
EXTENSION, Extension{}	
FROM Manufacturer-specific-service-extension-class-asn1-97	
{ iso(1) standard(0) pss1-generic-procedures(11582) msi-class-asn1-97(11) }	
PSS1InformationElement	
FROM PSS1-generic-parameters-asn1-97	
{ iso standard pss1-generic-procedures (11582) pss1-generic-parameters-asn1-97(17)}	
PartyNumber,	
PartySubaddress,	
PresentedNumberUnscreened	
FROM Addressing-Data-Elements-asn1-97	
{iso standard pss1-generic-procedures (11582) addressing-data-elements-asn1-97 (20)}	
supplementaryServiceInteractionNotAllowed	
FROM General-Error-List	
{ ccitt (0) recommendation (0) q 950 general-error-list (1) } ;	
CC-Operations OPERATION ::= {ccbsRequest ccnrRequest ccCancel ccExecPossible ccPathReserve	
ccRingout ccSuspend ccResume }	
ccbsRequest OPERATION ::= {	
ARGUMENT	CcRequestArg
RESULT	CcRequestRes
ERRORS{	
shortTermRejection	
longTermRejection	
unspecified	
supplementaryServiceInteractionNotAllowed	
}	
CODE	local: 40
}	

Table 1 - Operations in support of SS-CC (continued)

```

ccnrRequest OPERATION ::= {
    ARGUMENT      CcRequestArg
    RESULT        CcRequestRes
    ERRORS{
        shortTermRejection |
        longTermRejection |
        unspecified |
        supplementaryServiceInteractionNotAllowed
    }
    CODE          local: 27
}

ccCancel OPERATION ::= {
    ARGUMENT      CcOptionalArg
    RETURN RESULT FALSE
    ALWAYS RESPONDS FALSE
    CODE          local: 28
}

ccExecPossible OPERATION ::= {
    ARGUMENT      CcOptionalArg
    RETURN RESULT FALSE
    ALWAYS RESPONDS FALSE
    CODE          local: 29
}

ccPathReserve OPERATION ::= {
    ARGUMENT      CcExtension
    RESULT        CcExtension
    ERRORS {
        remoteUserBusyAgain |
        failureToMatch |
        failedDueToInterworking |
        unspecified
    }
    CODE          local: 30
}

```

Table 1 - Operations in support of SS-CC (continued)

```

ccRingout OPERATION ::= {
    ARGUMENT          CcExtension
    RETURN RESULT     FALSE
    ERRORS{
        remoteUserBusyAgain |
        failureToMatch |
        unspecified
    }
    ALWAYS RESPONDS   FALSE
    CODE              local: 31
}

```

```

ccSuspend OPERATION ::= {
    ARGUMENT          CcExtension
    RETURN RESULT     FALSE
    ALWAYS RESPONDS   FALSE
    CODE              local: 32
}

```

```

ccResume OPERATION ::= {
    ARGUMENT          CcExtension
    RETURN RESULT     FALSE
    ALWAYS RESPONDS   FALSE
    CODE              local: 33
}

```

-- TYPE DEFINITIONS FOR CC DATA TYPES FOLLOW

```

CcRequestArg ::= SEQUENCE {
    numberA          PresentedNumberUnscreened,
    numberB          PartyNumber,
    service          PSS1InformationElement,
    -- permitted information elements are:
    -- Bearer capability; Low layer compatibility; High layer compatibility
    subaddrA         [10] PartySubaddress OPTIONAL,
    subaddrB         [11] PartySubaddress OPTIONAL,
    can-retain-service [12] IMPLICIT BOOLEAN DEFAULT FALSE,
    retain-sig-connection [13] IMPLICIT BOOLEAN OPTIONAL,
    -- TRUE: signalling connection to be retained;
    -- FALSE: signalling connection to be released;
    -- omission: release or retain signalling connection--
    extension        CcExtension OPTIONAL
}

```

Table 1 - Operations in support of SS-CC (concluded)

```

CcRequestRes ::= SEQUENCE{
    no-path-reservation    [0] IMPLICIT BOOLEAN DEFAULT FALSE,
    retain-service         [1] IMPLICIT BOOLEAN DEFAULT FALSE,
    extension              CcExtension OPTIONAL
}

CcOptionalArg ::= CHOICE{
    fullArg                [0] IMPLICIT SEQUENCE {
        numberA            PartyNumber,
        numberB            PartyNumber,
        service            PSS1InformationElement,
        -- permitted information elements are:
        -- Bearer capability;
        -- Low layer compatibility;
        -- High layer compatibility.
        subaddrA           [10] PartySubaddress OPTIONAL,
        subaddrB           [11] PartySubaddress OPTIONAL,
        extension          CcExtension OPTIONAL
    },
    extArg                CcExtension
}

CcExtension ::= CHOICE {
    none                NULL,
    single              [14] IMPLICIT Extension{{CCExtSet}},
    multiple            [15] IMPLICIT SEQUENCE OF Extension{{CCExtSet}}
}

CCExtSet          EXTENSION ::= {...}

-- DEFINITIONS FOR ERRORS FOLLOW

unspecified ERROR ::= {
    PARAMETER CODE      Extension{{CCExtSet}}
                        local: 1008
}

shortTermRejection  ERROR ::= { CODE      local: 1010}
longTermRejection   ERROR ::= { CODE      local: 1011}
remoteUserBusyAgain ERROR ::= { CODE      local: 1012}
failureToMatch       ERROR ::= { CODE      local: 1013}
failedDueToInterworking ERROR ::= { CODE    local: 1014}

END -- of SS-CC-Operations-asn1-97

```

6.3.2 Information elements

6.3.2.1 Facility information element

The operations defined in 6.3.1 shall be coded in the Facility information element in accordance with 11.3.3 of ISO/IEC 11582.

The Facility information element shall always contain an NFE. When the Facility information element is sent and conveys an invoke APDU the destinationEntity element of the NFE shall contain value endPINX.

A Facility information element conveying a ccPathReserve invoke APDU shall also contain an Interpretation APDU with value clearCallIfAnyInvokePduNotRecognised. In all other cases the Interpretation APDU shall either be omitted or included with value rejectAnyUnrecognisedInvokePdu.

Within elements of type PSS1InformationElement information elements (e.g. Bearer capability) shall be coded in accordance with ISO/IEC 11572.

6.3.2.2 Other information elements

Any other information elements (e.g. Calling party number, Called party number) shall be coded in accordance with the rules of ISO/IEC 11572 and ISO/IEC 11582.

6.3.3 Messages

The Facility information element shall be conveyed in the messages as specified in clause 10 of ISO/IEC 11582.

6.4 SS-CC State definitions

6.4.1 States at the Originating PINX

The procedures for the Originating PINX are written in terms of the following conceptual states existing within the SS-CC Supplementary Service Control entity in that PINX in association with a particular CC Request.

6.4.1.1 CC-Idle

This state exists if SS-CC is not active.

6.4.1.2 CC-Invoked-User-A-RET

This state exists for an active CC Request while waiting for the indication that User B is not busy, using the connection retention method.

6.4.1.3 CC-Invoked-User-A-RLS

This state exists for an active CC Request while waiting for the indication that User B is not busy, using the connection release method.

6.4.1.4 CC-Path-Setup

This state exists during Path Reservation.

6.4.1.5 CC-Ringout

This state exists when User A has accepted the SS-CC Recall but completion of the call to User B is still pending.

6.4.1.6 CC-Suspended-User-A

This state exists when a CC Call without Path Reservation has been postponed because User A is busy.

6.4.1.7 CC-Wait-ACK

This state exists during SS-CC invocation.

6.4.1.8 CC-Wait-User-A-Answer-N

This state exists while waiting for SS-CC Recall acceptance from User A if no path has been reserved.

6.4.1.9 CC-Wait-User-A-Answer-R

This state exists while waiting for SS-CC Recall acceptance from User A after a path has been reserved.

6.4.1.10 CC-Wait-User-A-Free

This state exists when Path Reservation is delayed because User A is busy.

6.4.2 States at the Terminating PINX

The procedures for the Terminating PINX are written in terms of the following conceptual states existing within the SS-CC Supplementary Service Control entity in that PINX in association with a particular CC Request.

6.4.2.1 CC-Idle

This state exists if SS-CC is not active.

6.4.2.2 CC-Await-Call-Completion

This state exists while waiting for the incoming CC Call after having indicated that User B is not busy.

6.4.2.3 CC-Invoked-User-B

This state exists while User B is monitored as a result of a CC Request received.

6.4.2.4 CC-Path-Complete

This state exists when a path has been successfully reserved and CC Call completion is pending.

6.4.2.5 CC-Suspended-User-B

This state exists when a CC Call has been postponed because User A is busy.

6.4.2.6 CC-Wait-User-B-Alert

This state exists after a CC Call has been extended to User B, while waiting for acceptance (alerting or connect).

6.5 SS-CC signalling procedures

The following procedures are a combination of call related and call independent signalling. The latter uses the connection-oriented APDU transport mechanism specified in ISO/IEC 14582, which provides call independent signalling connections for supplementary service control.

All SS-CC control information is exchanged between Originating PINX and Terminating PINX.

Examples of message sequences are shown in annex C.

6.5.1 Major options

The signalling protocol contains the following major options. These are negotiated between the Originating and Terminating PINXs at SS-CC invocation time, using specific elements in the argument and result of operations ccbsRequest and ccnrRequest.

6.5.1.1 Path Reservation

There are two methods of establishing the CC Call:

path reservation method - a bearer connection between the Originating and Terminating PINXs is established before recalling User A, to avoid the possibility of encountering network congestion after User A responds to SS-CC Recall;

non-reservation method - a bearer connection between the Originating and Terminating PINXs is established after User A responds to SS-CC Recall and the service is cancelled if network congestion is encountered.

As described in 6.5.2, it is an option of the Originating PINX which of these methods is used. The procedures specified in 6.5.3 mandate from a Terminating PINX the support of non-reservation method and allows the path reservation method. In interworking situations, an Outgoing Gateway PINX can force the use of the non-reservation method if the other network cannot support path reservation; see 6.6 and 6.7.

6.5.1.2 Retention of signalling connection

There are two ways in which SS-CC uses call independent signalling connections:

connection retention method - the signalling connection is maintained until completion or cancellation of SS-CC;

connection release method - the signalling connection is cleared after each phase of call independent signalling and a new signalling connection is established for each subsequent phase of call independent signalling.

The procedures specified in 6.5.2 and 6.5.3 leave the decision on the method to the Terminating PINX, but permit the Originating PINX to ask for the use of the connection release method if possible, in order to avoid occupying network resources for the duration of the service. Similarly, 6.7 permits an Incoming Gateway PINX to ask for the use of the connection release

method for compatibility with other networks. Clauses 6.6 and 6.7 provide a means by which an Incoming Gateway PINX or Outgoing Gateway PINX can force the use of the connection retention method for compatibility with public ISDNs and other networks that operate with a retained connection.

6.5.1.3 Service retention

There are two possible behaviours when User B is found to be busy again after User A responds to SS-CC Recall.

service retention method - the CC Request remains in force at the Originating and Terminating PINXs and the Terminating PINX commences the monitoring of User B again;

service cancellation method - the CC Request is cancelled at the Originating and Terminating PINXs.

Either PINX can force the use of the service cancellation method. The service retention method will be used if both PINXs agree.

6.5.2 Actions at the Originating PINX

The SDL representation of procedures at the Originating PINX is shown in D.1 to D.10 of annex D.

6.5.2.1 Normal procedures

6.5.2.1.1 CCBS invocation

If User A requests SS-CCBS and the request is acceptable to the Originating PINX, the Originating PINX shall send a ccbsRequest invoke APDU to the Terminating PINX according to 6.5.2.1.3.

NOTE - SS-CCBS can be requested after a call attempt has encountered a busy condition at User B. The release of the original call is beyond the scope of this International Standard.

Upon receipt of a ccbsRequest return result APDU the Originating PINX shall start the service duration timer T2 with a value appropriate for SS-CCBS, enter state CC-Invoked-User-A-RET (connection retention case) or CC-Invoked-User-A-RLS (connection release case), and wait for an indication that User B has become not busy.

6.5.2.1.2 CCNR invocation

If User A requests SS-CCNR and the request is acceptable to the Originating PINX, the Originating PINX shall send a ccnrRequest invoke APDU to the Terminating PINX according to 6.5.2.1.3.

NOTE - SS-CCNR can be requested after a call to User B has remained unanswered. The release of the original call is beyond the scope of this International Standard.

Upon receipt of a ccnrRequest return result APDU the Originating PINX shall start the service duration timer T2 with a value appropriate for SS-CCNR, enter state CC-Invoked-User-A-RET (connection retention case) or CC-Invoked-User-A-RLS (connection release case), and wait for an indication that User B has become not busy after a subsequent period of activity.

6.5.2.1.3 SS-CC invocation - detailed procedure

The Facility information element containing the ccbsRequest or ccnrRequest invoke APDU shall be sent in a SETUP message which establishes a call independent signalling connection between the two end PINXs, according to 7.3 of ISO/IEC 11582. The SETUP message shall contain User B's number in information element Called party number, and optionally User A's number in information element Calling party number.

The following information shall be included in the argument of the ccbsRequest or ccnrRequest invoke APDU:

- basic call information from the original call:
 - the number of User A, or an indication that it is not available or restricted, in element numberA;
 - optionally and if available, the subaddress of User A, in element subaddrA;
 - the number of User B, in element numberB;
 - if available, the subaddress of User B, in element subaddrB;
 - the information elements Bearer capability, Low layer compatibility (if available) and High layer compatibility (if available), embedded in element service;

- optionally element retain-sig-connection with value TRUE if the Originating PINX prefers the connection retention option, or value FALSE if the Originating PINX prefers the connection release option. Otherwise, the element shall be omitted.
- optionally element can-retain-service with value TRUE if the Originating PINX is able to use the service retention method. Otherwise the element shall either be omitted or have the value FALSE.

After sending the ccbsRequest/ccnrRequest invoke APDU the Originating PINX shall start timer T1 and enter state CC-Wait-Ack.

Upon receipt of a ccbsRequest or ccnrRequest return result APDU the Originating PINX shall stop timer T1. If the result contains element retain-service with value TRUE and element can-retain-service was sent with value TRUE in the argument of the corresponding invoke APDU, the Originating PINX shall record the fact that the service retention method is to be used; otherwise it shall record the fact that the service cancellation method is to be used. If the result contains element no-path-reservation with value TRUE the Originating PINX shall record the fact that the non-reservation method is to be used. Otherwise it may select either the path reservation method or the non-reservation method.

NOTE - A Terminating PINX can force the use of the non-reservation method; see 6.5.3.1.3.

In interworking situations, an Outgoing Gateway PINX can force the use of the non-reservation method if the other network cannot support path reservation; see 6.6 and 6.7.

If the ccbsRequest/ccnrRequest return result APDU was received in a CONNECT message the Originating PINX shall continue according to the procedures specified for the connection retention method. If the return result APDU was received in a RELEASE message the Originating PINX shall complete the clearing of the signalling connection in accordance with 7.3 of ISO/IEC 11582 and continue according to the procedures specified for the connection release method.

6.5.2.1.4 Indication that User B is not busy

a) Connection retention case:

If a ccExecPossible invoke APDU is received in a FACILITY message (i.e. on the retained call independent signalling connection) while in state CC-Invoked-User-A-RET the Originating PINX shall proceed as described under c) below. Any basic call information, if present in the argument of the ccExecPossible invoke APDU, shall be ignored.

b) Connection release case:

On receipt of a ccExecPossible invoke APDU in a SETUP message for a call independent signalling connection the Originating PINX shall process the SETUP message according to 7.3 of ISO/IEC 11582, attempt to associate the APDU with a CC Request that is in state CC-Invoked-User-A-RLS, and if successful proceed as described under c) below.

The association shall be achieved by comparing all the basic call information received in the argument of the ccExecPossible invoke APDU with the information stored at the Originating PINX. If less information is received than what is stored, a match shall be deemed to occur if all the elements received match those stored and any missing element belongs to the following group: subaddress of User A; subaddress of User B; High layer compatibility information element; Low layer compatibility information element.

NOTE 1 - Information can be missing as a result of the Terminating PINX discarding part of the optional information at SS-CC invocation time. This need not cause ambiguity provided the Terminating PINX rejects CC Requests which are duplicates with regard to the remaining information.

NOTE 2 - The Originating PINX with regard to SS-CC is the Terminating PINX with regard to the call independent signalling connection.

c) For both cases:

In both cases a) and b) above the Originating PINX shall proceed in accordance with:

6.5.2.1.5, if User A is not busy and the non-reservation method is to be used; or

6.5.2.1.6, if User A is not busy and the path reservation method is to be used; or

6.5.2.1.7, if User A is busy and the non-reservation method is to be used; or

6.5.2.1.8, if User A is busy and the path reservation method is to be used.

6.5.2.1.5 CC Call without Path Reservation

If User A is not busy and the Originating PINX uses the non-reservation method for establishing the CC Call, the Originating PINX shall indicate the SS-CC Recall to User A, start the recall timer T3 and enter state CC-Wait-User-A-Answer-N.

If the SS-CC Recall is accepted before timer T3 expires the Originating PINX shall initiate the CC Call in accordance with ISO/IEC 11572 by sending a SETUP message towards the Terminating PINX, stop timer T3 and enter state CC-Ringout. The SETUP message shall contain a Facility information element with a ccRingout invoke APDU.

If in state CC-Ringout an ALERTING or a CONNECT message is received the Originating PINX shall stop the service duration timer T2, delete the CC Request and return to state CC-Idle. If a call independent signalling connection for SS-CC still exists it may be released according to 7.3 of ISO/IEC 11582. The CC Call shall continue in accordance with ISO/IEC 11572.

6.5.2.1.6 CC Call with Path Reservation

If User A is not busy and the Originating PINX uses the path-reservation method for establishing the CC Call, the Originating PINX shall:

- if the connection release method is used, return a RELEASE message with cause value number 16 "normal call clearing" to release the signalling connection; optionally the RELEASE message may also be sent in the connection retention case, if the service retention option does not apply and no further call independent signalling is expected;
- initiate Path Reservation as a basic call request according to ISO/IEC 11572, sending a SETUP message towards the Terminating PINX; include in the SETUP message a ccPathReserve invoke APDU, as well as all the information stored from the original call;
- start timer T4; and
- enter state CC-Path-Setup.

Upon receipt of a ccPathReserve return result APDU in a call related PROGRESS message, while in state CC-Path-Setup the Originating PINX shall stop timer T4.

If User A is busy the Originating PINX shall, if the capability exists, indicate to User A that User B is not busy. Either immediately or if the busy condition persists the Originating PINX shall continue according to 6.5.2.1.9.

NOTE - The means of determining whether the busy condition persists is implementation dependent.

If User A is not busy the Originating PINX shall indicate the SS-CC Recall to User A, start the recall timer T3 and enter state CC-Wait-User-A-Answer-R.

If the SS-CC Recall is accepted before timer T3 expires the Originating PINX shall stop timer T3, send a call related FACILITY message with a ccRingout invoke APDU to the Terminating PINX and enter state CC-Ringout.

If in state CC-Ringout an ALERTING or CONNECT message is received, the Originating PINX shall stop the service duration timer T2, delete the CC Request and return to state CC-Idle. If a call independent signalling connection for SS-CC still exists it may be released according to 7.3 of ISO/IEC 11582. The CC Call shall continue in accordance with ISO/IEC 11572.

6.5.2.1.7 User A busy, non-reservation method

a) Suspend procedure:

If User A is busy and the Originating PINX chooses the non-reservation method, the Originating PINX shall:

- if the connection retention method is used, send a ccSuspend invoke APDU to the Terminating PINX in a FACILITY message on the existing call independent signalling connection.
- if the connection release method is used, send a ccSuspend invoke APDU to the Terminating PINX in a call independent signalling connection CONNECT message.
- start monitoring User A and enter state CC-Suspended-User-A.

NOTE - The second action above implies changing from connection release method to connection retention method.

b) Resume procedure:

If User A, for whom a CC Request in state CC-Suspended-User-A exists, becomes not busy the Originating PINX shall send a FACILITY message with a ccResume invoke APDU on the existing call independent signalling connection and enter state CC-Invoked-User-A-RET, waiting for another indication that User B is not busy.

6.5.2.1.8 User A busy before Path Reservation

If User A is busy and the Originating PINX uses the path reservation method, the Originating PINX shall release the call independent signalling connection according to 7.3 of ISO/IEC 11582, unless the connection retention method applies, start monitoring User A, and enter state CC-Wait-User-A-Free. Cause number 16 "normal call clearing" shall be used when releasing the signalling connection.

The Originating PINX may also send a ccSuspend invoke APDU to the Terminating PINX on the existing call independent signalling connection, either in the RELEASE message in case of connection release or in a FACILITY message in case of connection retention.

If User A, for whom a CC Request in state CC-Wait-User-A-Free exists, becomes not busy the Originating PINX shall initiate a CC Call with Path Reservation according to 6.5.2.1.6.

6.5.2.1.9 User A busy after Path Reservation

If User A is busy on completion of Path Reservation the Originating PINX shall release the reserved path by sending a DISCONNECT message to the Terminating PINX, start monitoring User A and enter state CC-Wait-User-A-Free. The DISCONNECT message shall contain a Facility information element with a ccSuspend invoke APDU.

If User A, for whom a CC Request in state CC-Wait-User-A-Free exists, becomes not busy the Originating PINX shall initiate a CC Call with Path Reservation according to 6.5.2.1.6.

6.5.2.1.10 CCBS/CCNR cancellation**a) Cancellation initiated by the Originating PINX:**

In order to cancel a CC Request, the Originating PINX shall send a ccCancel invoke APDU to the Terminating PINX, release any call independent signalling connection by sending a RELEASE message with cause number 16 "normal call clearing", release any CC Call by sending a DISCONNECT message with cause number 16 "normal call clearing", delete all data stored for that CC Request, stop any timer running, and return to state CC-Idle. Unless cancellation was initiated by user request or the Originating PINX automatically re-invokes SS-CC, User A shall, if the capability exists, be informed of failure of the service.

If a call independent signalling connection exists the ccCancel invoke APDU shall be sent with argument extArg in the RELEASE message that initiates clearing of the connection.

If no call independent signalling connection exists but a path has been reserved (i.e. after a ccPathReserve return result APDU was received) the ccCancel invoke APDU shall be sent with argument extArg in the DISCONNECT message that initiates clearing of the reserved path.

In all other cases the ccCancel invoke APDU shall be sent in a SETUP message establishing a new signalling connection according to 7.3 of ISO/IEC 11582. The invoke APDU shall include argument fullArg with the same basic call information as previously sent in the ccbsRequest or ccnrRequest invoke APDU, i.e.

- User A's number in element numberA;
- User B's number in element numberB;
- information elements Bearer capability and, if stored, High layer compatibility / Low layer compatibility in element service;
- User A's subaddress, if stored, in element subaddrA - otherwise this element shall be omitted;
- User B's subaddress, if stored, in element subaddrB - otherwise this element shall be omitted;

in order to identify the CC Request to be cancelled. When subsequently receiving a RELEASE message, the signalling connection shall be cleared in accordance with ISO/IEC 11582.

b) Cancellation initiated by the Terminating PINX:

On receipt of a ccCancel invoke APDU from the Terminating PINX in the RELEASE message for an existing call independent signalling connection the Originating PINX shall delete all data stored for the associated CC Request, stop any timer still running, clear the CC Call - if already initiated - in accordance with ISO/IEC 11572, inform User A of the cancellation, if the capability exists, and return to state CC-Idle. Any basic call information, if present in the argument of the ccCancel invoke APDU, shall be ignored.

On receipt of a ccCancel invoke APDU in the SETUP message for a new call independent signalling connection the Originating PINX shall attempt to associate the APDU with an active CC Request, by comparing the basic call information received in the argument of the invoke APDU with the information locally stored. If the information received is less than what is stored a match shall be deemed to occur if all the elements received match those stored and any missing element belongs to the following group: subaddress of User A; subaddress of User B; High layer compatibility information element; Low layer compatibility information element. If successfully associated, the Originating PINX shall delete all data stored for that CC Request, stop any timer still running, clear the CC Call - if already initiated - in accordance with ISO/IEC 11572, inform User A of the cancellation, if the capability exists, and return to state CC-Idle. The signalling connection shall be released according to 7.3 of ISO/IEC 11582.

6.5.2.2 Exceptional procedures

6.5.2.2.1 CCBS/CCNR invocation

If establishment of the call independent signalling connection fails, or if after sending a ccbsRequest or ccnrRequest invoke APDU no answer is received from the Terminating PINX before timer T1 expires, or if the answer is a return error APDU or a reject APDU, a failure indication shall be given to User A, and the Originating PINX shall return to state CC-Idle. The call independent signalling connection shall be released in accordance with ISO/IEC 11582, if it still exists. Timer T1 shall be stopped if still running.

If a ccbsRequest or ccnrRequest return result APDU is received in a RELEASE message although the connection retention method is required (i.e. element retain-sig-connection was sent with value TRUE in the corresponding invoke APDU) the Originating PINX shall cancel the CC Request according to 6.5.2.1.10.

If a ccbsRequest or ccnrRequest return result APDU is received in a CONNECT message although the connection release method is expected (i.e. element retain-sig-connection was sent with value FALSE in the corresponding invoke APDU) the Originating PINX shall either cancel the CC Request according to 6.5.2.1.10 or, if possible, proceed according to the rules specified for the connection retention method.

6.5.2.2.2 Unexpected APDUs

If the Originating PINX receives a SETUP message for a call independent signalling connection with a ccExecPossible invoke APDU for which no matching CC Request in state CC-Invoked-User-A-RLS exists the PINX shall release the signalling connection according to 7.3 of ISO/IEC 11582, and include a ccCancel invoke APDU in the RELEASE message.

A ccCancel invoke APDU for which no matching CC Request exists shall be ignored when received in a SETUP message for a call independent signalling connection, but the signalling connection shall be released according to 7.3 of ISO/IEC 11582.

6.5.2.2.3 Service duration timer expiry

If the service duration timer T2 expires while in state CC-Invoked-User-A-RET, CC-Invoked-User-A-RLS, CC-Suspended-User-A, or CC-Wait-User-A-Free, the Originating PINX shall cancel the CC Request, using the procedure described in 6.5.2.1.10. In any other state, the Originating PINX may defer action until reaching one of the states above or may cancel the SS-CC request immediately.

6.5.2.2.4 SS-CC Recall timer expiry

If User A does not accept the SS-CC Recall before the recall timer T3 expires the Originating PINX shall cancel the CC Request, using the procedure described in 6.5.2.1.10.

6.5.2.2.5 Failure of Path Reservation

If a DISCONNECT message with a reject APDU indicating 'unrecognisedOperation' or with a return error APDU indicating 'failedDueToInterworking' is received in response to a ccPathReserve invoke APDU the Originating PINX shall stop timer T4 and choose one of the following options:

- If the signalling connection has been retained, attempt a CC Call without Path Reservation according to 6.5.2.1.5.
- Retry Path Reservation on another route.
- Cancel the CC Request, using the procedure described in 6.5.2.1.10. The Originating PINX may then automatically re-invoke SS-CC, forcing the use of connection retention so that the non-reservation method can be used.

If a call clearing message (according to ISO/IEC 11572) with a return error APDU indicating 'remoteUserBusyAgain' is received in response to a ccPathReserve invoke APDU, the Originating PINX shall stop timer T4 and return to state CC-Invoked-User-A-RET (connection retention case) or CC-Invoked-User-A-RLS (connection release case).

If the error value in the ccPathReserve return error APDU is failureToMatch or unspecified, the Originating PINX shall delete the CC Request, stop any timer running, and return to state CC-Idle. If a call independent signalling connection still exists the Originating PINX may release it in accordance with 7.3 of ISO/IEC 11582.

If a Path Reservation attempt fails due to network congestion the Originating PINX may retry later to establish a path to the Terminating PINX or cancel the CC Request according to 6.5.2.1.10.

If timer T4 expires, or if a Path Reservation attempt fails for any reason other than network congestion, without a ccPathReserve return error APDU being received, the Originating PINX shall cancel the CC Request according to 6.5.2.1.10.

6.5.2.2.6 Failure of CC Call presentation

If a call clearing message (according to ISO/IEC 11572) with a ccRingout return error APDU is received with an error value remoteUserBusyAgain the Originating PINX shall:

- if the service retention option is effective for that CC Request, return to state CC-Invoked-User-A-RET (connection retention case) or CC-Invoked-User-A-RLS (connection release case);
- else, delete the CC Request, stop timer T2, and return to state CC-Idle. If a call independent signalling connection still exists the Originating PINX may release it in accordance with 7.3 of ISO/IEC 11582. The Originating PINX shall either indicate the failure to User A or automatically (re-)invoke SS-CCBS according to 6.5.2.1.1.4.

If the error indicated in the ccRingout return error APDU is 'failureToMatch' or 'unspecified' the Originating PINX shall delete the CC Request, stop timer T2, indicate the failure to User A, and return to state CC-Idle. If a call independent signalling connection still exists the Originating PINX may release it in accordance with 7.3 of ISO/IEC 11582.

If the CC Call fails without a ccRingout return error APDU being received the Originating PINX shall cancel the CC Request according to 6.5.2.1.10.

6.5.3 Actions at the Terminating PINX

The SDL representation of procedures at the Terminating PINX is shown in D.11 to D.16 of annex D.

6.5.3.1 Normal procedures

6.5.3.1.1 CCBS invocation

If a Facility information element with a ccbsRequest invoke APDU is received (in a SETUP message according to 7.3 of ISO/IEC 11582) the Terminating PINX shall process the request according to 6.5.3.1.3 and start monitoring User B for becoming not busy, if the CC Request is accepted.

NOTE - If User B is already not busy this will result in immediate initiation of the procedures of 6.5.3.1.4.

6.5.3.1.2 CCNR invocation

If a Facility information element with a ccnrRequest invoke APDU is received (in a SETUP message according to 7.3 of ISO/IEC 11582) the Terminating PINX shall process the request according to 6.5.3.1.3 and start monitoring User B for becoming not busy after a subsequent period of activity, if the CC Request is accepted.

6.5.3.1.3 SS-CC invocation - detailed procedure

If a CC Request can be accepted the Terminating PINX shall store the basic call information contained in the argument of the ccbsRequest/ccnrRequest invoke APDU. The PINX may discard any of the following elements, if present: subaddress of User A; subaddress of User B; High layer compatibility information element; Low layer compatibility information element.

NOTE - Discarding part of the supplied information can lead to non-identical requests being treated as duplicates, see 6.5.3.2.1.

As an acknowledgment a ccbsRequest/ccnrRequest return result APDU shall be returned to the Originating PINX. If element can-retain-service was present in the corresponding invoke APDU and had value TRUE and the Terminating PINX is able to use the service retention method an element retain-service with value TRUE shall be included in the result. In all other cases this element shall either be omitted or have the value FALSE. If the Terminating PINX does not support the procedures for receiving a Call Completion call with Path Reservation according to 6.5.3.1.6, it shall force the use of non-reservation method by including an element no-path-reservation with value TRUE in the result.

The Terminating PINX shall select either the connection retention or the connection release method in accordance with the following:

- If element retain-sig-connection was present in the ccbsRequest/ccnrRequest invoke APDU and had value FALSE, and if the number of User A is available, the Terminating PINX shall use the connection release method.

- If element retain-sig-connection was present in the ccbsRequest/ccnrRequest invoke APDU and had value TRUE, or if the number of User A is not available, the Terminating PINX shall use the connection retention method.
- In other cases the Terminating PINX is free to select either method.

If the connection retention method is to be used, the Terminating PINX shall send the ccbsRequest/ccnrRequest return result APDU in a CONNECT message on the call independent signalling connection.

If the connection release method is to be used, the Terminating PINX shall send the ccbsRequest/ccnrRequest return result APDU in a RELEASE message on the call independent signalling connection and complete the release of the signalling connection in accordance with 7.3 of ISO/IEC 11582. Cause number 16 "normal call clearing" shall be used in the RELEASE message.

In both cases the Terminating PINX shall enter state CC-Invoked-User-B.

6.5.3.1.4 Indication that User B is not busy

As soon as User B becomes not busy (in the case of SS-CCNR, after a period of activity subsequent to SS-CC invocation) the Terminating PINX shall send a ccExecPossible invoke APDU to the Originating PINX, using call independent signalling, enter state CC-Await-Call-Completion and wait for the incoming CC Call.

If the connection retention method is used the ccExecPossible invoke APDU with argument extArg shall be sent in a FACILITY message on the existing signalling connection.

If the connection release method is used the ccExecPossible invoke APDU with argument fullArg shall be sent in a SETUP message, establishing a new call independent signalling connection according to 7.3 of ISO/IEC 11582. The argument shall contain the basic call information stored by the Terminating PINX in relation to that CC Request:

- User A's number in element numberA;
- User B's number in element numberB;
- information elements Bearer capability and, if stored, High layer compatibility / Low layer compatibility in element service;
- User A's subaddress, if stored, in element subaddrA - otherwise this element shall be omitted;
- User B's subaddress, if stored, in element subaddrB - otherwise this element shall be omitted.

NOTE 1 - The terminating PINX should ensure that the sending of the ccExecPossible invoke APDU using a new call independent signalling connection does not occur so soon after the sending of the ccbsRequest or ccnrRequest return result APDU that it will arrive at the Originating PINX out of sequence.

If subsequently a RELEASE message is received the signalling connection shall be released in accordance with 7.3 of ISO/IEC 11582, and the Terminating PINX shall remain in state CC-Await-Call-Completion.

NOTE 2 - It is the responsibility of the Terminating PINX to guard against non-receipt of a CC Call and, in the case of Path Reservation, of a subsequent ccRingout invoke APDU.

6.5.3.1.5 CC Call without Path Reservation

If a basic call SETUP message according to ISO/IEC 11572 is received with a ccRingout invoke APDU the terminating PINX shall attempt to associate the incoming CC Call with a CC Request in state CC-Await-Call-Completion and, if successful and User B is still not busy, extend the CC Call to User B and enter state CC-Wait-User-B-Alert.

The association shall be achieved by comparing the basic call information locally stored with the information elements of the received SETUP message. A match shall be deemed to occur if all the elements stored locally match the corresponding information elements of the SETUP message; any information element in the SETUP message for which no corresponding element is stored shall be ignored during the comparison.

If in state CC-Wait-User-B-Alert an ALERTING or a CONNECT message is sent to the Originating PINX according to ISO/IEC 11572, the Terminating PINX shall delete the respective CC Request and enter state CC-Idle. The associated signalling connection shall be released according to 7.3 of ISO/IEC 11582. The CC Call shall continue in accordance with ISO/IEC 11572.

6.5.3.1.6 CC Call with Path Reservation

If a basic call SETUP message according to ISO/IEC 11572 is received with a ccPathReserve invoke APDU and the terminating PINX supports path reservation method, the terminating PINX shall attempt to associate the incoming CC Call (i.e. path reservation request) with a CC Request in state CC-Await-Call-Completion or CC-Suspended-User-B, by comparing the basic call information locally stored with the information elements of the received SETUP message. A match shall be deemed to occur if all the elements stored locally match the corresponding information elements of the SETUP message; any information element in the SETUP message for which no corresponding element is stored shall be ignored during the comparison.

If the match is successful and User B is still not busy the Terminating PINX shall return a ccPathReserve return result APDU and enter state CC-Path-Complete. The return result APDU shall be sent in a call related PROGRESS message with CCITT progress description no. 8. The CC Call shall not be extended to User B yet.

NOTE - The function of this progress description is to stop basic call timer T310.

Upon receipt of a ccRingout invoke APDU in a call related FACILITY message while in state CC-Path-Complete, and if User B is still not busy, the Terminating PINX shall enter state CC-Wait-User-B-Alert and extend the CC Call to User B.

If in state CC-Wait-User-B-Alert an ALERTING or a CONNECT message is sent to the Originating PINX according to ISO/IEC 11572 the Terminating PINX shall delete the respective CC Request and enter state CC-Idle. If a signalling connection still exists it shall be released according to 7.3 of ISO/IEC 11582. The CC Call shall continue in accordance with ISO/IEC 11572.

6.5.3.1.7 CCBS/CCNR suspension / resumption

If a ccSuspend invoke APDU is received in a call independent FACILITY, RELEASE or CONNECT message according to 7.3 of ISO/IEC 11582. while in state CC-Await-Call-Completion the Terminating PINX shall enter state CC-Suspended-User-B.

If a ccSuspend invoke APDU is received in a call related DISCONNECT message while in state CC-Path-Complete the Terminating PINX shall release the reserved path in accordance with ISO/IEC 11572 and enter state CC-Await-Call-Completion, waiting for another path reservation attempt.

If a ccResume invoke APDU is received in a FACILITY message on the existing call independent signalling connection while in state CC-Suspended-User-B the Terminating PINX shall enter state CC-Invoked-User-B and resume monitoring of User B.

NOTE - If User B is already not busy this will result in immediate initiation of the procedures of 6.5.3.1.4.

If a ccPathReserve invoke APDU is received in a SETUP message while in state CC-Suspended-User-B, 6.5.3.1.6 shall apply.

6.5.3.1.8 CCBS/CCNR cancellation

a) Cancellation initiated by the Originating PINX:

If a ccCancel invoke APDU is received in a call independent RELEASE message (connection retention case) the Terminating PINX shall delete the information stored for the associated CC Request and enter state CC-Idle. Any basic call information, if present in the argument of the ccCancel invoke APDU, shall be ignored. The signalling connection shall be released in accordance with 7.3 of ISO/IEC 11582.

If a ccCancel invoke APDU is received in a call independent SETUP message (connection release case) the Terminating PINX shall attempt to associate the APDU with an active CC Request, by comparing the information contained in the argument of the ccCancel invoke APDU with the information locally stored. A match shall be deemed to occur if all the stored elements match the corresponding elements received; any received element for which no corresponding element is stored shall be ignored during the comparison. If successfully associated, the Terminating PINX shall delete the information stored for that CC Request, return a RELEASE message for the call independent signalling connection with Cause number 16 "normal call clearing", and enter state CC-Idle.

If a ccCancel invoke APDU is received in a call related DISCONNECT message (after a path was reserved) the Terminating PINX shall release the CC Call (path) according to ISO/IEC 11572, delete the information stored for the associated CC Request and enter state CC-Idle.. Any basic call information, if present in the argument of the ccCancel invoke APDU, shall be ignored. If a signalling connection still exists it shall be released according to 7.3 of ISO/IEC 11582.

b) Cancellation initiated by the Terminating PINX:

In order to cancel a CC Request the Terminating PINX shall send a ccCancel invoke APDU to the Originating PINX using call independent signalling, delete the CC Request and enter state CC-Idle.

If a signalling connection exists the ccCancel invoke APDU shall be sent with an argument extArg in a RELEASE message on the existing signalling connection. Cause number 16 "normal call clearing" shall be used.

If no signalling connection exists the ccCancel invoke APDU shall be sent in a SETUP message establishing a new signalling connection according to 7.3 of ISO/IEC 11582. The invoke APDU shall contain in argument fullArg the basic call information stored by the Terminating PINX in relation to that CC Request, as listed in 6.5.3.1.4. If subsequently a RELEASE message is received the signalling connection shall be cleared in accordance with ISO/IEC 11582.

6.5.3.2 Exceptional procedures

6.5.3.2.1 CCBS/CCNR invocation

A CC Request may not be accepted if it is a duplicate of an already stored CC Request. Acceptance of duplicate CC Requests may be restricted to cases where the connection retention method can be used.

NOTE - Duplicate requests can also be caused by the Terminating PINX discarding part of the received basic call information.

If a request for SS-CCBS or SS-CCNR cannot be accepted the Terminating PINX shall return a RELEASE message with a ccbsRequest or ccnrRequest return error APDU on the existing signalling connection. Cause number 16 "normal call clearing" shall be used.

If the failure condition is persistent (e.g. service not provided for User B) error value longTermRejection shall be included.

If the failure condition is transient (e.g. duplicate CC Request, allowed number of active CC Requests exceeded) error value shortTermRejection shall be included.

6.5.3.2.2 Unexpected APDUs

If a call independent SETUP message is received with a ccCancel invoke APDU which cannot be associated with a CC Request the APDU shall be ignored, but the signalling connection shall be released according to 7.3 of ISO/IEC 11582.

If a call related SETUP message is received with a ccRingout invoke APDU that cannot be associated with a CC Request in state CC-Await-Call-Completion, or with a ccPathReserve invoke APDU that cannot be associated with a CC Request in state CC-Await-Call-Completion or CC-Suspended-User-B, the Terminating PINX shall return a call clearing message, according to ISO/IEC 11572, with a ccRingout/ccPathReserve return error APDU with error value failureToMatch.

NOTE - If a call related SETUP message is received with a ccPathReserve invoke APDU and the receiving PINX does not support the Path Reservation method, the APDU shall be rejected as an unrecognised operation according to 8.1 of ISO/IEC 11582.

6.5.3.2.3 User B busy again on Path Reservation attempt

If the Terminating PINX supports the Path Reservation method and User B is busy again on arrival of a SETUP message with a ccPathReserve invoke APDU while in state CC-Await-Call-Completion or CC-Suspended-User-B, the Terminating PINX shall return a call clearing message, according to ISO/IEC 11572 using cause number 17 "user busy", with a ccPathReserve return error APDU with error value remoteUserBusyAgain, resume monitoring of User B and enter state CC-Invoked-User-B.

6.5.3.2.4 User B busy again on CC Call presentation

If User B is busy again when receiving a ccRingout invoke APDU, either in a FACILITY message while in state CC-Path-Complete or in a SETUP message while in state CC-Await-Call-Completion, the Terminating PINX shall return a call clearing message, according to ISO/IEC 11572 using cause number 17 "user busy", with a ccRingout return error APDU with error value remoteUserBusyAgain.

If the service retention option is in use the CC Request shall be retained and monitoring of User B shall be resumed, returning to state CC-Invoked-User-B. If a signalling connection still exists and it is not in ACTIVE state, it shall be released according to 7.3 of ISO/IEC 11582.

If the service retention option is not used the CC Request shall be deleted and state CC-Idle shall be entered. If a signalling connection still exists it shall be released according to 7.3 of ISO/IEC 11582.

6.5.3.2.5 Interruption of CC Call

If a DISCONNECT message without any SS-CC invoke APDU is received for a CC Call in progress (e.g. after successful path reservation) the associated CC Request shall be deleted, and state CC-Idle shall be entered. If a signalling connection still exists it shall be released according to 7.3 of ISO/IEC 11582.

6.5.4 Actions at the Transit PINX

No special actions are required for SS-CC.

6.6 Impact of interworking with public ISDNs

The SS-CCBS procedures specified in this International Standard are compatible with the public ISDN procedures for the T reference point. When interworking with the public ISDN, a Gateway PINX shall perform the procedures specified below.

6.6.1 Incoming Gateway PINX procedures: SS-CCBS request from a public ISDN

If a call from the public ISDN encounters a busy User B in the PISN and if the public ISDN requires to be informed if SS-CCBS is available, the Incoming Gateway PINX shall indicate to the public ISDN that SS-CCBS is available, unless it is known that SS-CCBS is not available.

If a CCBS request is received from the public ISDN the Incoming Gateway PINX shall establish a call independent signalling connection towards the Terminating PINX, according to 7.3 of ISO/IEC 11582. The SETUP message shall include a ccbsRequest invoke APDU, which shall contain in its argument the data received from the public ISDN, the element retain-sig-connection with value TRUE and optionally element can-retain-service, reflecting the corresponding indication from the public ISDN.

The Incoming Gateway PINX shall translate the following APDUs received from the Terminating PINX into corresponding information and send it to the public ISDN: a ccbsRequest return result or return error APDU; a ccExecPossible invoke APDU; a ccCancel invoke APDU.

ccCancel, ccSuspend or ccResume invoke APDUs shall be generated and sent to the Terminating PINX when the Incoming Gateway PINX receives corresponding indications from the public ISDN.

All call independent signalling for a particular CC Request shall use the same call independent signalling connection, which shall remain active until that CC Request terminates.

If a CCBS Call is received from the public ISDN it shall be extended by the Incoming Gateway PINX towards the Terminating PINX, including a ccRingout invoke APDU in the SETUP message.

NOTE - The CCBS Call need not enter the PISN at the same Gateway PINX as the corresponding call independent signalling connection.

When the call independent signalling connection to the Terminating PINX is released the Incoming Gateway PINX shall release the call independent signalling association at the T reference point.

6.6.2 Outgoing Gateway PINX procedures: SS-CCBS request to a public ISDN

NOTE 1 - The Outgoing Gateway PINX cannot pass on an indication that SS-CCBS is possible when received in a clearing message from the public ISDN.

If a CCBS request is destined for the public ISDN the Outgoing Gateway PINX shall translate the ccbsRequest invoke APDU and send it to the public ISDN according to the procedures for the T reference point. When receiving a response the Outgoing Gateway PINX shall generate a ccbsRequest return result APDU (if the CCBS request was accepted) or a return error APDU (if the CCBS request was rejected) and send it to the Originating PINX in a CONNECT message (return result) or in a RELEASE message (return error). The return result APDU shall contain element no-path-reservation with value TRUE and optionally element retain-service, reflecting the corresponding indication from the public ISDN.

NOTE 2 - The sending of the return result APDU in a CONNECT message is in accordance with the connection retention method. This overrides the value FALSE in element retain-sig-connection, if present in the ccbsRequest invoke APDU.

ccExecPossible or ccCancel invoke APDUs shall be generated and sent to the Originating PINX when the Outgoing Gateway PINX receives corresponding indications from the public ISDN.

The Outgoing Gateway PINX shall translate the following APDUs received from the Originating PINX into corresponding information and send it to the public ISDN: A ccSuspend invoke APDU; a ccResume invoke APDU; a ccCancel invoke APDU.

All call independent signalling for a particular CC Request shall use the same call independent signalling connection, which shall remain active until that CC Request terminates.

A CCBS Call without Path Reservation shall be extended by the Outgoing Gateway PINX to the public ISDN.

NOTE 3 - The CCBS Call need not leave the PISN at the same Gateway PINX as the call independent signalling connection.

When the call independent signalling connection to the Originating PINX is released the Outgoing Gateway PINX shall release the call independent signalling association at the T reference point.

A Path Reservation attempt from the Originating PINX shall be abandoned by the Outgoing Gateway PINX by returning a DISCONNECT message with a ccPathReserve return error APDU indicating error value failedDueToInterworking.

6.7 Impact of interworking with non-ISDNs

6.7.1 Incoming Gateway PINX procedures

If a non-ISDN network offers an equivalent supplementary service, SS-CCBS or SS-CCNR can be invoked on request of that network if the SS-CC options supported by both the Incoming Gateway PINX and the Terminating PINX are compatible with the service offered by the non-ISDN network.

When sending a ccbsRequest or ccnrRequest invoke APDU, the Incoming Gateway PINX shall include an element retain-sig-connection:

- with value FALSE if, for compatibility with the other network or for other reasons, the Incoming Gateway PINX prefers the use of the connection release method;
- with value TRUE if, for compatibility with the other network, it is necessary to use the connection retention method.

Otherwise the element shall be omitted.

The Incoming Gateway PINX may also include an element can-retain-service with value TRUE if the other network supports the service retention capability.

If an element retain-sig-connection with value FALSE was sent but the Terminating PINX uses the connection retention method, sending the return result APDU in a CONNECT message, the Incoming Gateway PINX shall reject the service request from the other network and initiate cancellation procedures within the PISN if it is unable to interwork using the connection retention method.

6.7.2 Outgoing Gateway PINX procedures

If a non-ISDN network offers an equivalent supplementary service, SS-CCBS or SS-CCNR can be invoked in that network if the SS-CC options supported by both the Originating PINX and the Outgoing Gateway PINX are compatible with the service offered by the non-ISDN network.

When sending a ccbsRequest or ccnrRequest return result APDU, the Outgoing Gateway PINX shall include an element no-path-reservation with value TRUE if the other network is unable to support the path reservation method. In all other cases this element shall either be omitted or have the value FALSE.

The Outgoing Gateway PINX may also include an element retain-service with value TRUE if element can-retain-service was sent in the corresponding invoke APDU and the other network indicated support of service retention. In all other cases this element shall either be omitted or have the value FALSE.

If in the invoke APDU element retain-sig-connection was sent with value TRUE, the Outgoing Gateway PINX shall not employ the connection release method. If unable to interwork using the connection retention method, the Outgoing Gateway PINX shall respond with a return error APDU.

If in the invoke APDU no element retain-sig-connection was present, the Outgoing Gateway PINX shall select either the connection retention method or the connection release method, depending on the capabilities of the other network. If the element was present in the invoke APDU with value FALSE, the Outgoing Gateway PINX should, if possible, use the connection release method.

6.8 Protocol interaction between SS-CCBS and Other Supplementary Services and ANFs

This clause specifies protocol interactions of SS-CCBS with other supplementary services and ANFs for which stage 3 standards had been published at the time of publication of this International Standard. For interactions with supplementary services and ANFs for which stage 3 standards are published subsequent to the publication of this International Standard, see those other stage 3 standards.

NOTE 1 - Simultaneous conveyance of APDUs for SS-CCBS and another supplementary service or ANF in the same message, each in accordance with the requirements of its respective stage 3 standards, does not, on its own, constitute a protocol interaction.

NOTE 2 - Additional interactions that have no impact on the signalling protocol at the Q reference point can be found in the relevant stage 1 specifications.

6.8.1 Calling Name Identification Presentation (SS-CNIP)

No protocol interaction.

6.8.2 Connected Name Identification Presentation (SS-CONP)

No protocol interaction.

6.8.3 Completion of Calls on No Reply (SS-CCNR)

No protocol interaction.

6.8.4 Call Transfer

No protocol interaction.

6.8.5 Call Forwarding Unconditional (SS-CFU)

The following interactions shall apply if SS-CFU is supported in accordance with ISO/IEC 13873.

6.8.5.1 Originating PINX procedures for invoking SS-CCBS at a SS-CFU diverted-to user

NOTE - In this case the Originating PINX with regard to SS-CCBS is also the Originating PINX with regard to SS-CFU.

If SS-CCBS is to be invoked at a busy diverted - to user, the Originating PINX shall store the content of element nominatedNr, if received in the argument of operation divertingLegInformation1, and use it as:

- element numberB in the argument of any SS-CCBS operation which requires this element;
- Called party number information element in the SETUP message of any call independent signalling procedure;
- Called party number information element in the SETUP message of the CC Call.

The address of the originally called user shall not be used for CCBS.

If element nominatedNr is not available, a SS-CCBS request received from User A shall be rejected.

6.8.5.2 Originating PINX procedures if SS-CFU is activated by User A

NOTE 1 - In this case the Originating PINX with regard to SS-CCBS is the Served User PINX with regard to SS-CFU.

NOTE 2 - If SS-CCBS User A, having a SS-CCBS request outstanding against User B, has activated SS-CFU and the connection release option of SS-CCBS applies, an arriving call independent signalling connection (conveying a ccExecPossible invoke APDU or a ccCancel invoke APDU is not an incoming call and therefore will not be diverted.

6.8.5.3 Terminating PINX procedures if SS-CFU is activated by User B after SS-CCBS has been invoked

No protocol interaction.

6.8.6 Call Forwarding Busy (SS-CFB)

The following interaction shall apply if SS-CFB is supported in accordance with ISO/IEC 13873.

6.8.6.1 Originating PINX procedures for invoking SS-CCBS at a SS-CFB diverted-to user

NOTE - In this case the Originating PINX with regard to SS-CCBS is also the Originating PINX with regard to SS-CFB.

The procedures of 6.8.5.1 shall apply.

6.8.6.2 Originating PINX procedures if SS-CFB is activated by User A

No protocol interaction.

6.8.6.3 Terminating PINX procedures if SS-CFB is activated by User B after SS-CCBS has been invoked

No protocol interaction.

6.8.7 Call Forwarding No Reply (SS-CFNR)

No protocol interaction.

6.8.8 Call Deflection (SS-CD)

The protocol interactions with Call Deflection Immediate shall be as specified in 6.8.5 for interaction with SS-CFU.

The protocol interactions with Call Deflection from Alert shall be as specified in 6.8.7 for interaction with SS-CFNR.

6.8.9 Path Replacement (ANF-PR)

No protocol interaction

6.9 Protocol interaction between SS-CCNR and other supplementary Services and ANFs

This clause specifies protocol interactions of SS-CCNR with other supplementary services and ANFs for which stage 3 standards had been published at the time of publication of this International Standard. For interactions with supplementary services and ANFs for which stage 3 standards are published subsequent to the publication of this International Standard, see those other stage 3 standards.

NOTE 1 - Simultaneous conveyance of APDUs for SS-CCNR and another supplementary service or ANF in the same message, each in accordance with the requirements of its respective stage 3 standards, does not, on its own, constitute a protocol interaction.

NOTE 2 - Additional interactions that have no impact on the signalling protocol at the Q reference point can be found in the relevant stage 1 specifications.

6.9.1 Calling Name Identification Presentation (SS-CNIP)

No protocol interaction.

6.9.2 Connected Name Identification Presentation (SS-CONP)

No protocol interaction.

6.9.3 Completion of Calls to Busy Subscribers (SS-CCBS)

No protocol interaction.

6.9.4 Call Transfer

No protocol interaction.

6.9.5 Call Forwarding Unconditional (SS-CFU)

The following interactions shall apply if SS-CFU is supported in accordance with ISO/IEC 13873.

6.9.5.1 Originating PINX procedures for invoking SS-CCNR at a SS-CFU diverted-to user

NOTE - In this case the Originating PINX with regard to SS-CCNR is also the Originating PINX with regard to SS-CFU.

If SS-CCNR is to be invoked at a diverted - to user who does not answer, the Originating PINX shall store the content of element nominatedNr, if received in the argument of operation divertingLegInformation1, and use it:

- as element numberB in the argument of any SS-CCNR operation which requires this element;
- as Called party number information element in the SETUP message of any call independent signalling procedure;
- as Called party number information element in the SETUP message of the CC Call.

The address of the originally called user shall not be used for CCNR.

If element nominatedNr is not available, a SS-CCNR request received from User A shall be rejected.

6.9.5.2 Originating PINX procedures if SS-CFU is activated by User A

NOTE 1 - In this case the Originating PINX with regard to SS-CCNR is the Served User PINX with regard to SS-CFU.

NOTE 2 - If SS-CCNR User A, having a SS-CCNR request outstanding against User B, has activated SS-CFU and the connection release option of SS-CCNR applies, an arriving call independent signalling connection (conveying a ccExecPossible invoke APDU or a ccCancel invoke APDU) is not an incoming call and therefore will not be diverted.

6.9.5.3 Terminating PINX procedures if SS-CFU is activated by User B after SS-CCNR has been invoked

No protocol interaction.

6.9.6 Call Forwarding Busy (SS-CFB)

The following interaction shall apply if SS-CFB is supported in accordance with ISO/IEC 13873.

6.9.6.1 Originating PINX procedures for invoking SS-CCNR at a SS-CFB diverted-to user

NOTE - In this case the Originating PINX with regard to SS-CCBS is also the Originating PINX with regard to SS-CFB.

The procedures of 6.9.5.1 shall apply.

6.9.6.2 Originating PINX procedures if SS-CFB is activated by User A

No protocol interaction.

6.9.6.3 Terminating PINX procedures if SS-CFB is activated by User B after SS-CCNR has been invoked

No protocol interaction.

6.9.7 Call Forwarding No Reply (SS-CFNR)

The following interaction shall apply if SS-CFNR is supported in accordance with ISO/IEC 13873.

6.9.7.1 Originating PINX procedures for invoking SS-CCNR at a SS-CFNR diverted-to user

The procedures of 6.9.5.1 shall apply.

6.9.7.2 Originating PINX procedures if SS-CFNR is activated by User A

No protocol interaction.

6.9.7.3 Terminating PINX procedures if SS-CFNR is activated by User B after SS-CCNR has been invoked

No protocol interaction.

6.9.8 Call Deflection (SS-CD)

The protocol interactions with Call Deflection Immediate shall be as specified in 6.9.5 for interaction with SS-CFU.

The protocol interactions with Call Deflection from Alert shall be as specified in 6.9.7 for interaction with SS-CFNR.

6.9.9 Path Replacement (ANF-PR)

No protocol interaction.

6.10 Parameter values (timers)

6.10.1 Timers at the Originating PINX

The Originating PINX shall implement the following timers.

Timer T1: Request Protection

This timer is started when sending a ccbsRequest or ccnrRequest invoke APDU and stopped on receipt of a response.

If timer T1 expires a failure indication is sent to User A.

Timer T1 shall have a duration in the range 10 - 30 seconds.

Timer T2: SS-CC Service Duration

This timer is started on receipt of the ccbsRequest or ccnrRequest return result APDU and stopped on completion of the CC Call or if the CC Request is cancelled.

If timer T2 expires the CC Request is cancelled.

The duration of timer T2 is implementation dependent.

Timer T3: Recall

This timer is started when the SS-CC Recall is indicated to User A and stopped when User A responds.

If timer T3 expires the CC Request is cancelled.

Timer T3 shall have a duration in the range 10 - 30 seconds.

Timer T4: Path Reservation Protection

This timer is started when sending a ccPathReserve invoke APDU and stopped on receipt of a ccPathReserve return result or return error APDU.

If timer T4 expires the CC Request is cancelled.

Timer T4 shall have a duration in the range 30 - 40 seconds.

6.10.2 Timers at the Terminating PINX

None.

Annex A (normative)

Protocol Implementation Conformance Statement (PICS) proforma

A.1 Introduction

The supplier of a protocol implementation which is claimed to conform to this International Standard shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A completed PICS proforma is the PICS for the implementation in question. The PICS is a statement of which capabilities and options of the protocol have been implemented. The PICS can have a number of uses, including use:

- by the protocol implementor, as a check list to reduce the risk of failure to conform to the Standard through oversight;
- by the supplier and acquirer, or potential acquirer, of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the Standard's PICS proforma;
- by the user or potential user of the implementation, as a basis for initially checking the possibility of interworking with another implementation - while interworking can never be guaranteed, failure to interwork can often be predicted from incompatible PICS's.
- by a protocol tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

A.2 Instructions for completing the PICS proforma

A.2.1 General structure of the PICS proforma

The PICS proforma is a fixed format questionnaire divided into subclauses each containing a group of individual items. Each item is identified by an item number, the name of the item (question to be answered), and the reference(s) to the clause(s) specifying the item in the main body of this International Standard.

The "Status" column indicates whether an item is applicable and if so whether support is mandatory or optional. The following terms are used:

m	mandatory (the capability is required for conformance to the protocol);
o	optional (the capability is not required for conformance to the protocol, but if the capability is implemented it is required to conform to the protocol specifications);
o.<n>	optional, but support of at least one of the group of options labelled by the same numeral <n> is required;
x	prohibited;
c.<cond>	conditional requirement, depending on support for the item or items listed in condition <cond>;
<item>;m	simple conditional requirement, the capability being mandatory if item number <item> is supported, otherwise not applicable;
<item>;o	simple conditional requirement, the capability being optional if item number <item> is supported, otherwise not applicable.

Answers to the questionnaire items are to be provided either in the "Support" column, by simply marking an answer to indicate a restricted choice (Yes or No), or in the "Not Applicable" column (N/A).

A.2.2 Additional Information

Items of Additional Information allow a supplier to provide further information intended to assist the interpretation of the PICS. It is not intended or expected that a large quantity will be supplied, and a PICS can be considered complete without any such information. Examples might be an outline of the ways in which a (single) implementation can be set up to operate in a variety of environments and configurations.

References to items of Additional Information may be entered next to any answer in the questionnaire, and may be included in items of Exception information.

A.2.3 Exception Information

It may occasionally happen that a supplier will wish to answer an item with mandatory or prohibited status (after any conditions have been applied) in a way that conflicts with the indicated requirement. No pre-printed answer will be found in the Support column for this. Instead, the supplier is required to write into the Support column an x.<i> reference to an item of Exception Information, and to provide the appropriate rationale in the Exception item itself.

An implementation for which an Exception item is required in this way does not conform to this International Standard. A possible reason for the situation described above is that a defect in the Standard has been reported, a correction for which is expected to change the requirement not met by the implementation.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13870:2003

A.3 PICS proforma for ISO/IEC 13870**A.3.1 Implementation Identification**

Supplier	
Contact point for queries about the PICS	
Implementation Name(s) and Version(s)	
Other information necessary for full identification, e.g., name(s) and version(s) for machines and/or operating systems; system name(s)	

Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirement for full identification.

The terms Name and Version should be interpreted appropriately to correspond with a supplier's terminology (e.g., Type, Series, Model).

A.3.2 Protocol Summary

Protocol Version	1.0
Addenda Implemented (if applicable)	
Amendments Implemented	
Have any exception items been required (see A.2.3) ?	No [] Yes [] (The answer YES means that the implementation does not conform to this International Standard)
Date of Statement	

A.3.3 General

Item	Question / feature	Reference	Status	N/A	Support
A1	PINX can act as Originating PINX		o.1		Yes [] No []
A2	PINX can act as Terminating PINX		o.1		Yes [] No []
A3	Support of CCBS		o.2		Yes [] No []
A4	Support of CCNR		o.2		Yes [] No []
A5	Incoming Gateway Function		o		Yes [] No []
A6	Outgoing Gateway Function		o		Yes [] No []
A7	Support of (Path-) Non-reservation method		m		Yes []
A8	Support of Path Reservation method		o		Yes [] No []
A9	Support of Service Retention option		o		Yes [] No []
A10	Support of relevant procedures of ISO/IEC 11572 and ISO/IEC 11582	6.2	m		Yes []

A.3.4 Procedures at the Originating PINX

This table shall apply only if item A1 is supported.

Item	Question / feature	Reference	Status	N/A	Support
B1	CCBS invocation	6.5.2.1.1 6.5.2.1.3	A3:m	[]	m:Yes []
B2	CCNR invocation	6.5.2.1.2 6.5.2.1.3	A4:m	[]	m:Yes []
B3	Procedures for connection retention method	6.5.2.1	m		Yes []
B4	Procedures for connection release method	6.5.2.1	o		Yes [] No []
B5	Procedures for receiving indication that User B is not busy	6.5.2.1.4	m		Yes []
B6	Set up CC Call without Path Reservation	6.5.2.1.5	m		Yes []
B7	Set up CC Call with Path Reservation	6.5.2.1.6	o	[]	o: Yes [] No []
B8	Procedures for User A busy, (path-) non-reservation method	6.5.2.1.7	m		Yes []
B9	Procedures for User A busy, path reservation method	6.5.2.1.8 6.5.2.1.9	B7:m	[]	m:Yes []
B10	Cancellation of a CC Request	6.5.2.1.10	m		Yes []
B11	Exceptional procedures except failure of CC Call presentation	6.5.2.2.1 through 6.5.2.2.5	m		Yes []
B12	Failure of CC Call presentation, service retention if User B is busy again	6.5.2.2.6	A9:m	[]	m:Yes []
B13	Failure of CC Call presentation, no service retention if User B is busy again, failure indication to User A	6.5.2.2.6	o.1		Yes [] No []
B14	Failure of CC Call presentation, no service retention if User B is busy again, automatic re-invocation of SS-CCBS	6.5.2.2.6	o.1		Yes [] No []
B15	Failure of Path Reservation due to "unrecognisedOperation" or "failedDueToInterworking": CC Call without Path Reservation	6.5.2.2.5	o.3		Yes [] No []
B16	Failure of Path Reservation due to "unrecognisedOperation" or "failedDueToInterworking": retry Path Reservation on another route	6.5.2.2.5	o.3		Yes [] No []

B17	Failure of Path Reservation due to "unrecognisedOperation" or "failedDueToInterworking": cancel the CC Request	6.5.2.2.5	o.3		Yes [] No []
B18	Failure of Path Reservation due to network congestion: retry to establish a path	6.5.2.2.5	o.2		Yes [] No []
B19	Failure of the Path Reservation due to network congestion: cancel the CC Request	6.5.2.2.5	o.2		Yes [] No []
B20	Support of the suspend option before Path Reservation when user A is busy	6.5.2.1.8	A8:o	[]	o: Yes [] No []

IECNORM.COM : Click to view the full PDF of ISO/IEC 13870:2003

A.3.5 Procedures at the Terminating PINX

This table shall apply only if item A2 is supported.

Item	Question / feature	Reference	Status	N/A	Support
C1	CCBS invocation	6.5.3.1.1 6.5.3.1.3	A3:m	[]	m:Yes []
C2	CCNR invocation	6.5.3.1.2 6.5.3.1.3	A4:m	[]	m:Yes []
C3	Procedures for connection retention method	6.5.3.1	m		Yes []
C4	Procedures for connection release method	6.5.3.1	m		Yes []
C5	Procedures for indicating that User B is not busy	6.5.3.1.4	m		Yes []
C6	Receive CC Call without Path Reservation	6.5.3.1.5	m		Yes []
C7	Receive CC Call with Path Reservation	6.5.3.1.6	c.1		m:Yes [] o: Yes [] No []
C8	CCBS/CCNR suspension / resumption	6.5.3.1.7	m		Yes []
C9	Cancellation of a CC Request	6.5.3.1.8	m		Yes []
C10	Exceptional procedures except User B Busy again on CC Call presentation	6.5.3.2.1 6.5.3.2.2 6.5.3.2.3 6.5.3.2.5	m		Yes []
C11	Service retention procedure if User B is busy again on CC Call presentation	6.5.3.2.4	A9:m	[]	m:Yes []
C12	Procedure without service retention if User B is busy again on CC Call presentation	6.5.3.2.4	m		Yes []
C13	Force the use of non-reservation method	6.5.3.1.3 or 6.6.2 or 6.7.2	o		Yes [] No []

c.1: if C13 then o else m

A.3.6 Procedures at a Gateway PINX

This table shall apply only if item A5 or A6 is supported.

Item	Question / feature	Reference	Status	N/A	Support
D1	Interworking if CCBS Request comes from a public ISDN	6.6.1	A5:o.1	<input type="checkbox"/>	o: Yes <input type="checkbox"/> No <input type="checkbox"/>
D2	Interworking if CCBS/CCNR Request comes from a non-ISDN	6.7.1	A5:o.1	<input type="checkbox"/>	o: Yes <input type="checkbox"/> No <input type="checkbox"/>
D3	Interworking if CCBS Request goes to a public ISDN	6.6.2	A6:o.2	<input type="checkbox"/>	o: Yes <input type="checkbox"/> No <input type="checkbox"/>
D4	Interworking if CCBS/CCNR Request goes to a non-ISDN	6.7.2	A6:o.2	<input type="checkbox"/>	o: Yes <input type="checkbox"/> No <input type="checkbox"/>

IECNORM.COM : Click to view the full PDF of ISO/IEC 13870:2003

A.3.7 Coding

Item	Question / feature	Reference	Status	N/A	Support
E1	Sending and receipt of ccbsRequest invoke APDUs	6.3.1	A3:m	[]	m:Yes []
E2	Sending and receipt of ccnrRequest invoke APDUs	6.3.1	A4:m	[]	m:Yes []
E3	Sending and receipt of ccCancel invoke APDU	6.3.1	m		Yes []
E4	Sending of ccExecPossible invoke APDU	6.3.1	c.1	[]	m:Yes []
E5	Receipt of ccExecPossible invoke APDU	6.3.1	c.2	[]	m:Yes []
E6	Sending of ccPathReserve invoke and receipt of return result and return error APDUs	6.3.1	c.3	[]	m:Yes [] o: Yes [] No []
E7	Receipt of ccPathReserve invoke and sending of return result or return error APDUs	6.3.1	c.4	[]	m:Yes [] o: Yes [] No []
E8	Sending of ccRingout invoke and receipt of return error APDU	6.3.1	c.2	[]	m:Yes []
E9	Receipt of ccRingout invoke and sending of return error APDU	6.3.1	c.1	[]	m:Yes []
E10	Sending of ccSuspend invoke APDU	6.3.1	c.2	[]	m:Yes []
E11	Receipt of ccSuspend invoke APDU	6.3.1	c.1	[]	m:Yes []
E12	Sending of ccResume invoke APDU	6.3.1	c.2	[]	m:Yes []
E13	Receipt of ccResume invoke APDU	6.3.1	c.1	[]	m:Yes []

c.1: if (A2 or A6) then m else N/A

c.2: if (A1 or A5) then m else N/A

c.3: if (A1 and B7) then m else if D2 then o else N/A

c.4: if (A2 and A8) then m else if D4 then o else N/A

A.3.8 Interactions between SS-CCBS and SS-CFU/SS-CDI

Item	Question/feature	Reference	Status	N/A	Support
F1	Support of SS-CFU or SS-CDI		o		Yes [] No []
F2	Originating PINX procedures for invoking SS-CCBS at an SS-CFU/SS-CDI diverted-to user	6.8.5.1	c.1	[]	Yes [] No []

c.1: if F1 and A1 and A3 then optional, else N/A

A.3.9 Interactions between SS-CCBS and SS-CFB

Item	Question/feature	Reference	Status	N/A	Support
G1	Support of SS-CFB		o		Yes [] No []
G2	Originating PINX procedures for invoking SS-CCBS at an SS-CFB diverted-to user	6.8.6.1	c.1	[]	Yes [] No []

c.1: if G1 and A1 and A3 then optional, else N/A

A.3.10 Interactions between SS-CCNR and SS-CFU/SS-CDI

Item	Question/feature	Reference	Status	N/A	Support
H1	Support of SS-CFU or SS-CDI		o		Yes [] No []
H2	Originating PINX procedures for invoking SS-CCNR at an SS-CFU/SS-CDI diverted-to user	6.9.5.1	c.1	[]	Yes [] No []

c.1: if H1 and A1 and A4 then optional, else N/A

A.3.11 Interactions between SS-CCNR and SS-CFB

Item	Question/feature	Reference	Status	N/A	Support
I1	Support of SS-CFB		o		Yes [] No []
I2	Originating PINX procedures for invoking SS-CCNR at an SS-CFB diverted-to user	6.9.6.1	c.1	[]	Yes [] No []

c.1: if I1 and A1 and A4 then optional, else N/A

A.3.12 Interactions between SS-CCNR and SS-CFNR/SS-CDA

Item	Question/feature	Reference	Status	N/A	Support
J1	Support of SS-CFNR or SS-CDA		o		Yes [] No []
J2	Originating PINX procedures for invoking SS-CCNR at an SS-CFNR/SS-CDA diverted-to user	6.9.7.1	c.1	[]	Yes [] No []

c.1: if J1 and A1 and A4 then optional, else N/A

A.3.13 Timers

Item	Question / feature	References	Status	N/A	Support
K1	Support of timer T1	6.10.1	A1:m	[]	m:Yes [] Value:
K2	Support of timer T2	6.10.1	A1:m	[]	m:Yes [] Value:
K3	Support of timer T3	6.10.1	A1:m	[]	m:Yes [] Value:
K4	Support of timer T4	6.10.1	c.1	[]	m:Yes [] Value:

c.1: if (A1 and B7) then m else N/A

Annex B
(informative)

Imported ASN.1 definitions

The content of this annex has been deleted to remove duplicate ASN.1 definitions defined elsewhere.

IECNORM.COM : Click to view the full PDF of ISO/IEC 13870:2003


Annex C

(informative)

Examples of messages sequences

This annex describes some typical message flows for SS-CCBS and SS-CCNR. The following conventions are used in the figures of this annex.

1. The following notation is used:

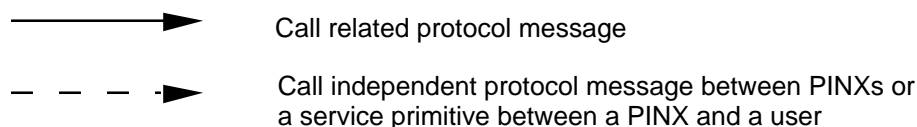

SETUP	Message name
Cx	Number of connection x
xxx.inv	Invoke APDU for operation xxx
xxx.rr	Return result APDU for operation xxx
xxx.re	Return error APDU for operation xxx

2. The figures show messages exchanged via Protocol Control between the Originating PINX (PINX A) and a Transit PINX and between a Transit PINX and the Terminating PINX (PINX B). Only messages relevant to SS-CC are shown.
NOTE - Transit PINXs do not take an active part in the operation of SS-CC.
3. Only the relevant information content (SS-CC APDUs) is listed below each message name. The Facility information elements containing the SS-CC_APDUs are not explicitly shown. Information with no impact on SS-CC is not shown.
4. Some interactions with users are included in form of symbolic primitives. The actual protocol at the terminal interface is outside the scope of this International Standard.
5. Each end-to-end signalling connection (call related or call independent) is assigned a number (Cx). Every message name is accompanied by the number of the respective signalling connection to which it relates.

C.1 Successful CCBS

C.1.1 With path reservation and connection release

Figure C.1 shows an example message flow of a successful CCBS request and recall with path reservation. It is assumed that the signalling connection is released during the monitoring phase.

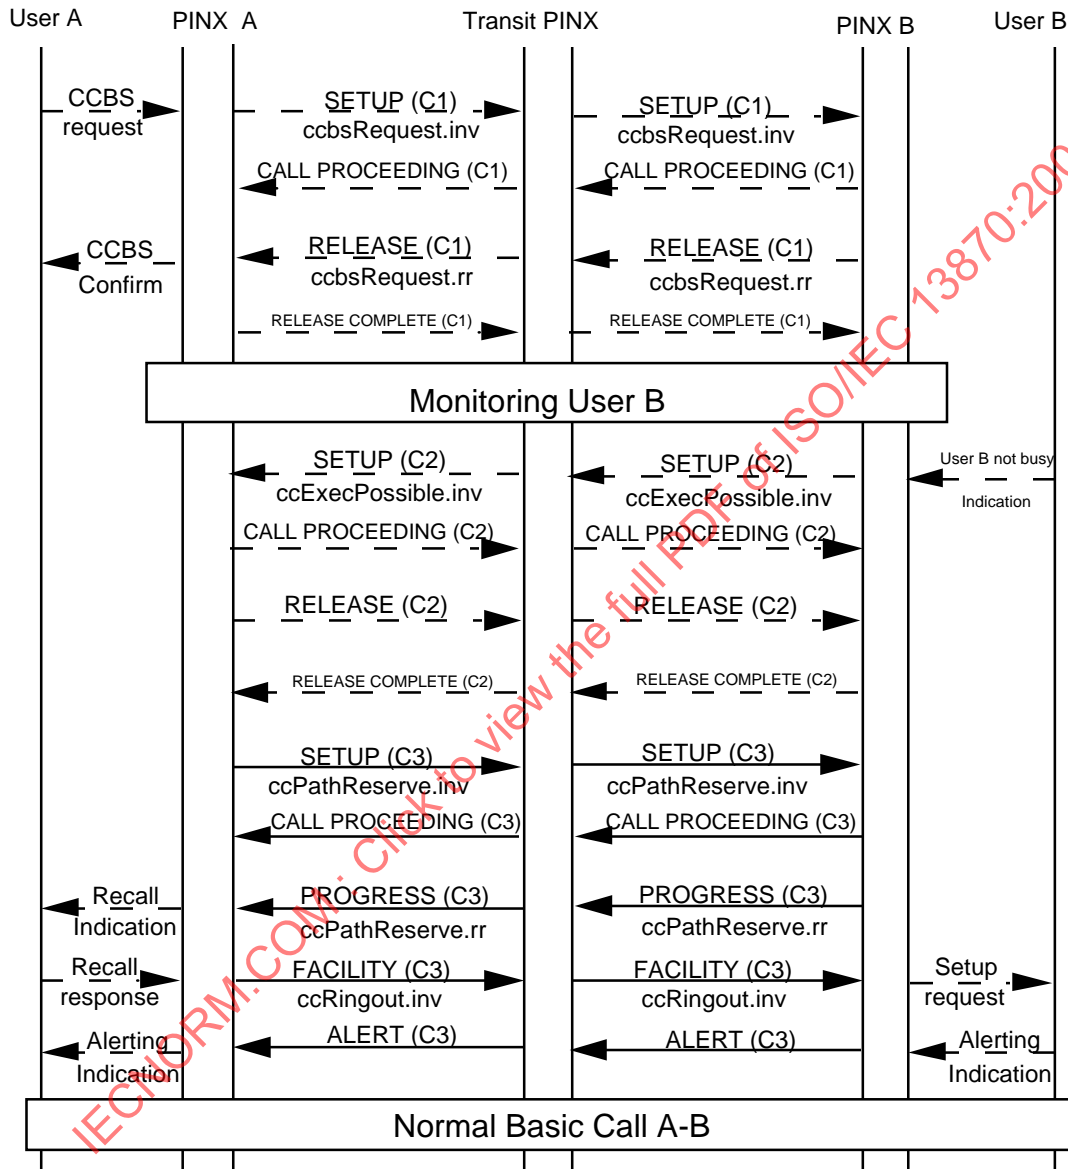


Figure C.1 - Example Message Flow for Successful CCBS with path reservation

C.1.2 Without path reservation

Figure C.2 shows a successful CCBS request and recall without path reservation. The signalling connection is retained during the monitoring phase.

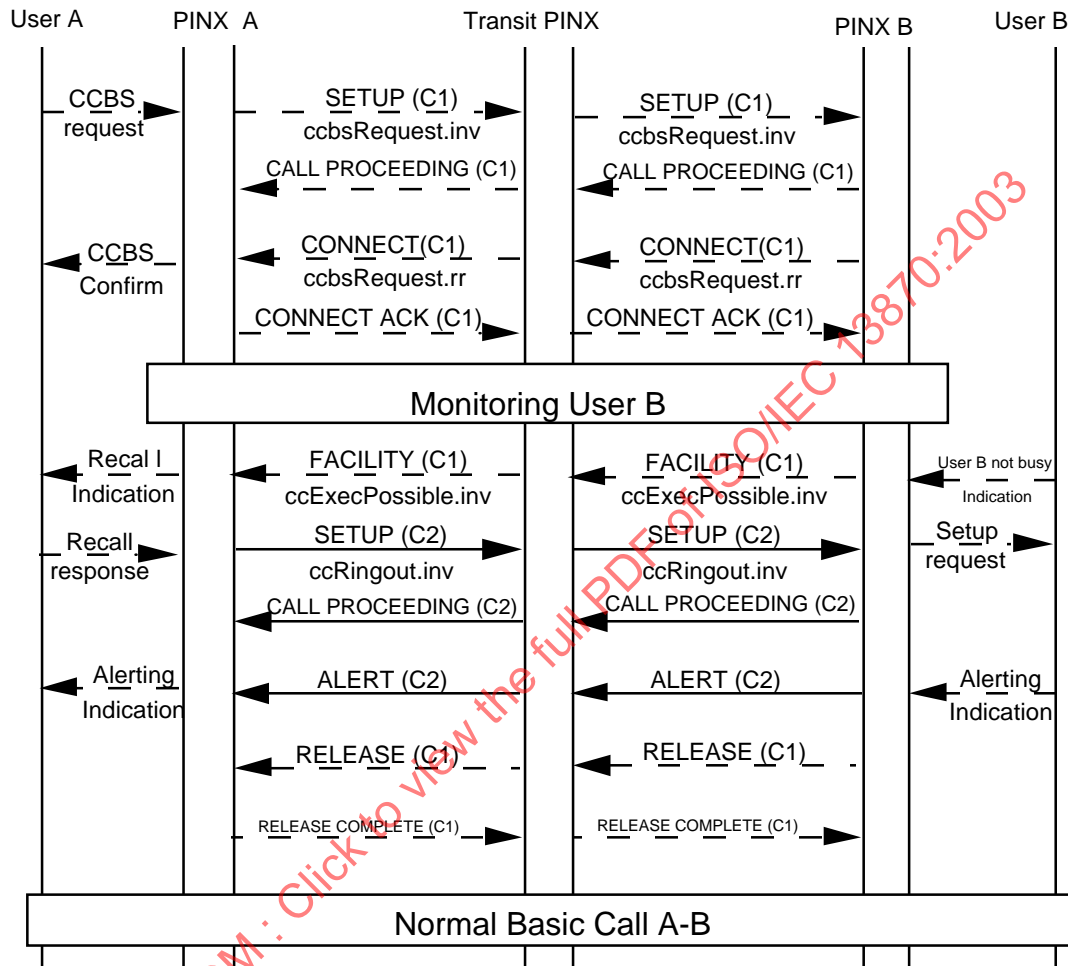


Figure C.2 - Example message Flow for successful CCBS without path reservation

C.2 Successful CCNR

Figure C.3 shows a successful CCNR request without connection retention.

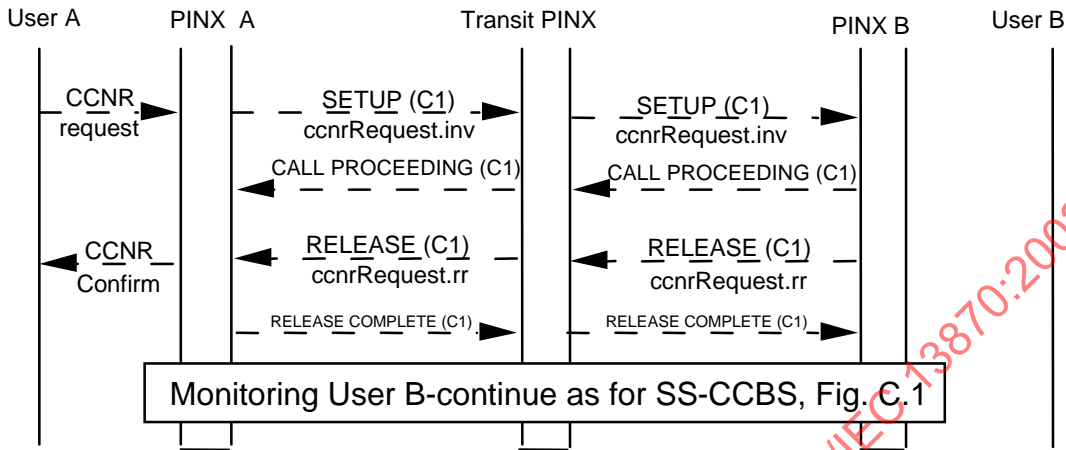


Figure C.3 - Example message flow for successful CCNR

C.3 User A busy

C.3.1 Path reservation case

Figure C.4 shows a CC Request which encounters User A busy when User B is not busy and a subsequent CC Call with path reservation when both users are not busy. It is assumed that the signalling connection has been retained.

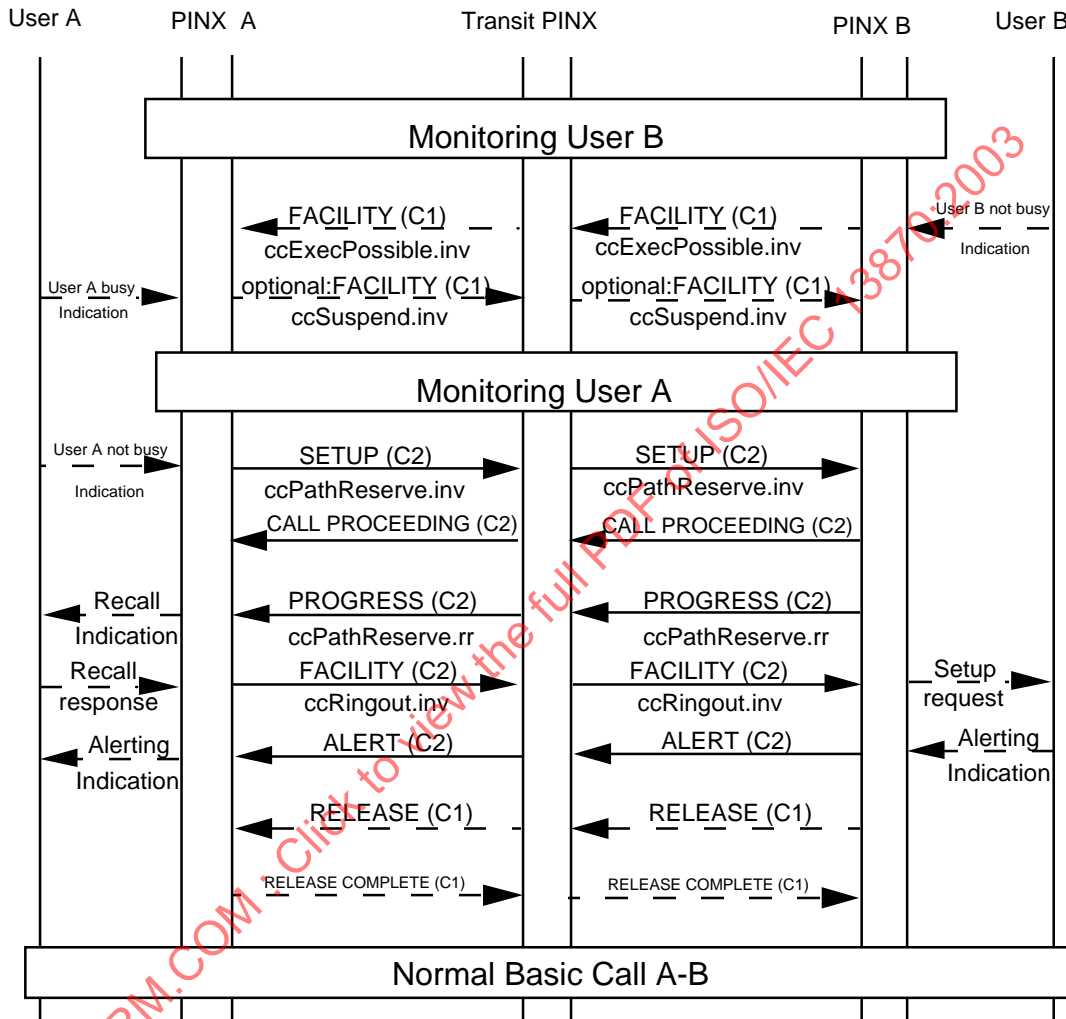


Figure C.4 - Example message flow for User A Busy, path reservation case

C.3.2 Non-reservation case

Figure C.5 shows a CC Request which encounters User A busy when User B is not busy and a subsequent CC Call without path reservation when both users are not busy.

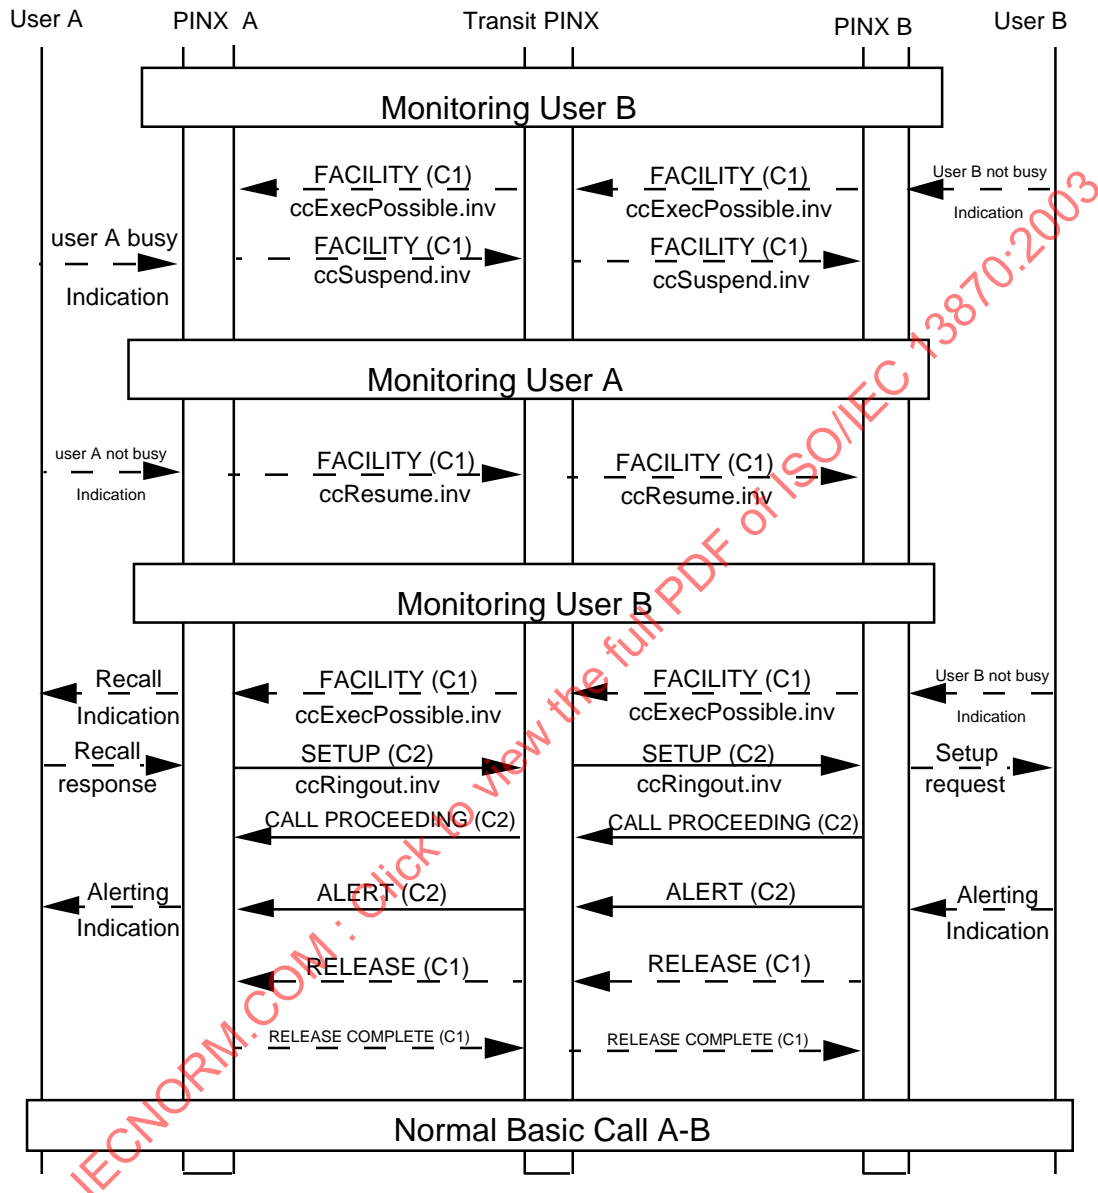


Figure C.5 - Example message flow for User A Busy, non-reservation case

C.4 User B busy again

C.4.1 At path reservation

Figure C.6 shows the case that a path reservation attempt encounters User B busy again.

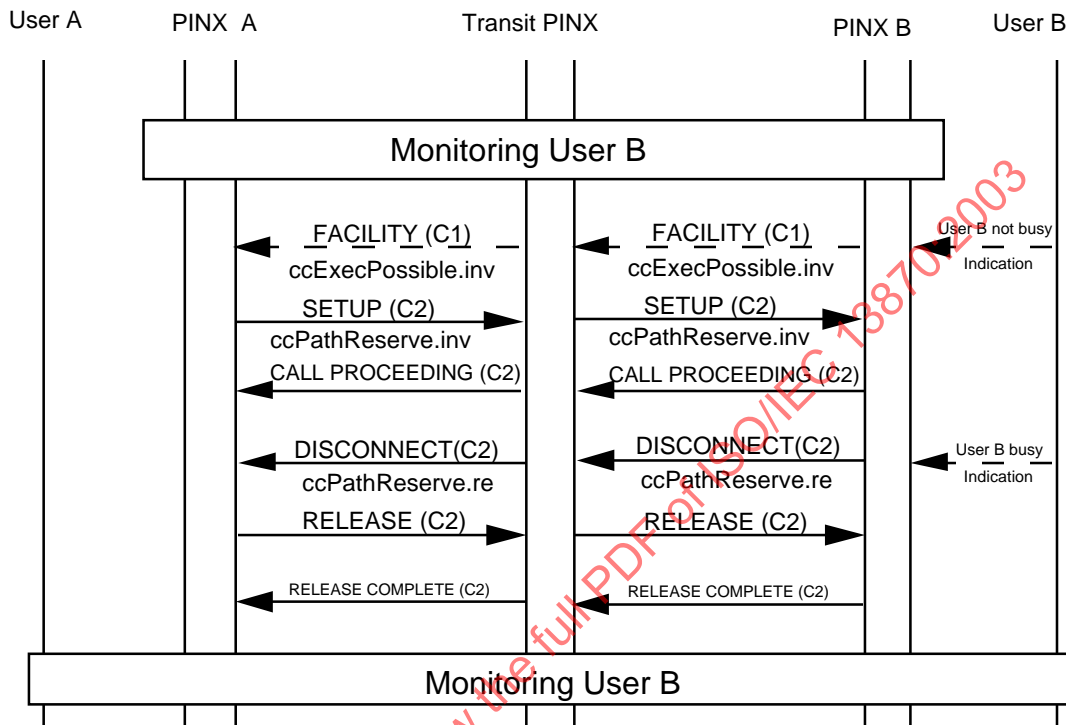


Figure C.6 - Example message flow for User B on path reservation

C.4.2 At CC Call presentation - without path reservation, without service retention

Figure C.7 shows the case that a CC Call without path reservation encounters User B busy again and the service is not retained.

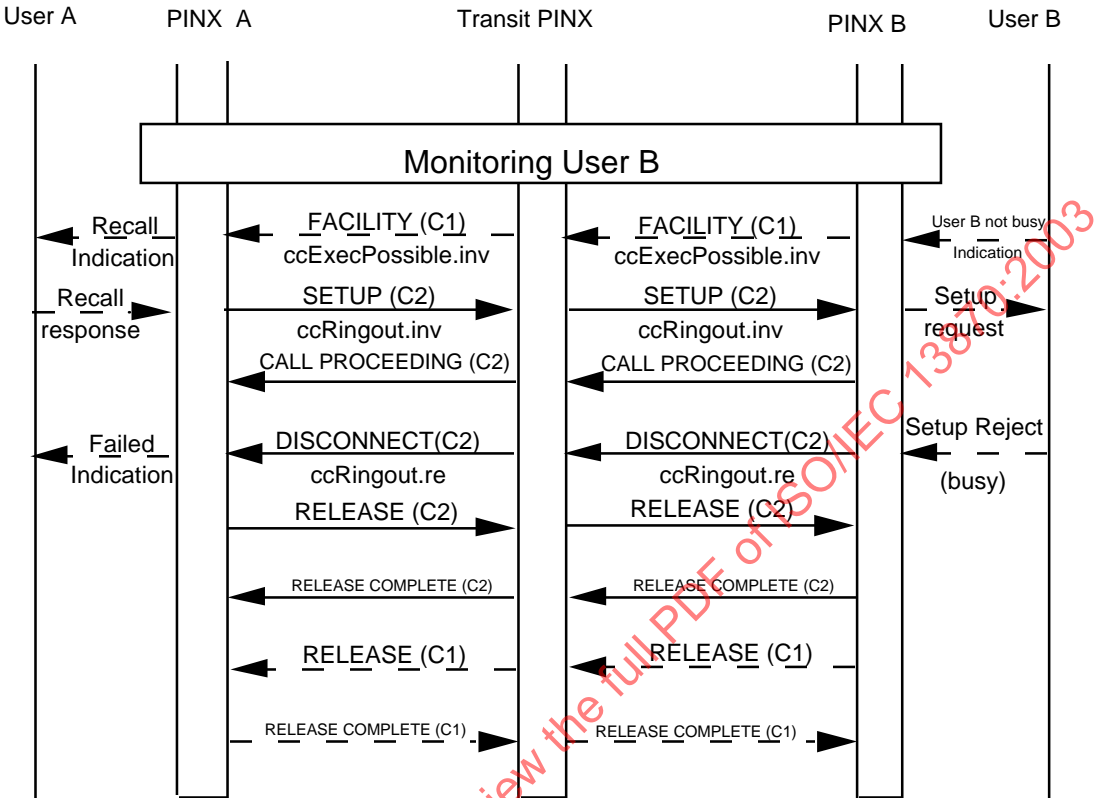


Figure C.7 - Example Message Flow for User B Busy Without Service Retention

C.4.3 At CC Call presentation - without path reservation, with service retention

Figure C.8 shows the case that a CC Call without path reservation encounters User B busy again and the service is retained.

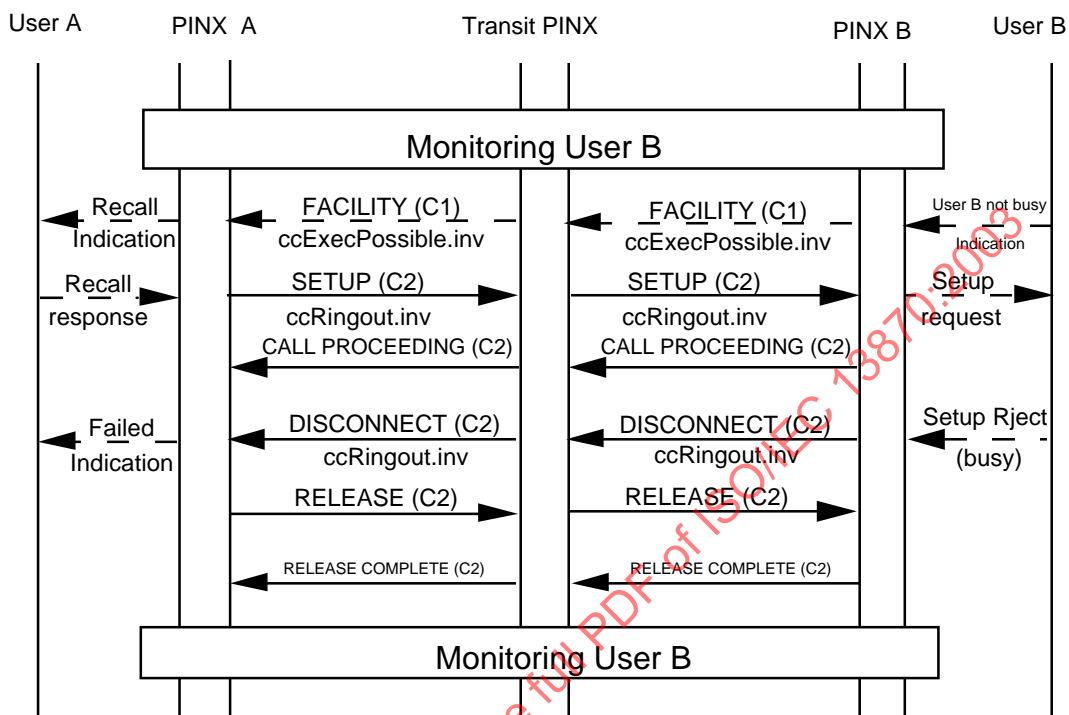


Figure C.8 - Example Message Flow for User B Busy with Service Retention

Annex D (informative)

Specification and Description Language (SDL) Representation of Procedures

The diagrams in this annex use the Specification and Description Language defined in ITU-T Rec. Z.100.

Each diagram represents the behaviour of an SS-CC Supplementary Service Control entity at a particular type of PINX. In accordance with the protocol model described in ISO/IEC 11582, the Supplementary Service Control entity uses, via the Coordination Function, the services of Generic Functional Procedures Control and Basic Call Control.

Where an output symbol represents a primitive to the Coordination Function, and that primitive results in a message being sent, the output symbol bears the name of the message and any remote operations APDU(s) contained in that message. In the case of a message specified in ISO/IEC 11572, basic call actions associated with the sending of that message are deemed to occur. In the case of a call independent message, actions associated with the sending of that message according to 7.3 of ISO/IEC 11582 are deemed to occur.

Where an input symbol represents a primitive from the Coordination Function, and that primitive is the result of a message being received, the input signal bears the name of the message and any remote operations APDU(s) contained in that message. In the case of a message specified in ISO/IEC 11572, basic call actions associated with the receipt of that message are deemed to have occurred. In the case of a call independent message, actions associated with the receipt of that message according to 7.3 of ISO/IEC 11582 are deemed to have occurred.

The following abbreviations are used:

BC	Basic Call
conn	Connection
cfm	Confirmation
err	Return error APDU
ind	Indication
inv	Invoke APDU
res	Return result APDU
sig	Signalling

D.1 Behaviour of the Originating PINX

Figures D.1 through D.10 show the behaviour of the Originating PINX.

Input signals from the left and output signals to the left represent primitives

- from or to the served user (user A);
- from or to basic call control; these primitives are indicated by a prefix BC-;
- internal signal, e.g. timer expiry.

Input signals from the right and output signals to the right represent messages to the peer SS-Control entity (i.e. in the Terminating PINX) which carry SS-CC control information. Messages according to 7.3 of ISO/IEC 11582 (signalling connection) are indicated by 'sc'. Messages not marked 'sc' are call related.

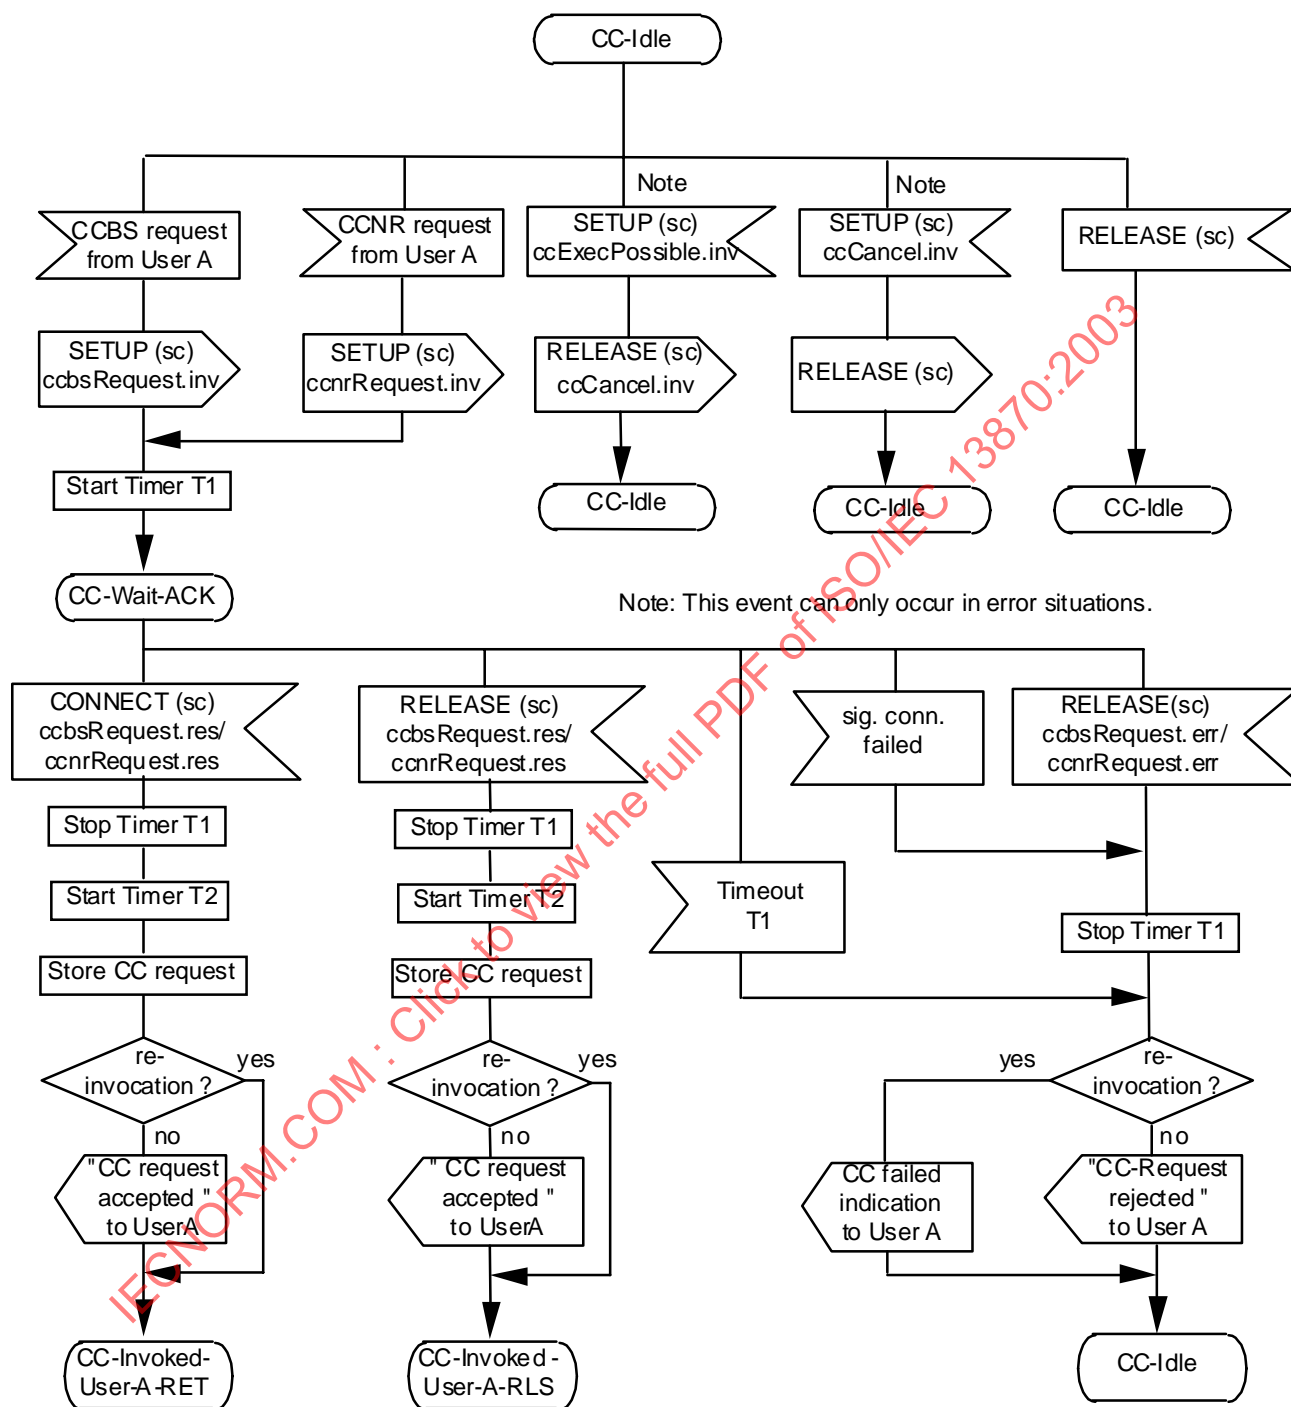


Figure D.1 - Originating PINX behaviour

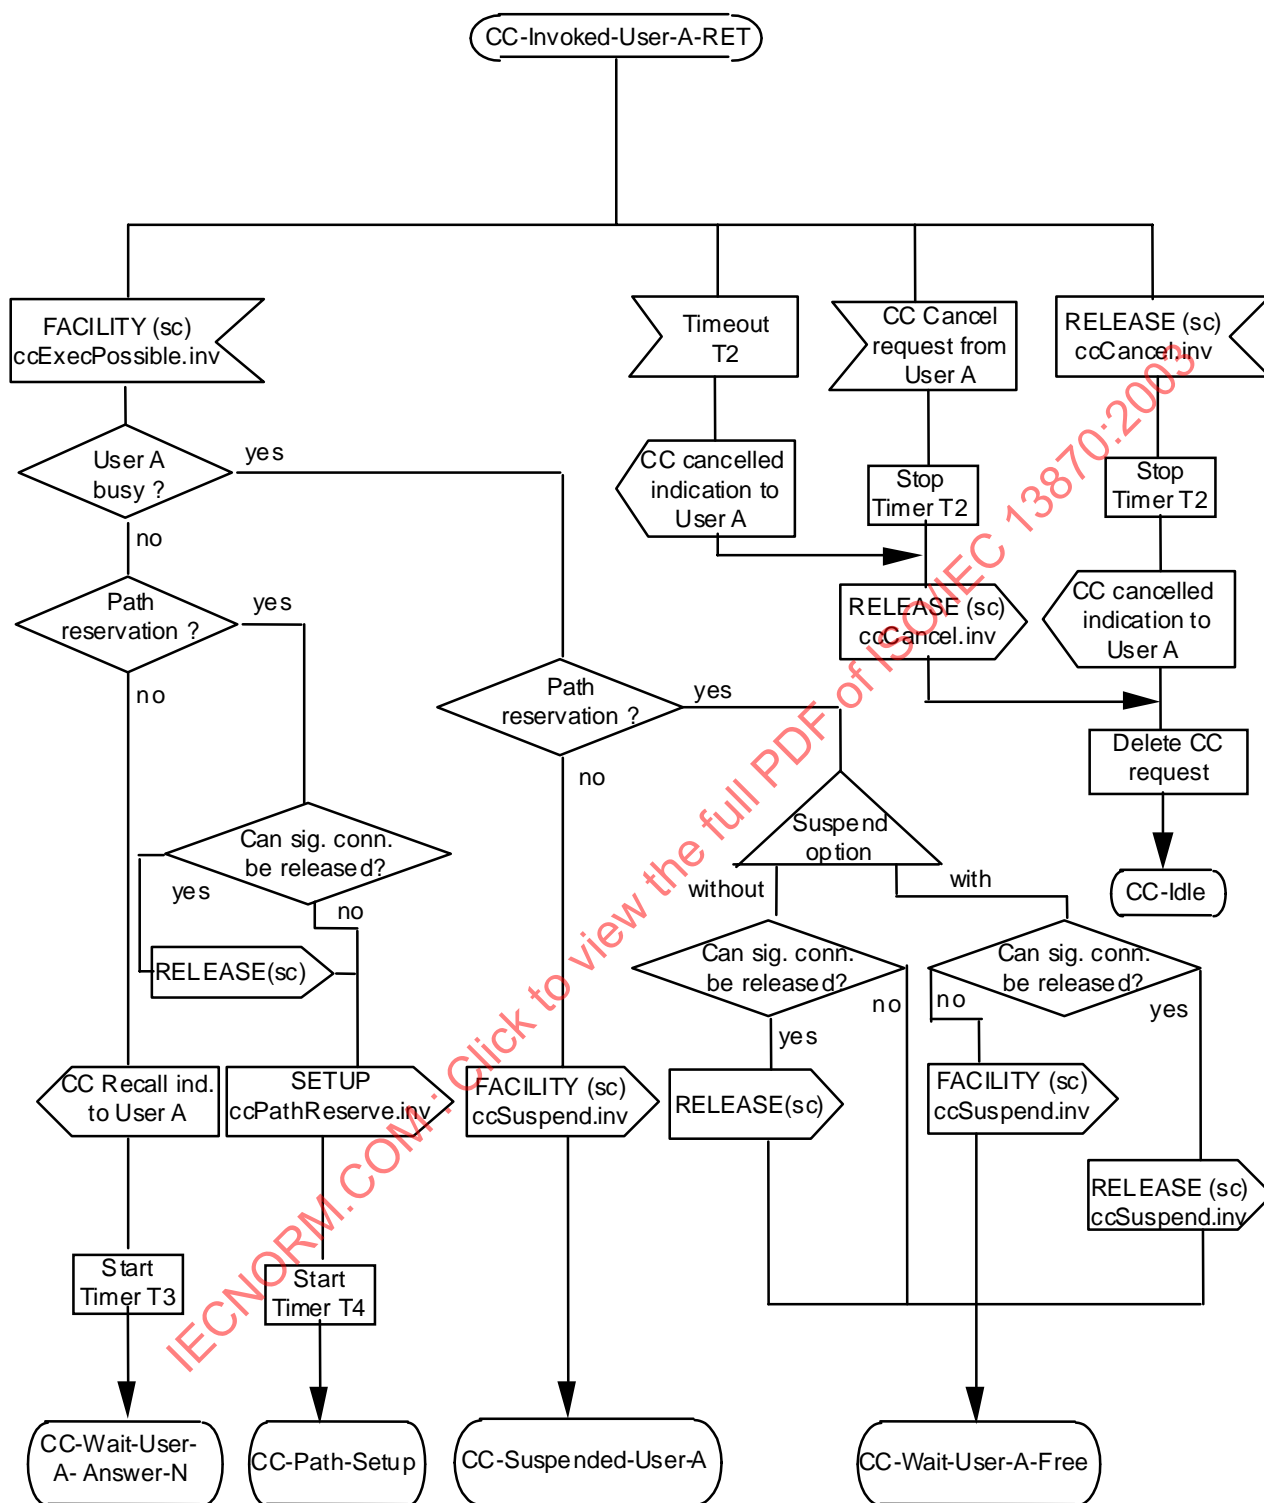


Figure D.2 - Originating PINX behaviour (continued)

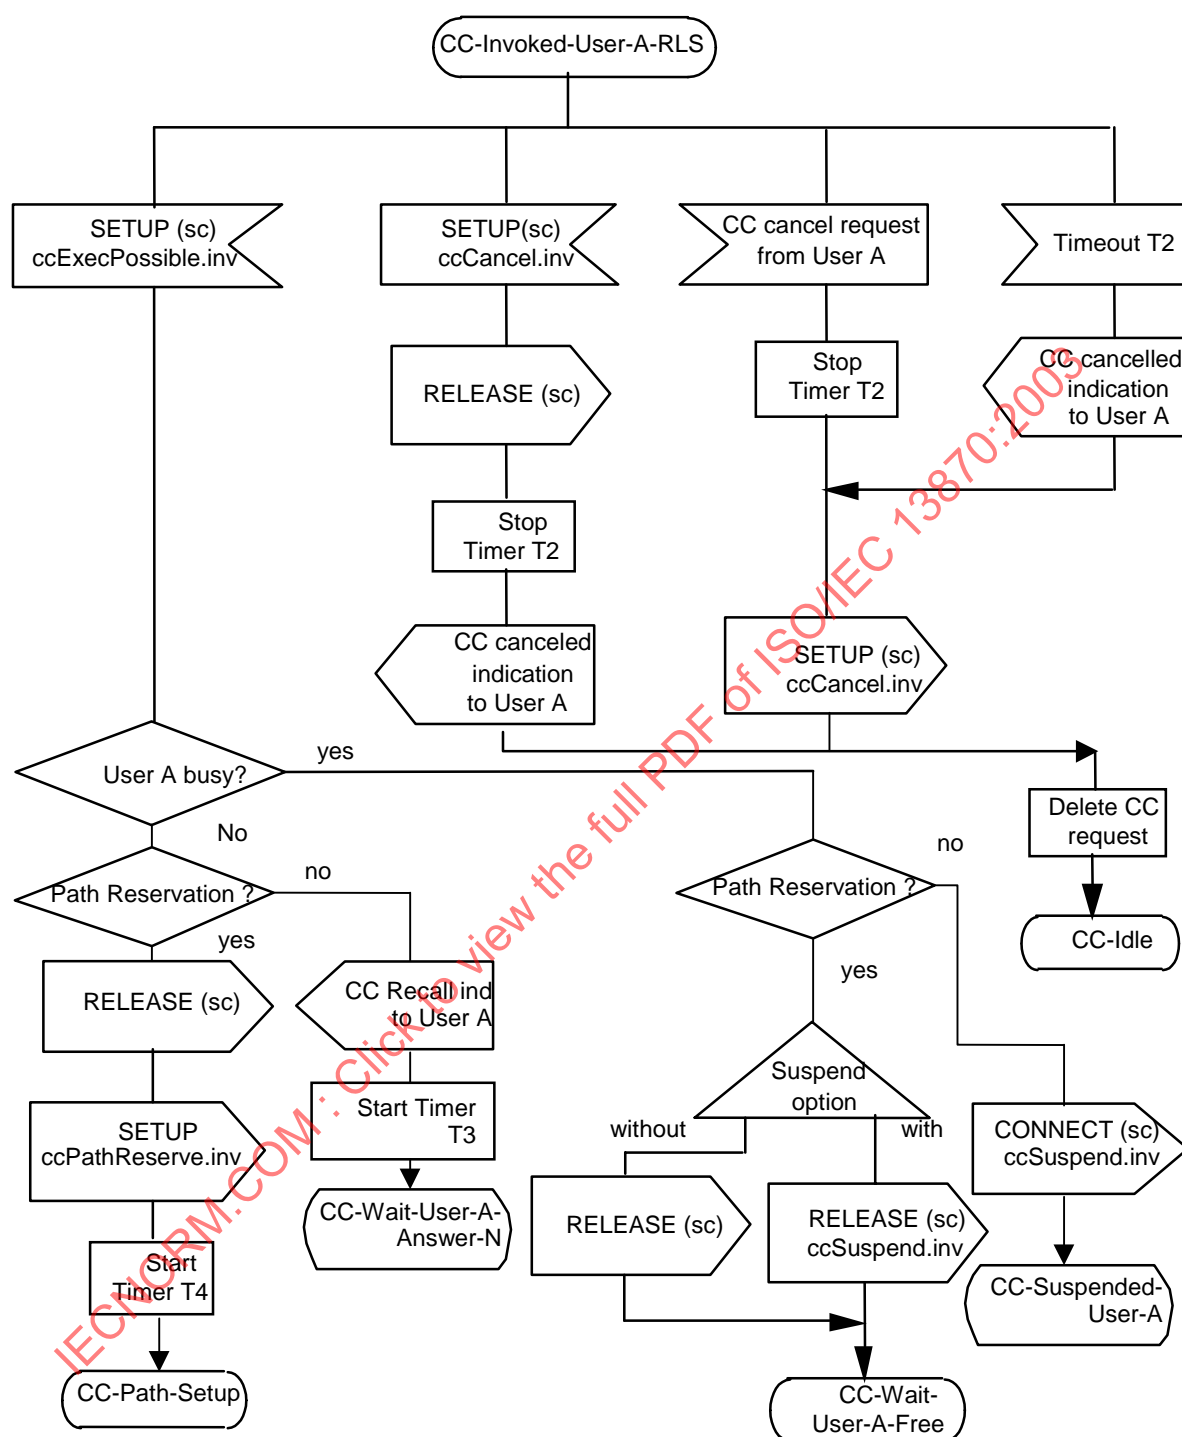


Figure D.3 - Originating PINX behaviour (continued)

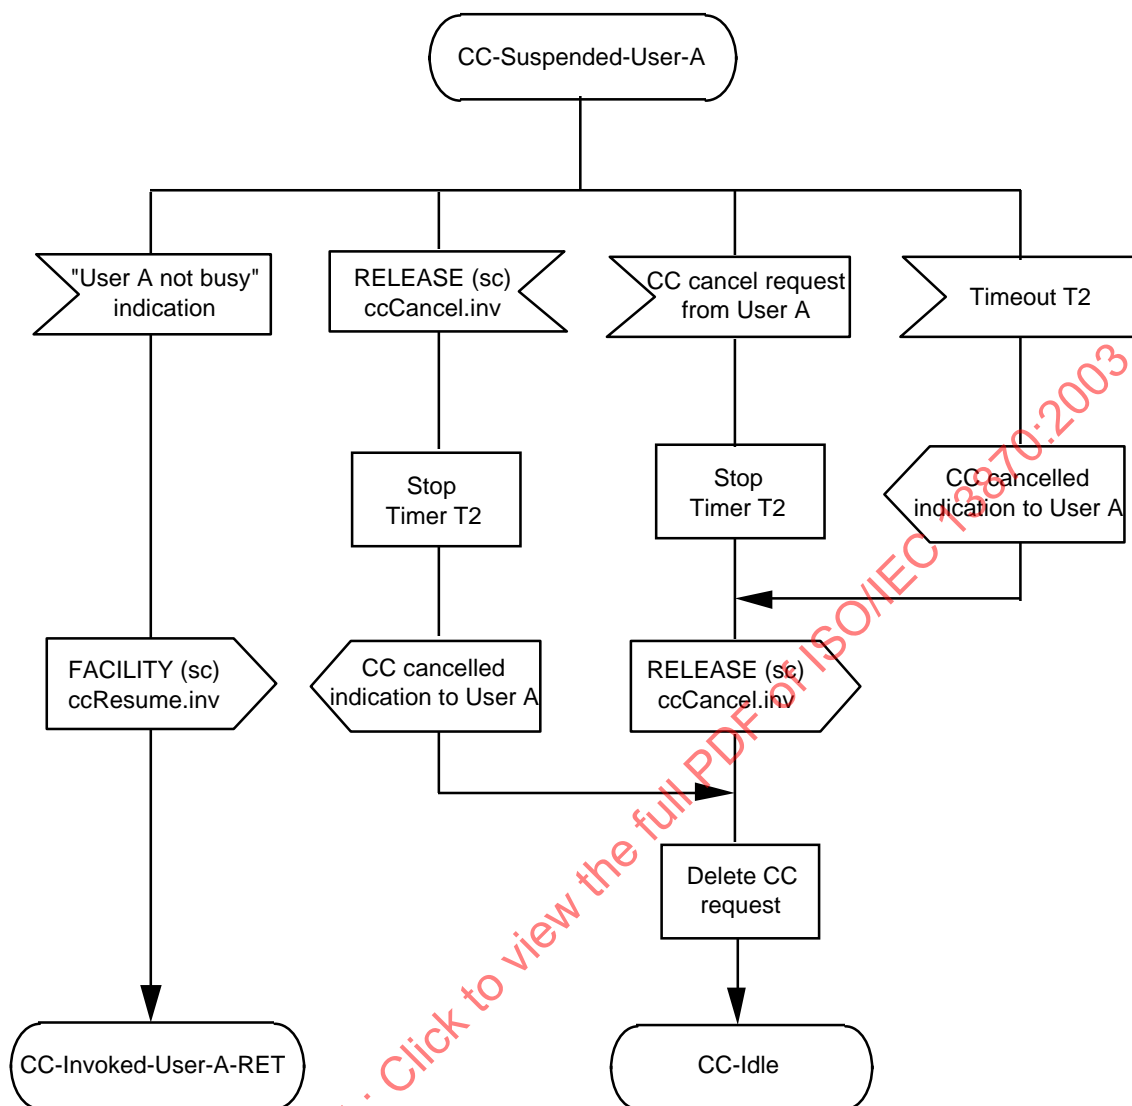


Figure D.4 - Originating PINX behaviour (continued)

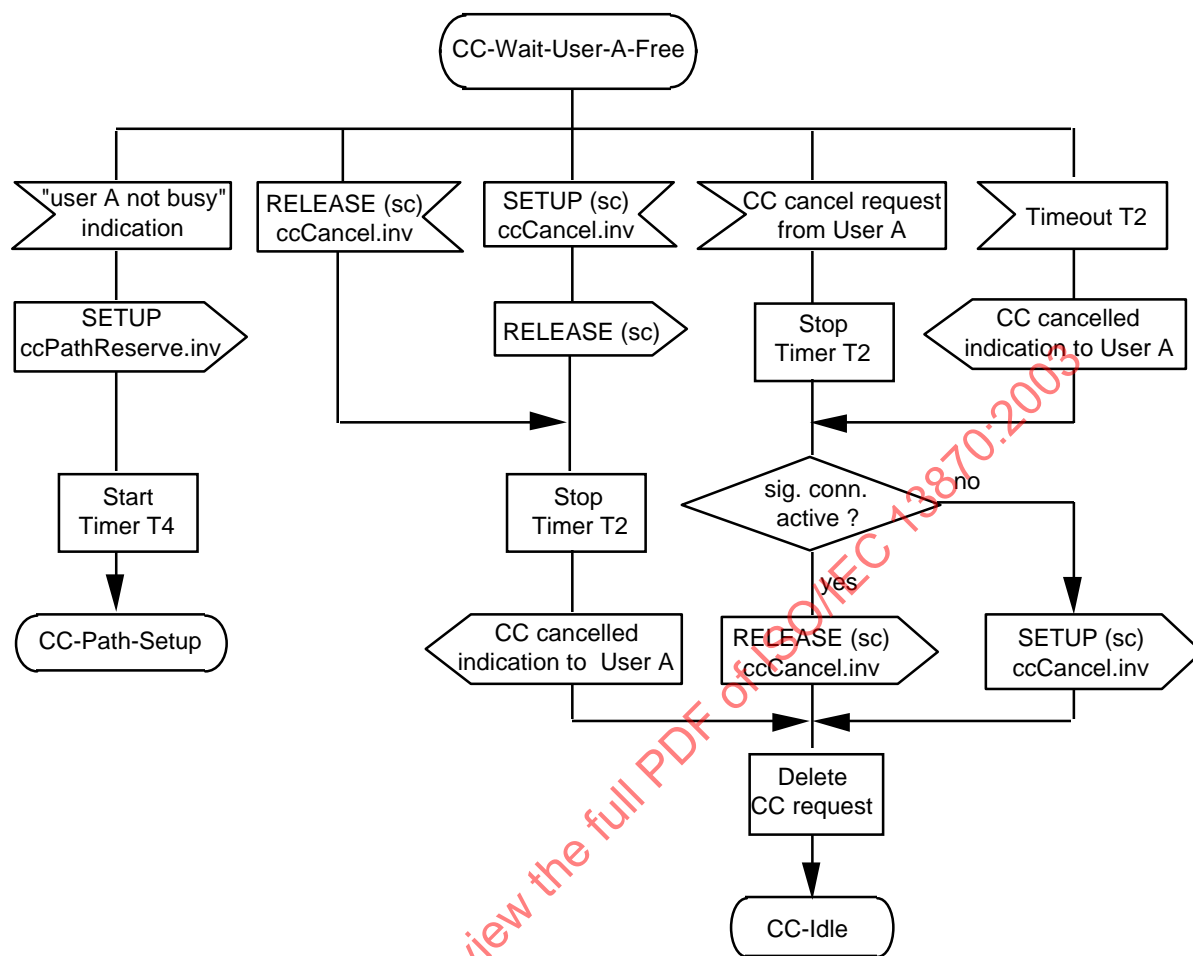


Figure D.5 - Originating PINX behaviour (continued)

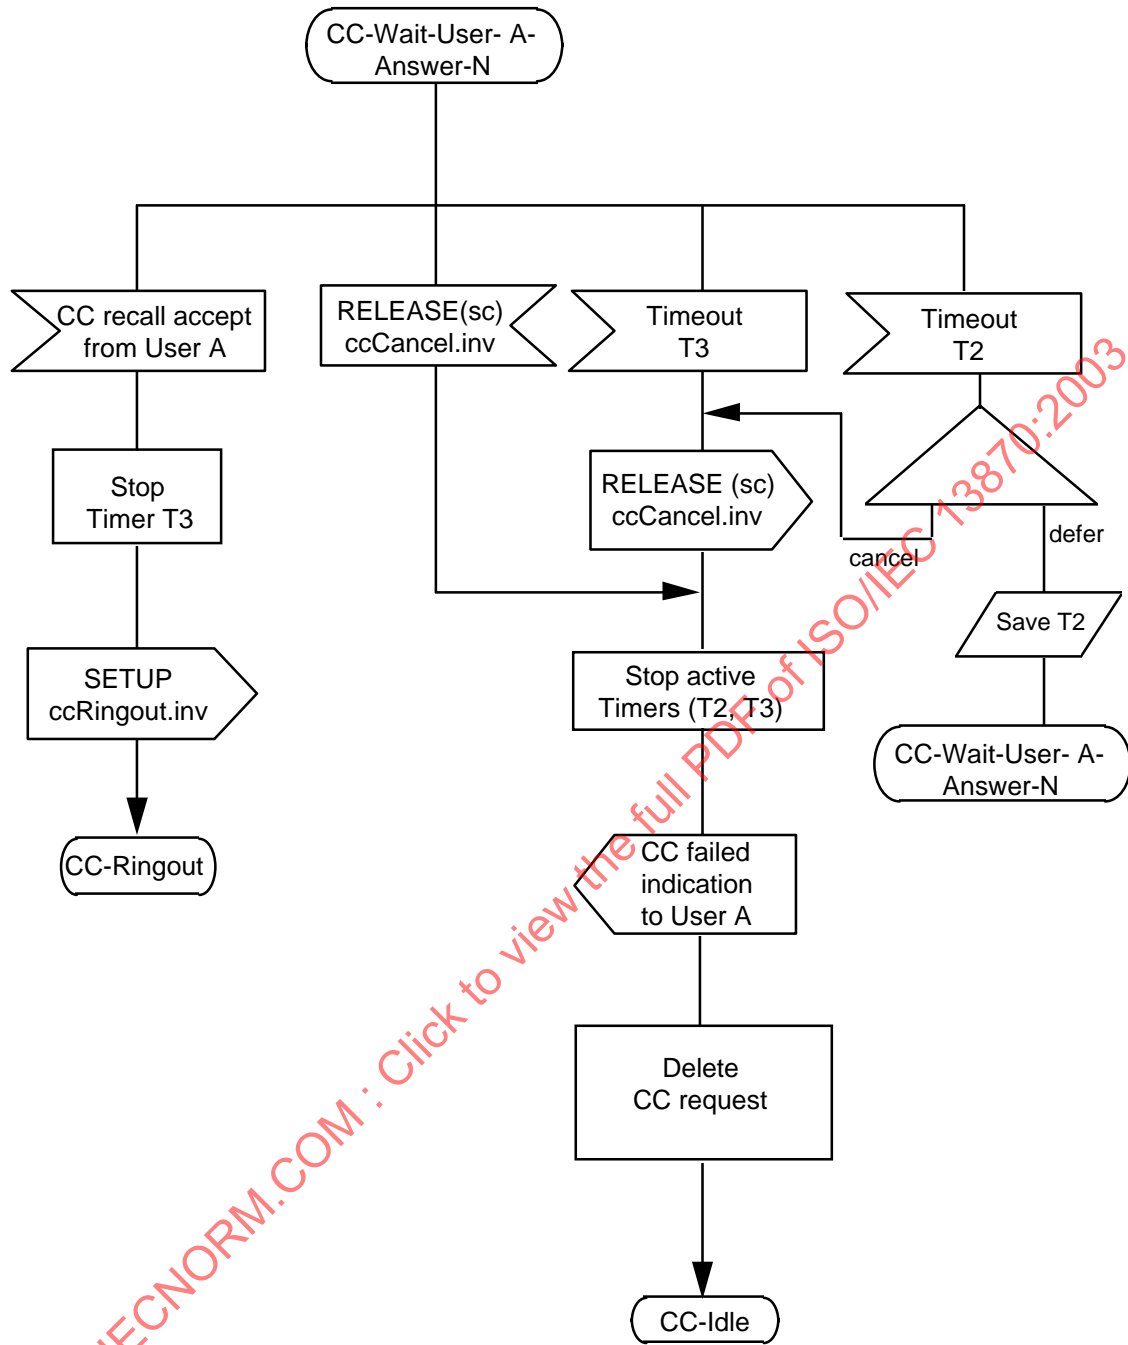


Figure D.6 - Originating PINX behaviour (continued)

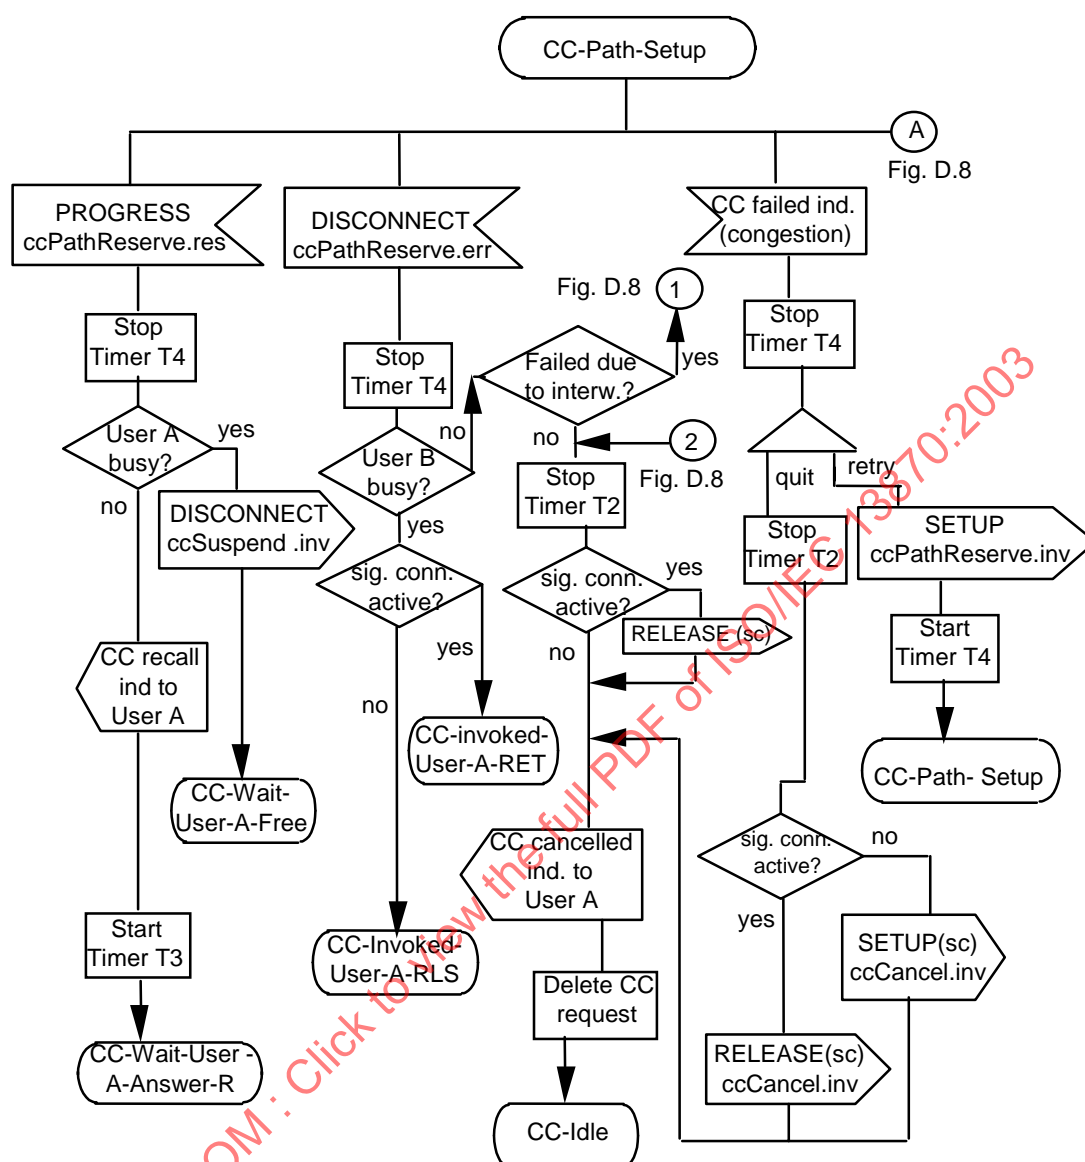


Figure D.7 - Originating PINX behaviour (continued)

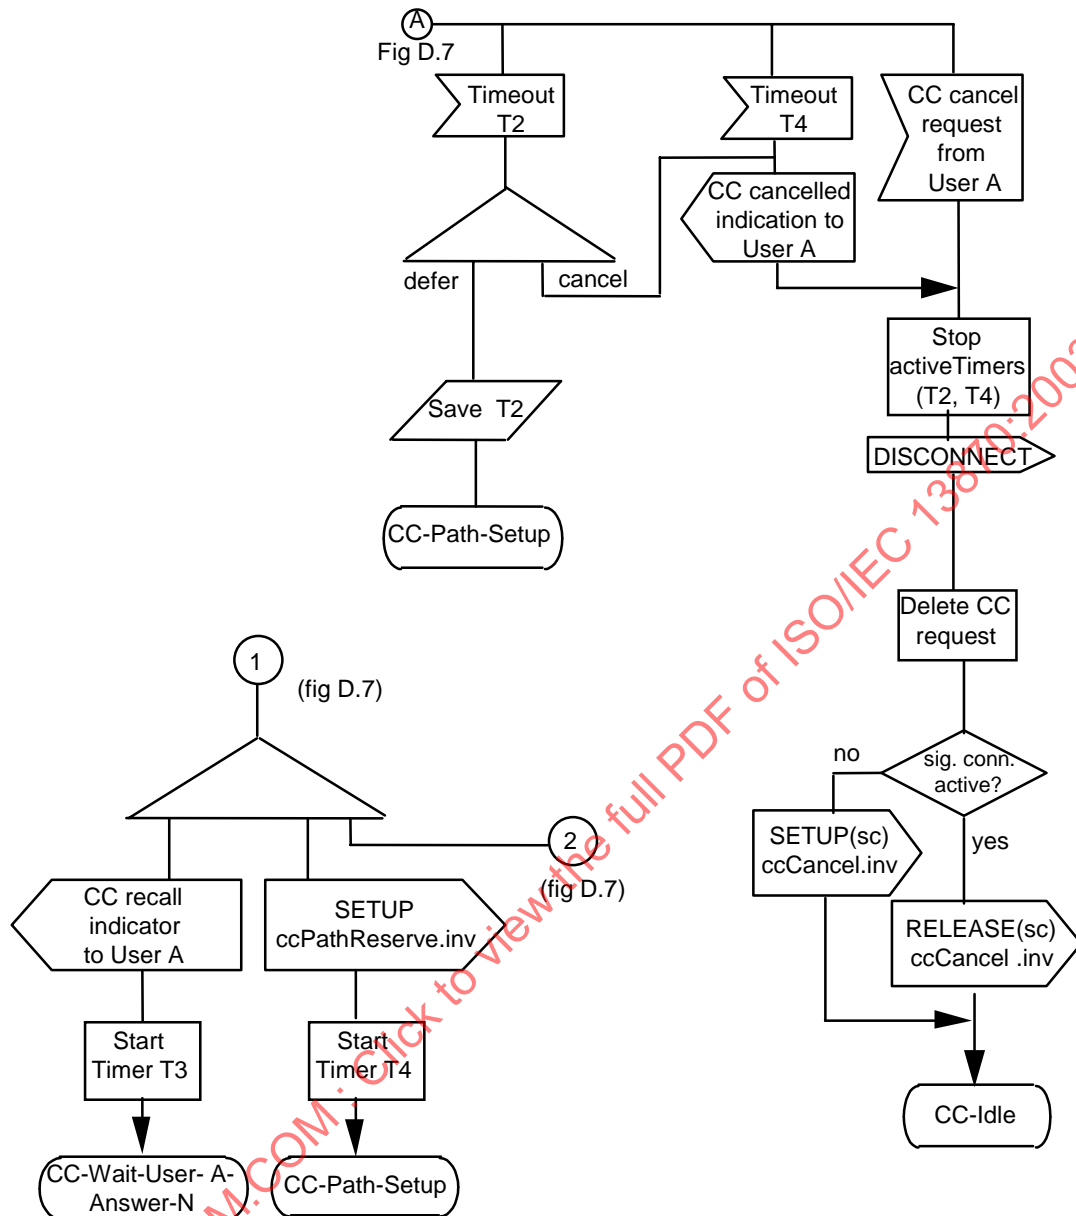


Figure D.8 - Originating PINX behaviour (continued)