

---

---

**Space systems — Estimation of orbit  
lifetime**

*Systèmes spatiaux — Estimation de la durée de vie en orbite*

STANDARDSISO.COM : Click to view the full PDF of ISO 27852:2011



STANDARDSISO.COM : Click to view the full PDF of ISO 27852:2011



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword .....	iv
Introduction .....	v
<b>1 Scope .....</b>	<b>1</b>
<b>2 Terms, definitions, symbols and abbreviated terms .....</b>	<b>1</b>
2.1 Terms and definitions .....	1
2.2 Symbols .....	4
2.3 Abbreviated terms .....	4
<b>3 Orbit lifetime estimation .....</b>	<b>4</b>
3.1 General requirements .....	4
3.2 Definition of orbit lifetime estimation process .....	5
<b>4 Orbit lifetime estimation methods and applicability .....</b>	<b>5</b>
4.1 General .....	5
4.2 Method 1 — High-precision numerical integration .....	6
4.3 Method 2 — Rapid semi-analytical orbit propagation .....	6
4.4 Methods 3 — Numerical table look-up, analysis and fit equation evaluations .....	7
4.5 Orbit lifetime sensitivity to sun-synchronous and high-eccentricity orbits .....	7
<b>5 Atmospheric density modelling .....</b>	<b>7</b>
5.1 General .....	7
5.2 Atmospheric drag models .....	7
5.3 Long-duration solar flux and geomagnetic indices prediction .....	9
5.4 Atmospheric density implications of thermospheric global cooling .....	14
<b>6 Estimating ballistic coefficient .....</b>	<b>14</b>
6.1 General .....	14
6.2 Estimating drag coefficient .....	15
6.3 Estimating cross-sectional area with tumbling and stabilization modes .....	15
6.4 Estimating mass .....	16
<b>Annex A (informative) Space population distribution .....</b>	<b>17</b>
<b>Annex B (informative) 25-Year lifetime predictions using random draw approach .....</b>	<b>20</b>
<b>Annex C (informative) Solar radiation pressure and 3rd-body perturbations .....</b>	<b>25</b>
<b>Bibliography .....</b>	<b>27</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 27852 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 14, *Space systems and operations*.

STANDARDSISO.COM : Click to view the full PDF of ISO 27852:2011

## Introduction

A spacecraft is exposed to the risk of collision with orbital debris and operational satellites throughout its launch, early orbit and mission phases. This risk is especially high during passage through or operations within the LEO region.

To address these concerns, the Inter-Agency Space Debris Coordination Committee (IADC) recommended to the United Nations<sup>[2]</sup> (section 5.3.2 “Objects Passing Through the LEO Region”): “Whenever possible space systems that are terminating their operational phases in orbits that pass through the LEO region, or have the potential to interfere with the LEO region, should be de-orbited (direct re-entry is preferred) or where appropriate manoeuvred into an orbit with a reduced lifetime. Retrieval is also a disposal option.” and “A space system should be left in an orbit in which, using an accepted nominal projection for solar activity, atmospheric drag will limit the orbital lifetime after completion of operations. A study on the effect of post-mission orbital lifetime limitation on collision rate and debris population growth has been performed by the IADC. This IADC and some other studies and a number of existing national guidelines have found 25 years to be a reasonable and appropriate lifetime limit.”

The Scientific and Technical Subcommittee (STSC) of the United Nations Committee on the Peaceful Uses of Outer Space (UNCOPUOS), acknowledging the benefits of the IADC guidelines, established the Working Group on Space Debris to develop a set of recommended guidelines<sup>[3]</sup> based on the technical content and the basic definitions of the IADC space debris mitigation guidelines, taking into consideration the United Nations treaties and principles on outer space. Consistent with the IADC recommendations (listed above), STSC Guideline 6 states that space mission planners, designers, manufacturers and operators should “Limit the long-term presence of spacecraft and launch vehicle orbital stages in the low-Earth orbit (LEO) region after the end of their mission.” STSC guidelines also state, “For more in-depth descriptions and recommendations pertaining to space debris mitigation measures, Member States and international organizations can refer to the latest version of the IADC space debris mitigation guidelines and other supporting documents, which can be found on the IADC website ([www.iadc-online.org](http://www.iadc-online.org)).”

The purpose of this International Standard is to provide a common, consensus approach to determining orbit lifetime, one that is sufficiently precise and easily implemented for the purpose of demonstrating compliance with IADC guidelines. This International Standard offers standardized guidance and analysis methods to estimate orbital lifetime for all LEO-crossing orbit classes.

This International Standard is a supporting document to ISO 24113<sup>[1]</sup> and the GEO and LEO disposal standards that are derived from ISO 24113.

STANDARDSISO.COM : Click to view the full PDF of ISO 27852:2017

# Space systems — Estimation of orbit lifetime

**IMPORTANT** — The electronic file of this document contains colours which are considered to be useful for the correct understanding of the document. Users should therefore consider printing this document using a colour printer.

## 1 Scope

This International Standard describes a process for the estimation of orbit lifetime for satellites, launch vehicles, upper stages and associated debris in LEO-crossing orbits.

It also clarifies the following:

- modelling approaches and resources for solar and geomagnetic activity modelling;
- resources for atmosphere model selection;
- approaches for satellite ballistic coefficient estimation.

## 2 Terms, definitions, symbols and abbreviated terms

### 2.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

#### 2.1.1

##### **orbit lifetime**

elapsed time between the orbiting satellite's initial or reference position and orbit demise/reentry

NOTE 1 An example of the orbiting satellite's reference position is the post-mission orbit.

NOTE 2 The orbit's decay is typically represented by the reduction in perigee and apogee altitudes (or radii) as shown in Figure 1.

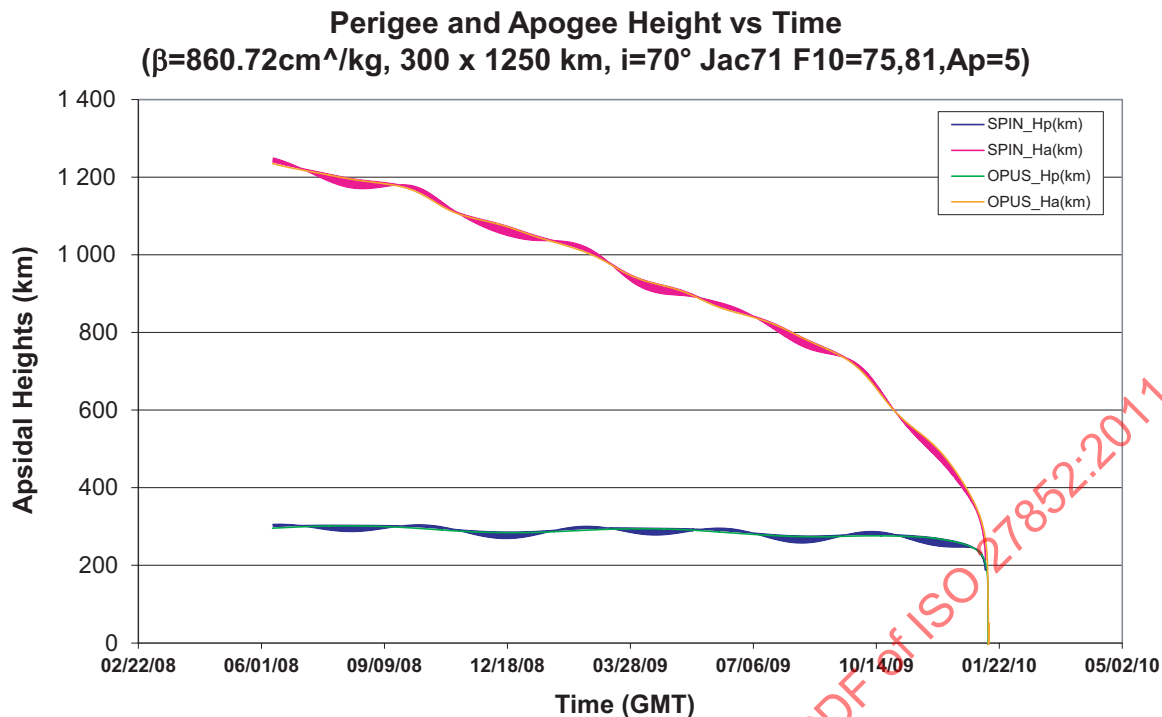


Figure 1 — Sample of orbit lifetime decay profile

**2.1.2****disposal phase**

interval during which a spacecraft or launch vehicle orbital stage completes its disposal actions

**2.1.3****earth equatorial radius**

equatorial radius of the Earth

NOTE The equatorial radius of the Earth is taken as 6 378,137 km and this radius is used as the reference for the Earth's surface from which the orbit regions are defined.

**2.1.4****LEO-crossing orbit**

low-earth orbit, defined as an orbit with perigee altitude of 2 000 km or less

NOTE As can be seen in Figure A.1, orbits having this definition encompass the majority of the high spatial density spike of satellites and space debris.

**2.1.5****long-duration orbit lifetime prediction**

orbit lifetime prediction spanning two solar cycles or more (e.g. 25-year orbit lifetime)

**2.1.6****mission phase**

phase where the space system fulfills its mission

NOTE Begins at the end of the launch phase and ends at the beginning of the disposal phase.

**2.1.7****post-mission orbit lifetime**

duration of the orbit after completion of the mission phase

NOTE The disposal phase duration is a component of post-mission duration.



**2.1.8****satellite**

system designed to perform specific tasks or functions in outer space

NOTE A spacecraft that can no longer fulfill its intended mission is considered as non-functional. Spacecraft in reserve or standby modes awaiting possible reactivation are considered functional.

**2.1.9****space debris**

all man-made objects, including fragments and elements thereof, in Earth orbit or re-entering the atmosphere, that are non-functional

**2.1.10****space object**

man-made object in outer space

**2.1.11****orbit**


path followed by a space object

**2.1.12****solar cycle**

≈11-year solar cycle based on the 13-month running mean for monthly sunspot number and is highly correlated with the 13-month running mean for monthly solar radio flux measurements at the 10,7 cm wavelength

NOTE 1 Historical records back to the earliest recorded data (1947) are shown in Figure 2.

NOTE 2 For reference, the current 25-year post-mission IADC orbit lifetime recommendation is overlaid onto the historical data; it can be seen that multiple solar cycles are encapsulated by this long time duration.

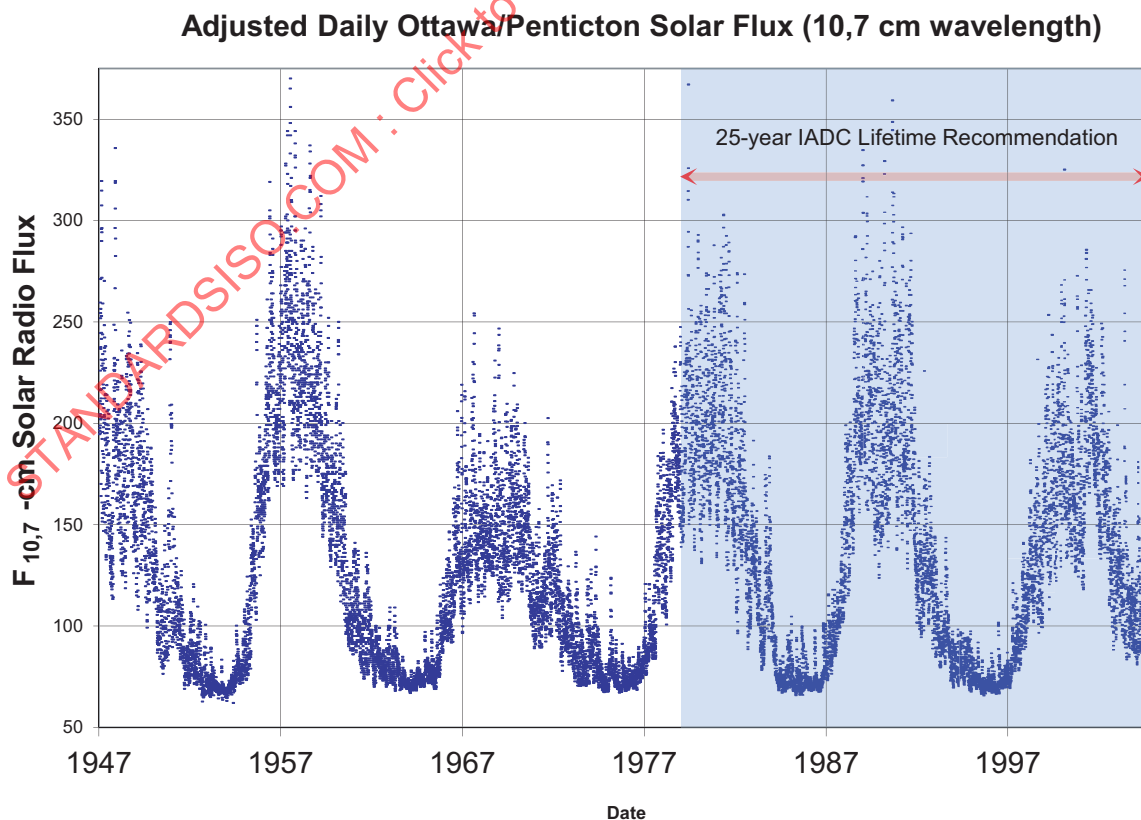

**Figure 2 — Solar cycle (≈11 year duration)**

## 2.2 Symbols

$a$	orbit semi-major axis
$A$	satellite cross-sectional area with respect to the relative wind
$A_p$	earth daily geomagnetic index
$\beta$	ballistic coefficient of satellite, equal to $C_D \times A/m$
$C_D$	satellite drag coefficient
$C_R$	satellite reflectivity coefficient
$e$	orbit eccentricity
$F_{10,7}$	solar radio flux observed daily at 2 800 MHz (10,7 cm) in solar flux units ( $10^{-22} \text{ W m}^{-2} \text{ Hz}^{-1}$ )
$\bar{F}_{10,7}$	solar radio flux at 2 800 MHz (10,7 cm), averaged over three solar rotations
$H_a$	apogee altitude, equal to $a(1 + e) - R_e$
$H_p$	perigee altitude, equal to $a(1 - e) - R_e$
$m$	mass of a satellite
$R_e$	equatorial radius of the earth

## 2.3 Abbreviated terms

GEO	geosynchronous earth orbit
GTO	geosynchronous transfer orbit
IADC	Inter-Agency Space Debris Coordination Committee
ISO	International Organization for Standardization
LEO	low-earth orbit
RAAN	orbit right ascension of the ascending node (the angle between the vernal equinox and the orbit ascending node, measured CCW in the equatorial plane, looking in the $-Z$ direction)
STSC	Scientific and Technical Subcommittee of the Committee
UNCOPUOS	United Nations Committee on the Peaceful Uses of Outer Space

## 3 Orbit lifetime estimation

### 3.1 General requirements

The orbital lifetime of LEO-crossing mission-related objects shall be estimated using the processes specified in this International Standard. In addition to any user-imposed constraints, the post-mission portion of the

resulting orbit lifetime estimate shall then be constrained to a maximum of 25 years as per IADC recommendations using a combination of the following:

- a) initial orbit selection;
- b) satellite vehicle design;
- c) spacecraft launch and early orbit concepts of operation which minimize LEO-crossing objects;
- d) satellite ballistic parameter modifications at EOL;
- e) satellite deorbit manoeuvres.

### 3.2 Definition of orbit lifetime estimation process

The orbit lifetime estimation process is represented generically in Figure 3.

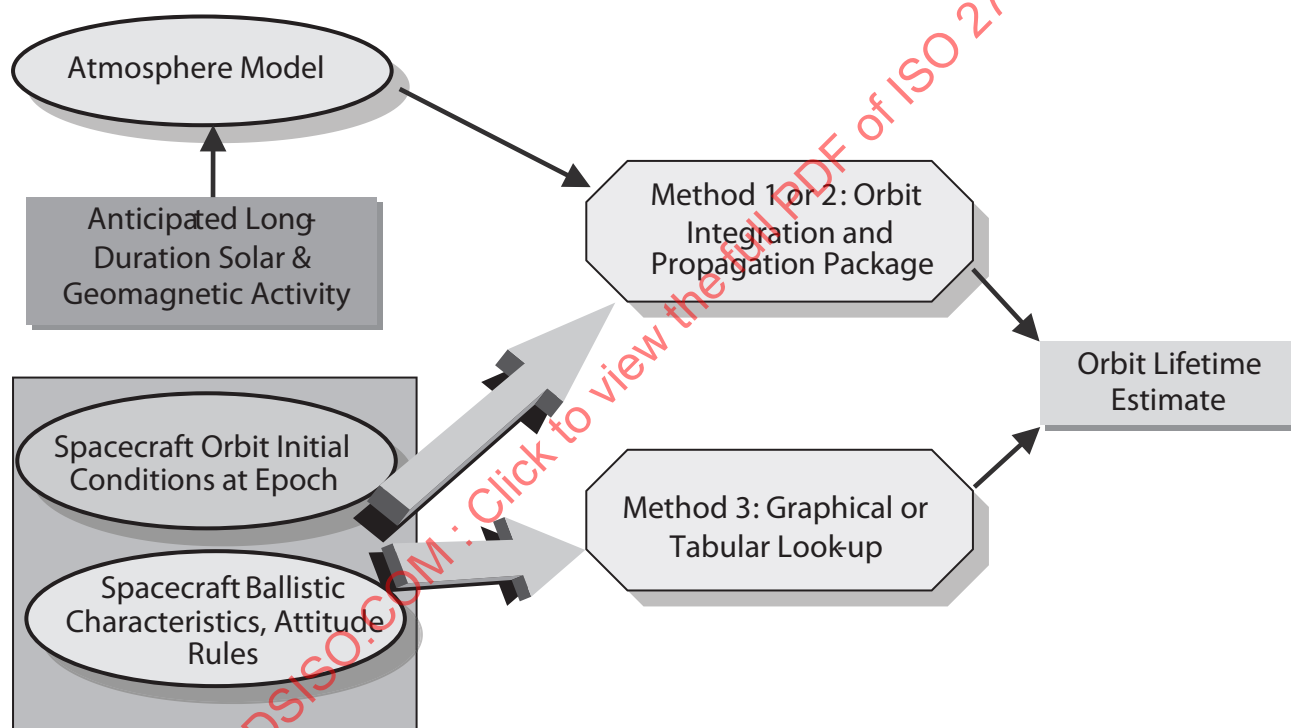


Figure 3 — Orbit lifetime estimation process<sup>[4]</sup>

## 4 Orbit lifetime estimation methods and applicability

### 4.1 General

There are three basic analysis methods used to estimate orbit lifetime<sup>[4]</sup>, as depicted in Figure 3. Determination of the method used to estimate orbital lifetime for a specific space object shall be based upon the orbit type and perturbations experienced by the satellite as shown in Table 1.

**Table 1 — Applicable method with mandated conservative margins of error and required perturbation modelling**

Orbit apogee altitude km	Special orbit:		Conservative margin applied to each method:			
	Sun-sync?	High area-to-mass?	Method 1: Numerical integration	Method 2: Semi-analytic	Method 3a: Table look-up	Method 3b: Graph, equation fit
Apogee < 2 000	No	No	No margin req'd	5 % margin	10 % margin	25 % margin
Apogee < 2 000	No	Yes	No margin; use SRP	5 % margin; use SRP	10 % margin IFF $C_r \approx 1,7$	N/A
Apogee < 2 000	Yes	No	No margin req'd	5 % margin	N/A	N/A
Apogee < 2 000	Yes	Yes	No margin req'd; use SRP	5 % margin; use SRP	N/A	N/A
Apogee > 2000	Either	Either	No margin req'd; use 3Bdy+SRP	5 % margin; use 3 Bdy + SRP	N/A	N/A
N/A = not applicable 3Bdy = third-body perturbations SRP = solar radiation pressure						

Method 1, certainly the highest fidelity model, utilizes a numerical integrator with a detailed gravity model, third-body effects, solar radiation pressure, and a detailed satellite ballistic coefficient model. Method 2 utilizes a definition of mean orbital elements<sup>[5],[6]</sup>, semi-analytic orbit theory and average satellite ballistic coefficient to permit a very rapid integration of the equations of motion, while still retaining reasonable accuracy. Methods 3a and 3b are simply a table lookup, graphical analysis or evaluation of equations fit to pre-computed orbit lifetime estimation data obtained via the extensive and repetitive application of Methods 1 and/or 2.

#### 4.2 Method 1 — High-precision numerical integration

Method 1 is the direct numerical integration of all accelerations in Cartesian space, with the ability to incorporate a detailed gravity model (e.g. using a larger spherical harmonics model to address resonance effects), third-body effects, solar radiation pressure, vehicle attitude rules or aero-torque-driven attitude torques, and a detailed satellite ballistic coefficient model based on the variation of the angle-of-attack with respect to the relative wind. Atmospheric rotation at the earth's rotational rate is also easily incorporated in this approach. The only negative aspects to such simulations are the following.

- They run much slower than Method 2.
- Many of the detailed data inputs required to make this method realize its full accuracy potential are simply unavailable.
- Any gains in orbit lifetime prediction accuracy are frequently overwhelmed by inherent inaccuracies of atmospheric modelling and associated inaccuracies of long-term solar activity predictions/estimates.

However, to analyse a few select cases where such detailed model inputs are known, this is undoubtedly the most accurate method. At a minimum, Method 1 orbit lifetime estimations shall account for  $J_2$  and  $J_3$  perturbations and drag using an accepted atmosphere model and an average ballistic coefficient. In the case of high apogee orbits (e.g. geosynchronous transfer orbits), sun and moon third-body perturbations shall also be modelled.

#### 4.3 Method 2 — Rapid semi-analytical orbit propagation

Method 2 analysis tools utilize semi-analytic propagation of mean orbit elements<sup>[5],[6]</sup> influenced by gravity zonals  $J_2$  and  $J_3$  and selected atmosphere models. The primary advantage of this approach over direct numerical integration of the equations of motion (Method 1) is that long-duration orbit lifetime cases can be

quickly analysed (e.g. 1 s versus 1 700 s CPU time for a 30 year orbit lifetime case). While incorporation of an attitude-dependent ballistic coefficient is possible for this method, an average ballistic coefficient is typically used. At a minimum, Method 2 orbit lifetime estimations shall account for  $J_2$  and  $J_3$  perturbations and drag using an accepted atmosphere model and an average ballistic coefficient. In the case of high-apogee orbits (e.g. GTO), sun and moon third-body perturbations shall also be modelled.

#### 4.4 Methods 3 — Numerical table look-up, analysis and fit equation evaluations

In these methods, one uses tables, graphs and equations representing data that was generated by exhaustively using Methods 1 and 2 (see 4.2 and 4.3). The graphs and equations provided in this International Standard can help the analyst crudely estimate orbit lifetime for their particular case of interest; the electronic access to tabular look-up provided via this International Standard<sup>1)</sup> permits the analyst to estimate orbit lifetime for their particular case of interest via interpolation of Method 1 or Method 2 gridded data; all such Methods 3 data in this paper were generated using Method 2 approaches. At a minimum, method 3 orbit lifetime products shall be derived from Method 1 or Method 2 analysis products meeting the requirements stated above. When using this method, the analyst shall impose at least a 10 % margin of error to account for table look-up interpolation errors. When using graphs and equations, the analyst shall impose a 25 % margin of error.

#### 4.5 Orbit lifetime sensitivity to sun-synchronous and high-eccentricity orbits

For sun-synchronous orbits, orbit lifetime has some sensitivity to the initial value of RAAN due to the density variations with the local sun angle. Results from numerous orbit lifetime estimations show that orbits with 6:00 am local time have longer lifetime than orbits with 12:00 noon local time by about 5,5 %<sup>[4]</sup>. This maximum difference (500 days) translates into a 5 % error, which can be corrected by knowing the local time of the orbit. As a result, Method 1 or Method 2 analyses of the actual sun-synchronous orbit condition shall be used when estimating the lifetime of sun-synchronous orbits.

For high-eccentricity orbits, it has been found difficult to iterate to lifetime threshold constraints due to the coupling in eccentricity between the third-body perturbations and the drag decay. Due to this convergence difficulty, only Method 1 or Method 2 analyses shall be used when determining initial conditions that achieve a specified lifetime threshold for such orbits.

### 5 Atmospheric density modelling

#### 5.1 General

The three biggest factors in orbit lifetime estimation are the following:

- a) selection of an appropriate atmosphere model to incorporate into the orbit acceleration formulation;
- b) selection of appropriate atmosphere model inputs;
- c) determination of a space object's ballistic coefficient.

These three aspects are discussed in 5.2 to 5.4 and Clause 6.

#### 5.2 Atmospheric drag models

There are a wide variety of atmosphere models available to the orbit analyst. The background, technical basis, utility and functionality of these atmosphere models are described in detail in References [7] to [16]. This International Standard does not presume to dictate which atmosphere model the analyst shall use. However, it is worth noting that in general, the heritage, expertise and especially the observational data that went into

1) See [www.CelesTrak.com](http://www.CelesTrak.com).


creating each atmosphere model play a key role in that model's ability to predict atmospheric density, which is, in turn, a key factor in estimating orbit lifetime. Many of the early atmosphere models were low fidelity and were created on the basis of only one, or perhaps even just a part of one, solar cycle's worth of data.

The advantage of some of these early models is that they typically run much faster than the latest high-fidelity models (Table 2), without a significant loss of accuracy. However, the use of atmosphere models that were designed to fit a select altitude range (e.g. the “exponential” atmosphere model depicted in Table 2) or models that do not accommodate solar activity variations should be avoided as they miss too much of the atmospheric density variations to be sufficiently accurate.


There are some early models (e.g. Jacchia 1971 shown in Figure 5) which accommodate solar activity variations and also run very fast; these models can work well for long-duration orbit lifetime studies where numerous cases are to be examined. Conversely, use of the more recent atmosphere models are encouraged because they have substantially more atmospheric drag data incorporated as the foundation of their underlying assumptions. A crude comparison of a sampling of atmosphere models for a single test case is shown in Figures 4 and 5, illustrating the range of temperatures and densities exhibited by the various models. Although this International Standard does not presume to direct which atmosphere model the analyst should use, the reader is encouraged to seek atmosphere model guidance from existing and upcoming ISO International Standards and CIRA Working Group (e.g. CIRA-2008) recommendations. Models worthy of consideration include, but are not limited to, the NRLMSISE-00<sup>[11]</sup>, JB2006<sup>[12]</sup>, JB2008<sup>[13]</sup>, GRAM-07<sup>[14]</sup>, DTM-2000<sup>[15]</sup> and GOST-2004<sup>[16]</sup> models.

**Table 2 — Comparison of normalized density evaluation run times**

Atmosphere model	0 < Altitude < 5 000 km	0 < Altitude < 1 000 km
Exponential	1,00	1,00
Atm1962	1,43	1,51
Atm1976	1,54	1,54
Jacchia1971	13,68	17,31
MSIS 2000	141,08	222,81
JB2006	683,85	584,47

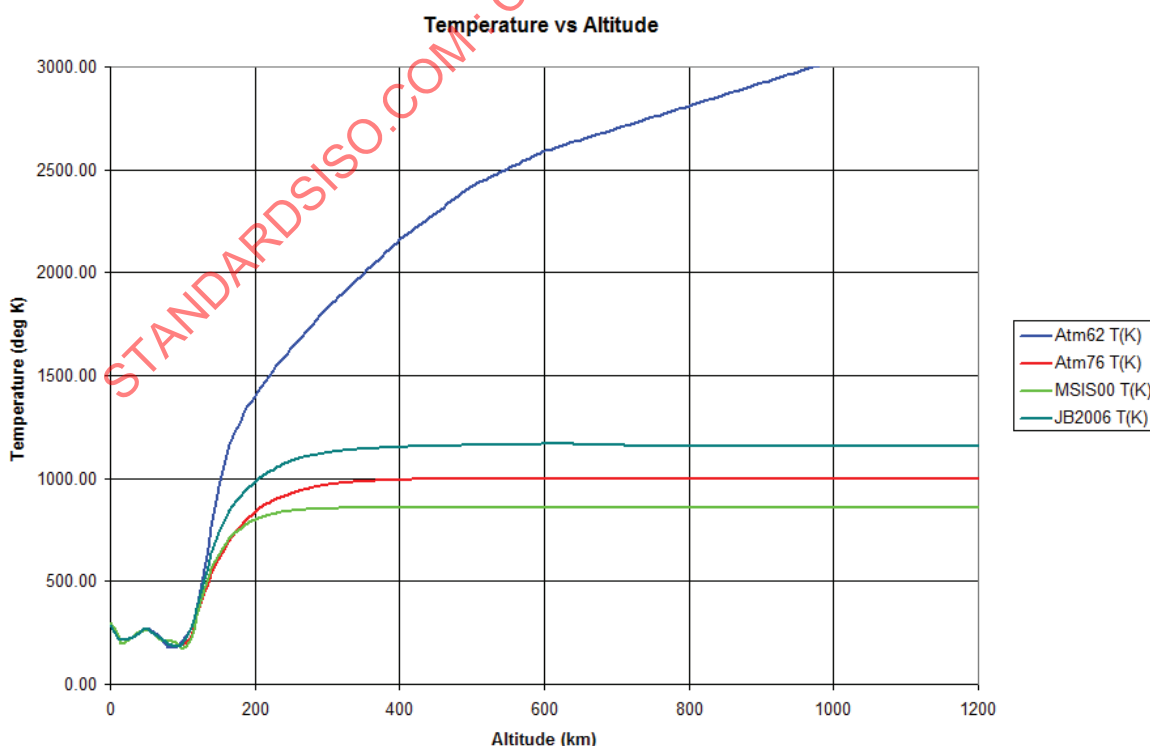

**Figure 4 — Temperature comparison by atmosphere model**

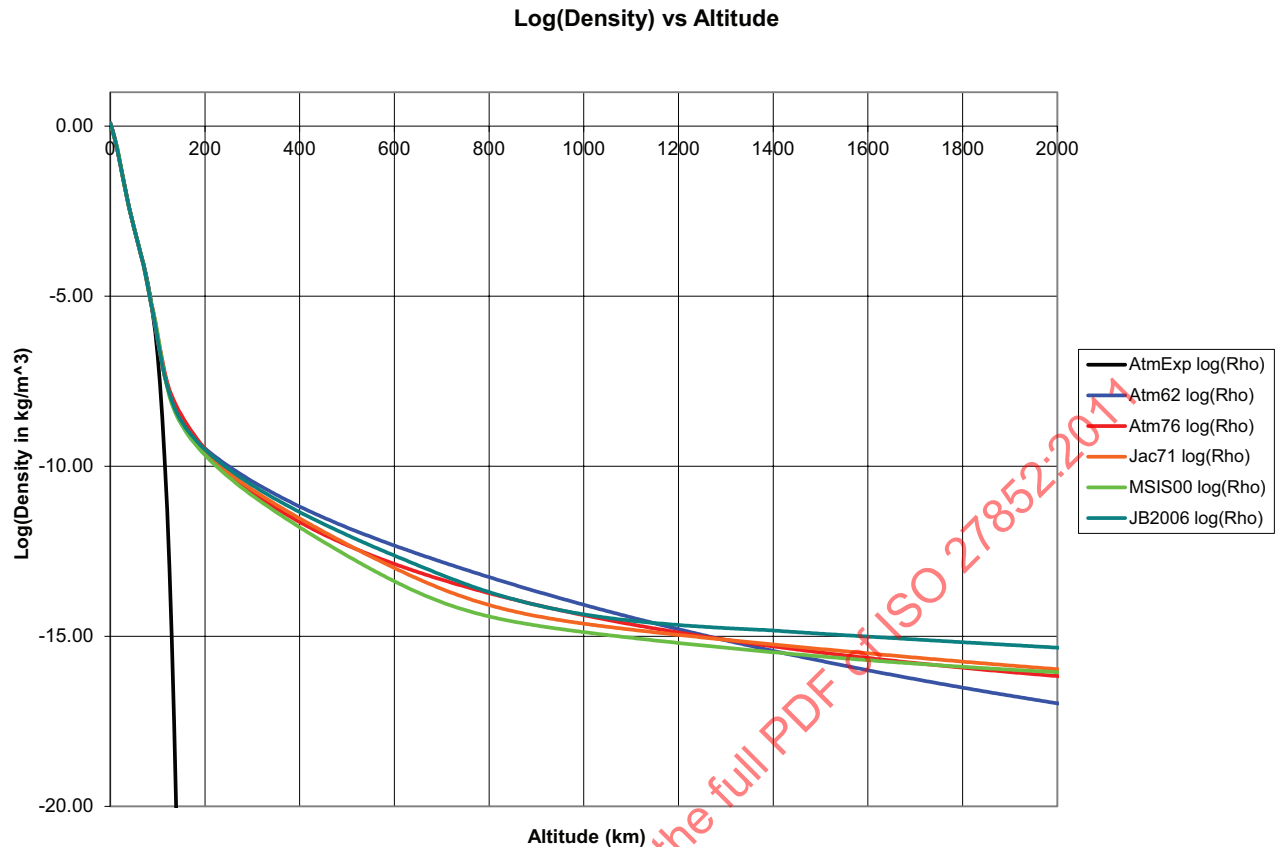

**Figure 5 — Comparison of a small sampling of atmosphere models**

### 5.3 Long-duration solar flux and geomagnetic indices prediction

Utilization of the higher-fidelity atmosphere models mentioned in 5.2 requires the orbit analyst to specify the solar and geomagnetic indices required by such models. Care shall be taken to obtain the proper indices required by each model; subtle differences can exist in the interpretation of similarly named indices when used by different atmosphere models (e.g. centrally-averaged vs. backward-averaged  $\bar{F}_{10,7}$ ).

Key issues associated with any prediction of solar and geomagnetic index modelling approach are the following.

- a)  $\bar{F}_{10,7}$  predictions should reflect the mean solar cycle as accurately as possible.
- b) Large daily  $F_{10,7}$  and  $A_p$  index variations about the mean value induce non-linear variations in atmospheric density, and the selected prediction approach should account for this fact; i.e. one should account for the highly non-linear aspects of solar storms versus quiet periods.
- c) The frequency of occurrence across the day-to-day index values is highest near the lowest prediction boundary (see Figure 7).
- d)  $F_{10,7}$  cycle timing/phase are always imprecise and should be accounted for; the resultant time bias that such a prediction error would introduce can yield large  $F_{10,7}$  prediction errors of 100 % or more.
- e) Although still under review, the long-time duration currently being advocated by the IADC (i.e., 25 years) would require that the solar/geomagnetic modelling approach provide at least that many years (i.e. 25) of predictive capability.



- f) Predicted  $F_{10,7}$  values should be adjusted to correct for earth-sun distance variations.
- g) Some atmosphere models (e.g. JB2006 and JB2008), due to the newly invented indices adopted thereby, preclude the use of historical indices for long-term orbit lifetime studies, while currently also precluding use of any predictive forecasting model(s) for those indices until such time as those become publicly available.

Accounting for these constraints, the user shall adopt one of the two approaches:

- Approach 1: Utilize Monte Carlo sampling of historical data<sup>[17][18]</sup> mapped to a common solar cycle period;
- Approach 2: Utilize a predicted  $\bar{F}_{10,7}$  solar activity profile generated by a model such as is detailed<sup>[19]</sup> in Figure 6, coupled with a stochastic or similar generation of corresponding  $F_{10,7}$  and  $A_p$  values, e.g. Reference [20].

Since Approach 2 is a well-known and common approach, the focus of the remainder of this subclause is devoted to the Monte Carlo “Random Draw” approach<sup>[4]</sup>. Be aware (see Figure 2) that there are already more than five solar cycles of observed solar and geomagnetic data to choose from. Processing of this data maps each coupled and correlated triad of datum ( $F_{10,7}$ ,  $\bar{F}_{10,7}$ , and  $A_p$ ) into a single solar cycle range of 10,825 46 years (3 954 days), with the “averaged” solar minimum referenced to 25 February 2007.

By mapping this historical data into a single solar cycle (see Figures 8 through 10), the user can then sample coupled triads of ( $F_{10,7}$ ,  $\bar{F}_{10,7}$ , and  $A_p$ ) data corresponding to the orbit lifetime simulation day within the mapped single solar cycle. This solar/geomagnetic data can then be updated at a user-selectable frequency (e.g. once per orbit or day), thereby simulating the drag effect resulting from solar and geomagnetic variations consistent with historical trends for these data. Since we have accumulated daily data since 14 February, 1947, on any given day within the 3 954 day solar cycle, there are at least five data triads to choose from. It is important that the random draw retain the integrity of each data triad, since  $F_{10,7}$ ,  $\bar{F}_{10,7}$  and  $A_p$  are interrelated.

In summary, the selected method used for modelling solar and geomagnetic data is to select a new coupled triad of ( $F_{10,7}$ ,  $\bar{F}_{10,7}$ , and  $A_p$ ) data for each day (or alternately for each orbit rev) of the orbit lifetime simulation, thereby simulating the drag effect resulting from solar and geomagnetic variations consistent with historical trends for these data. The atmospheric density estimated from atmospheric models utilizing a given ( $F_{10,7}$ ,  $\bar{F}_{10,7}$ , and  $A_p$ ) triad can then be directly utilized by either Method 1 (numerical integration) or Method 2 (semi-analytic) approaches. Due to the introduced step-function change in atmospheric density, it can be beneficial to restart Method 1 integration at each parameter set change; for semi-analytic (e.g. with orbital revolution time steps via Gaussian quadrature), a new parameter set can be drawn at an orbit revolution time step; thus, no numerical difficulties are introduced. The C++ code used to implement this atmospheric variation strategy is publicly available<sup>1)</sup> so that users of this International Standard for orbit lifetimes can adopt this standardized ( $F_{10,7}$ ,  $\bar{F}_{10,7}$  and  $A_p$ ) implementation of Approach 1 if desired.



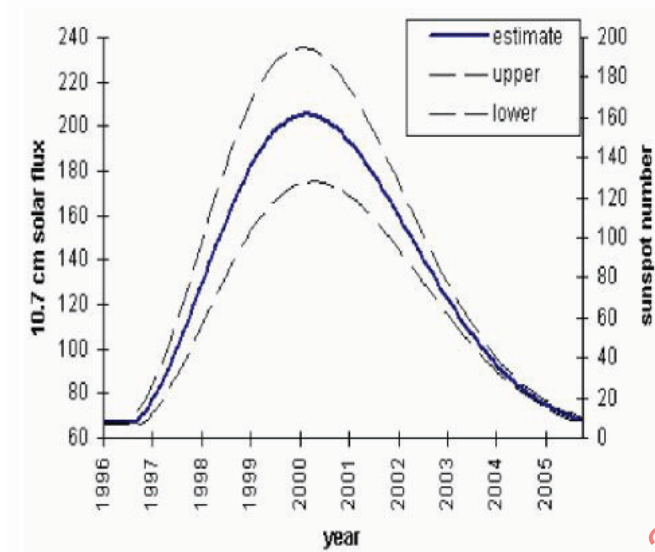


Figure 6 — Solar flux estimated upper, lower and representative trends



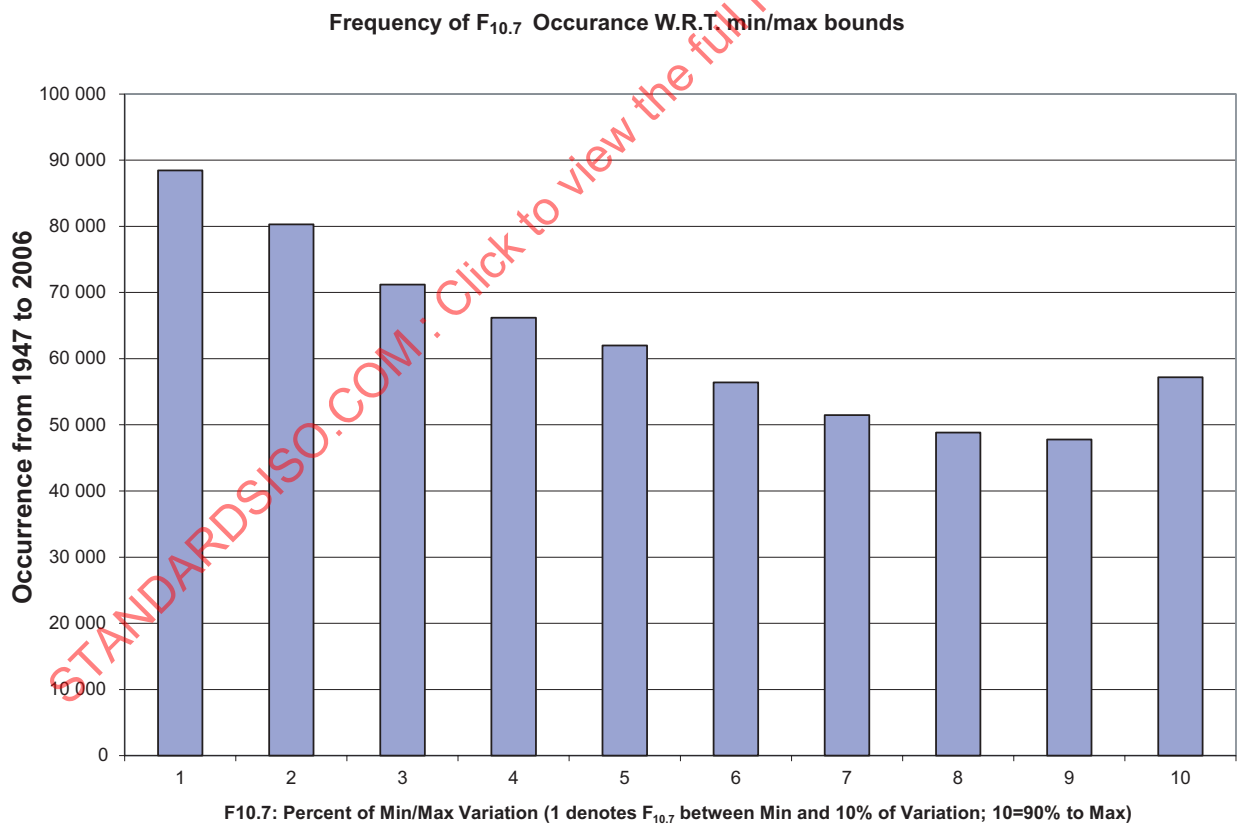



Figure 7 — Solar flux distribution as a percentage of localized min/max variation

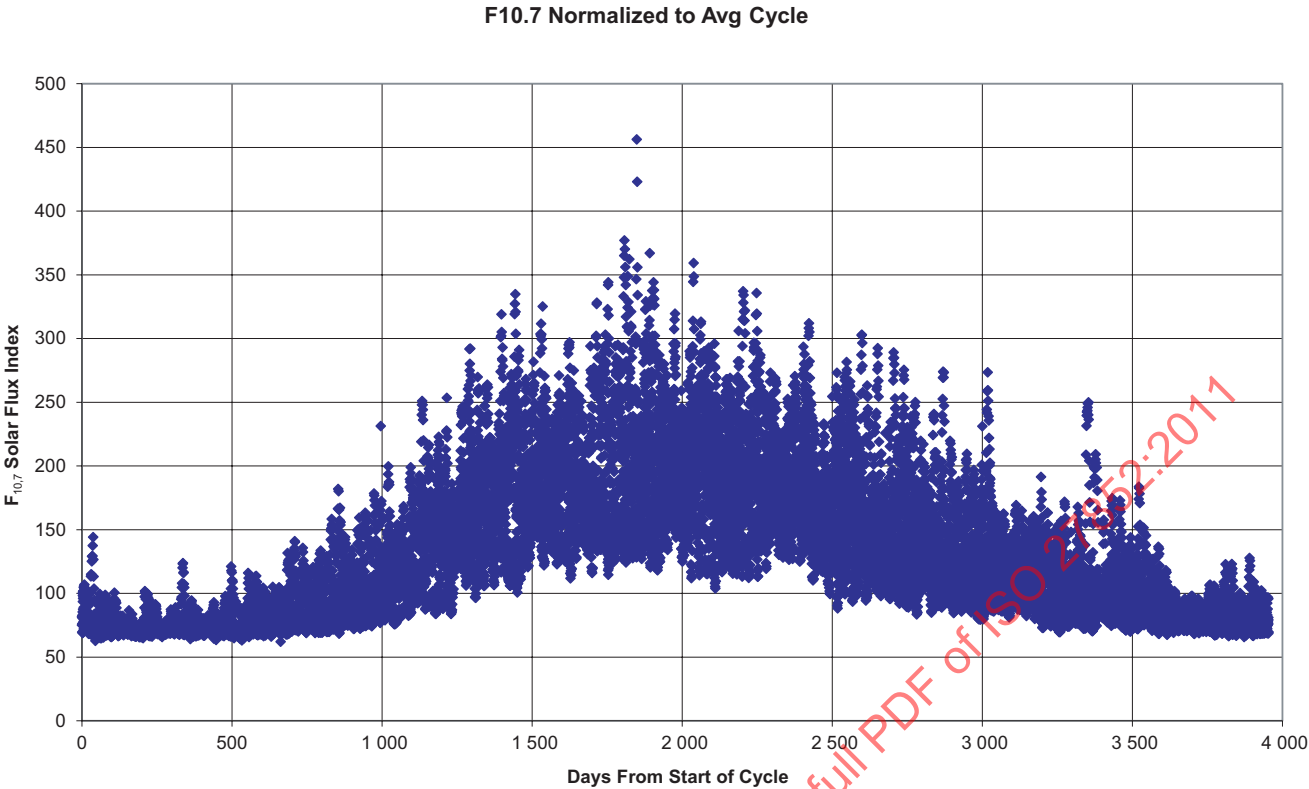

**Figure 8 —  $F_{10,7}$  normalized to average solar cycle**

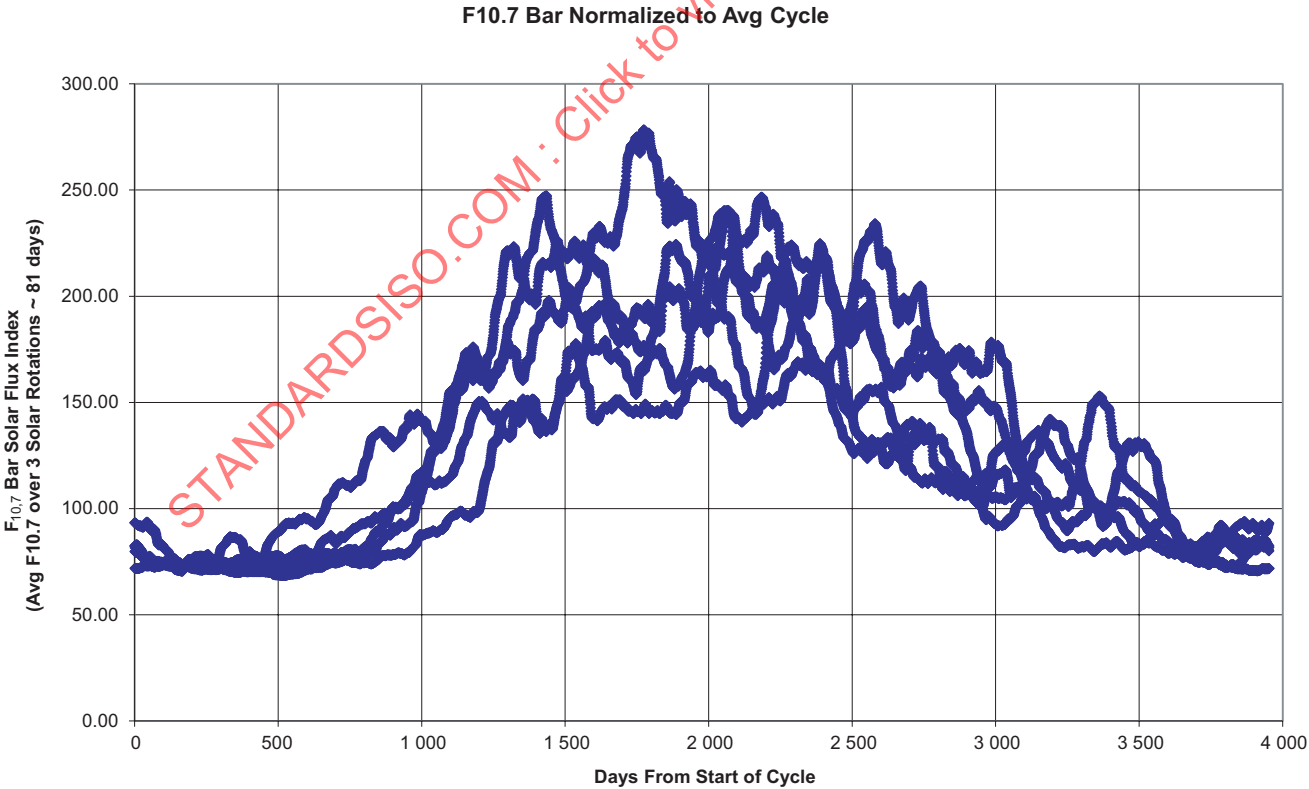

**Figure 9 —  $\bar{F}_{10,7}$  normalized to average cycle**

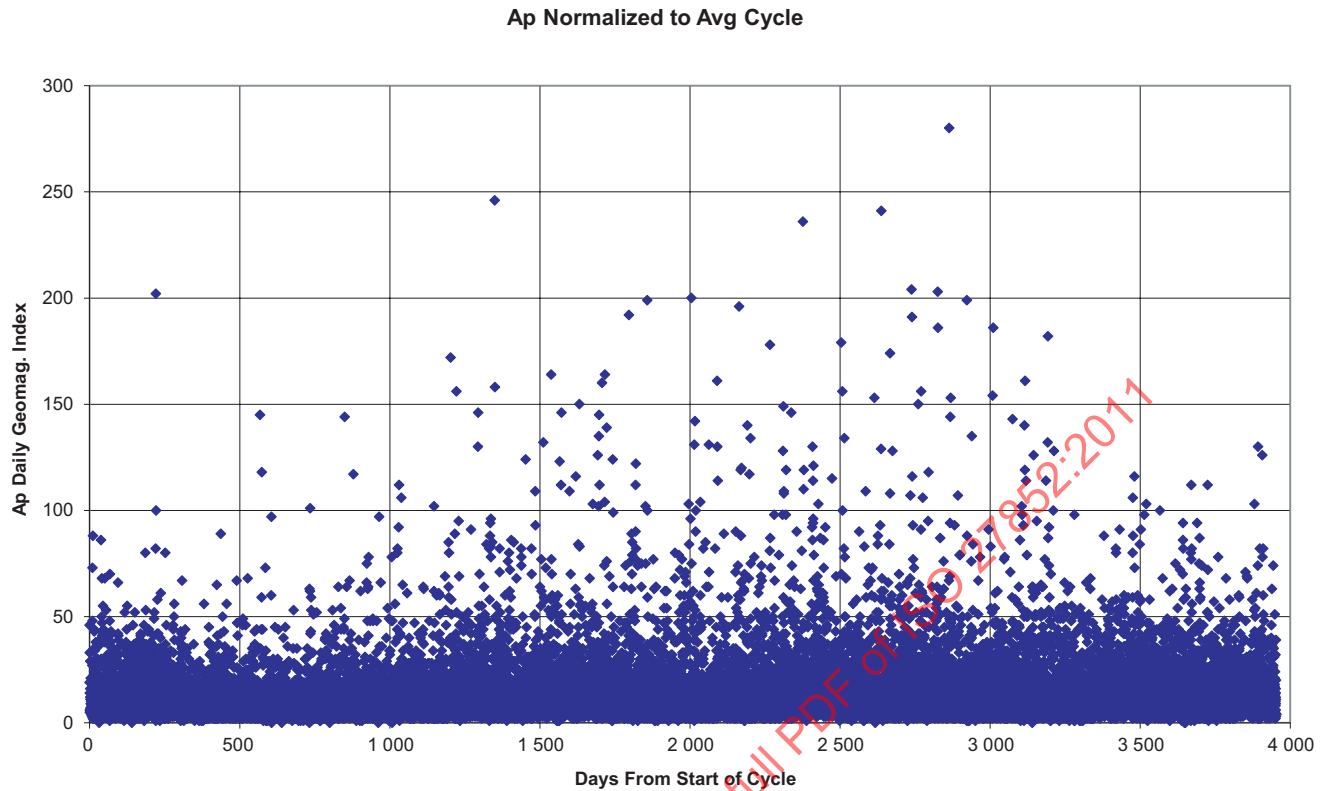

**Figure 10 —  $A_p$  normalized to average cycle**

It can be seen from Figure 10 that  $A_p$  is

- unpredictable;
- loosely correlated with the solar cycle;
- volatile.

Figure 11 demonstrates that density varies greatly (i.e. several orders of magnitude) depending on  $A_p$ ; thus, a geomagnetic storm can induce large decreases in orbital energy (orbit decay) that the use of some average  $A_p$  value would miss. Correspondingly, the analyst should incorporate  $A_p$  variations into the geomagnetic index predictions.

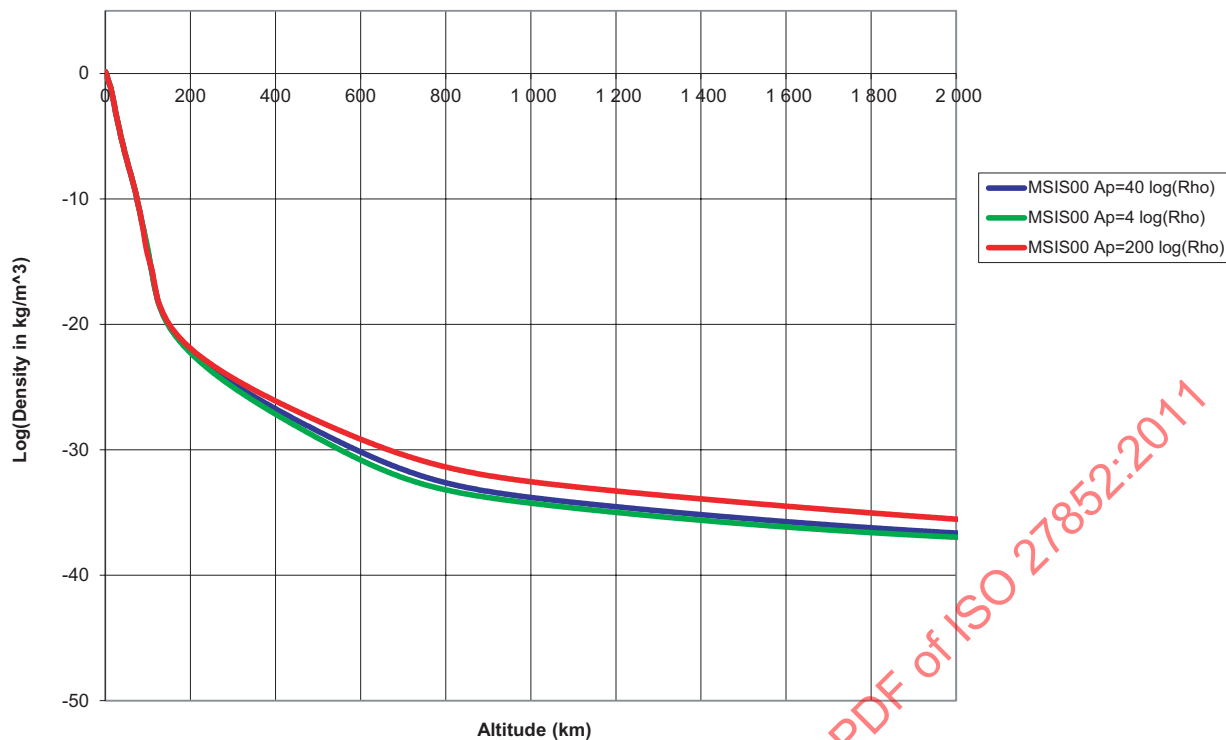


Figure 11 — Log(density) variation as a function of  $A_p$  value

#### 5.4 Atmospheric density implications of thermospheric global cooling

Recent indications of global cooling in the thermosphere can have a gradually increasing role in orbit lifetime estimation. The thermosphere is defined to occur roughly between 80 km and 500 km altitude, which is a key part of the LEO regime for which the ISO standard is being developed. Both satellite measurements<sup>[15]</sup> and theoretical models<sup>[16][17]</sup> indicate that the thermosphere is cooling off, causing density to lower. The mechanism causing this change appears to be that as CO<sub>2</sub> concentrations have increased [from  $3,2 \times 10^{-4}$  % by volume in 1965 to around  $3,8 \times 10^{-4}$  % by volume in 2005<sup>2)</sup>] at altitudes below 30 km, and the upper atmosphere is correspondingly cooling down. It is estimated that because of this effect, atmospheric density will decrease by between 1,7 %<sup>[21]</sup> and 2 %<sup>[22][23]</sup> per decade. This decrease yields a corresponding increase in orbit lifetime of between 4 % and 7 %<sup>[1]</sup>.

## 6 Estimating ballistic coefficient

### 6.1 General

The first step in planning a LEO-crossing space object disposal is to estimate the ballistic coefficient,  $\beta$ , as given by Equation (1):

$$\beta = \frac{C_D A}{m} \quad (1)$$

2) Equal to 320 ppmv and 380 ppmv, respectively.

where

$C_D$  is the coefficient of drag;

$A$  is the object cross-sectional area;

$m$  is the object mass.

Accurate estimation of the space object's ballistic coefficient is another key element in the orbit lifetime analysis process. Frequently, the analyst selects an average ballistic coefficient for the duration of the prediction, but this is not always the case. The cross-sectional area and drag coefficient estimations are considered separately. Spacecraft mass shall be varied according to best-available knowledge, but may typically be assumed to be constant from end-of-life until orbit decay.

## 6.2 Estimating drag coefficient

A reasonable value of the dimensionless drag coefficient,  $C_D$ , is 2.2 for a typical spacecraft. However,  $C_D$  depends on the shape of the satellite and the way air molecules collide with it. However, for certain geometric configurations such as spheres, cylinders and cones, the value of  $C_D$  can be evaluated more precisely than previously noted provided something is known about the flow regime and reference area<sup>[4]</sup>. The analyst shall consider  $C_D$  variations based on satellite shape. However, for long-duration orbit lifetime estimations,  $C_D$  variation as a function of orbit altitude<sup>[4]</sup> may safely be ignored, since the orbit lifetime percent error is quite small due to averaging effects about the adopted 2.2 value.

## 6.3 Estimating cross-sectional area with tumbling and stabilization modes

The ballistic coefficient has a sensitive impact on the orbit lifetime. The average cross-sectional area is one of three key components (the others being mass and drag coefficient) that comprise the ballistic coefficient. In this subclause, an explanation is given as to how average cross-sectional area should be estimated.

If the attitude of the spacecraft can't be anticipated (as is typically the case), the user shall compute a mean cross-sectional area assuming that the attitude of the spacecraft varies uniformly (relatively to the velocity direction), i.e. that all the possible attitudes can be achieved with the same probability and during the same time. The mean cross-sectional area is obtained by integrating the cross-sectional area across a uniform distribution of attitude of the spacecraft (as if an observer would observe a spacecraft from any direction and compute the resulting mean observed cross-section).

In the absence of a more detailed model, a composite flat-plate model may be utilized. For example, for a plane sheet with area  $S$ , it can be demonstrated that the "mean surface area" is  $S/2$  when averaged over all possible viewing angles; by extension, for a parallelepiped-shaped spacecraft,  $S_1$ ,  $S_2$ ,  $S_3$  being the three surfaces (their opposite sides are to be neglected because when a side is visible, the opposite one is masked), it can be demonstrated that this "mean surface area" is  $(S_1 + S_2 + S_3)/2$ . If a solar array of surface  $S_4$  is added, the mean surface area is then  $(S_1 + S_2 + S_3 + S_4)/2$  (neglecting any possible masking between the solar array and the spacecraft). This flat plate model has been shown to be accurate to within 20 % for tracked objects. Since masking effects represent a systematic bias that has the effect of reducing drag (thereby increasing orbit lifetime), an appropriately conservative cross-sectional area masking reduction factor shall be introduced to maintain accuracy.

To eliminate the requirement for such conservatism, this plate model approach can be extensively refined by integrating the cross-sectional area of the spacecraft across all anticipated tumbling attitudes (e.g. using a Computer-Aided Design or CAD program), and then dividing the result by the difference between the limits of integration. The analyst is then left with a properly weighted average cross-sectional area.

For satellites with a large length to diameter ratio, the analyst shall consider whether gravity gradient stabilization can occur and adjust the cross-sectional area based upon the anticipated stabilized geometry. Similarly, for satellites that have a large aero-torque moment (i.e. the centre-of-gravity and centre-of-pressure are suitably far apart and the aerodynamic force is suitably large), the analyst shall consider whether the satellite can experience drag-induced passive attitude stabilization and adjust the cross-sectional area accordingly.

#### 6.4 Estimating mass

The mass of the spacecraft shall be assumed to be its total mass at mission completion, where total mass is comprised of the spacecraft's dry mass plus the anticipated fuel margin of safety upon completion of the spacecraft's deorbit or safing manoeuvres.

STANDARDSISO.COM : Click to view the full PDF of ISO 27852:2011

## Annex A (informative)

### Space population distribution

The launch vehicle and its family of deployed objects pass through various orbit regimes during the ascent phase from launch up to the mission orbit. As can be seen in Figures A.1 and A.2, the collision risk is especially high in specific orbital regimes (the LEO and GEO belts and at the altitudes of deployed constellations).

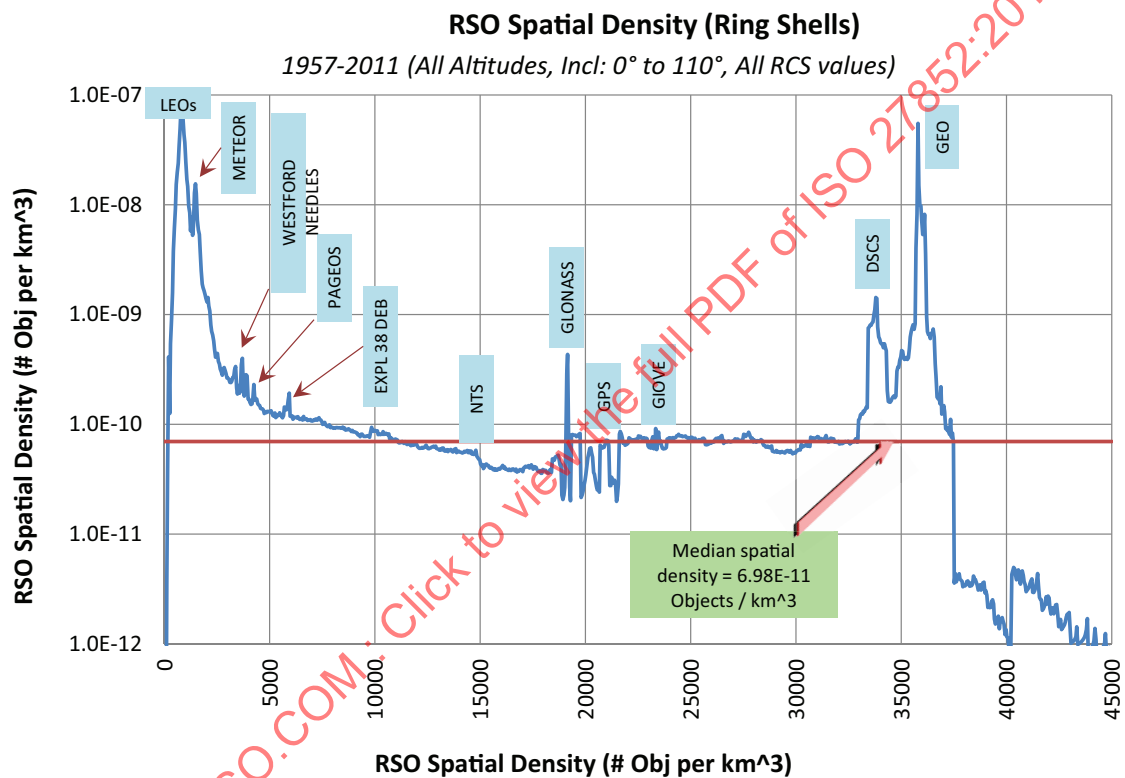


Figure A.1 — Sample near-earth space spatial density, 1998

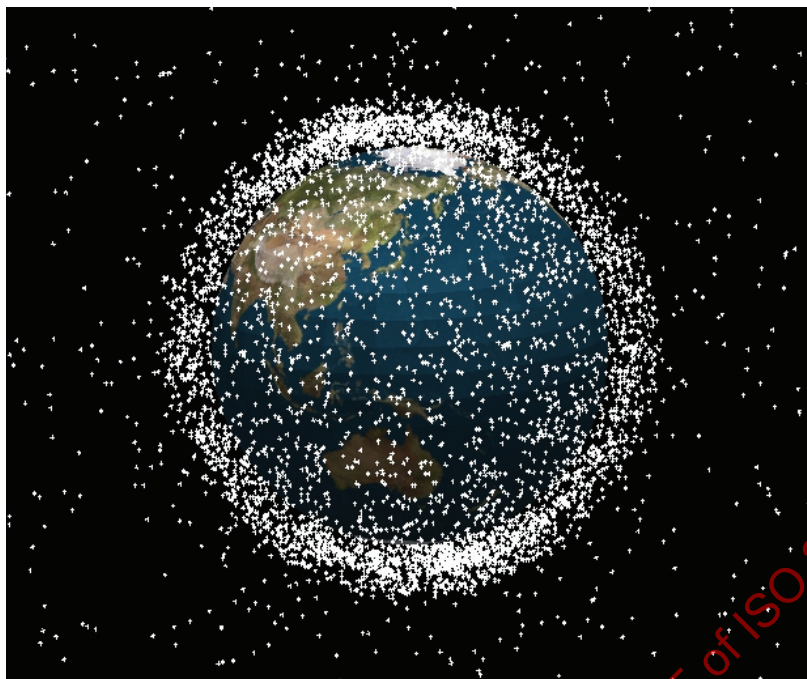


Figure A.2 — Distribution in low-earth orbit

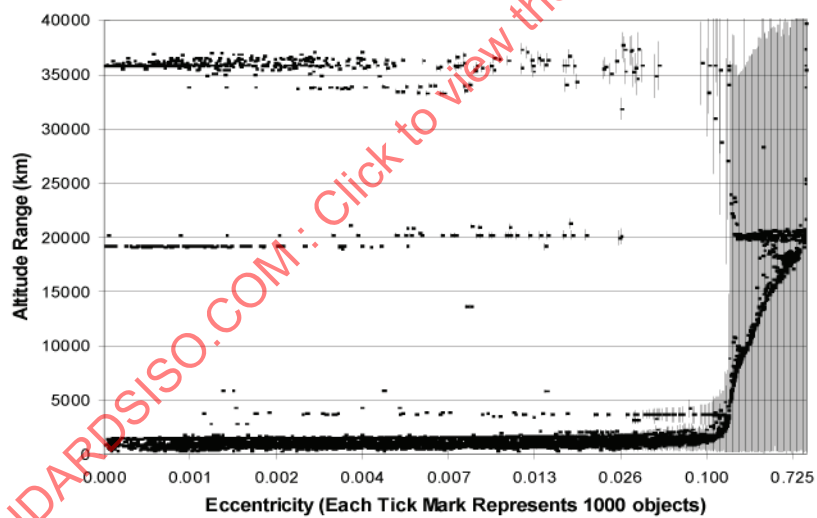


Figure A.3 — Space population by altitude and eccentricity



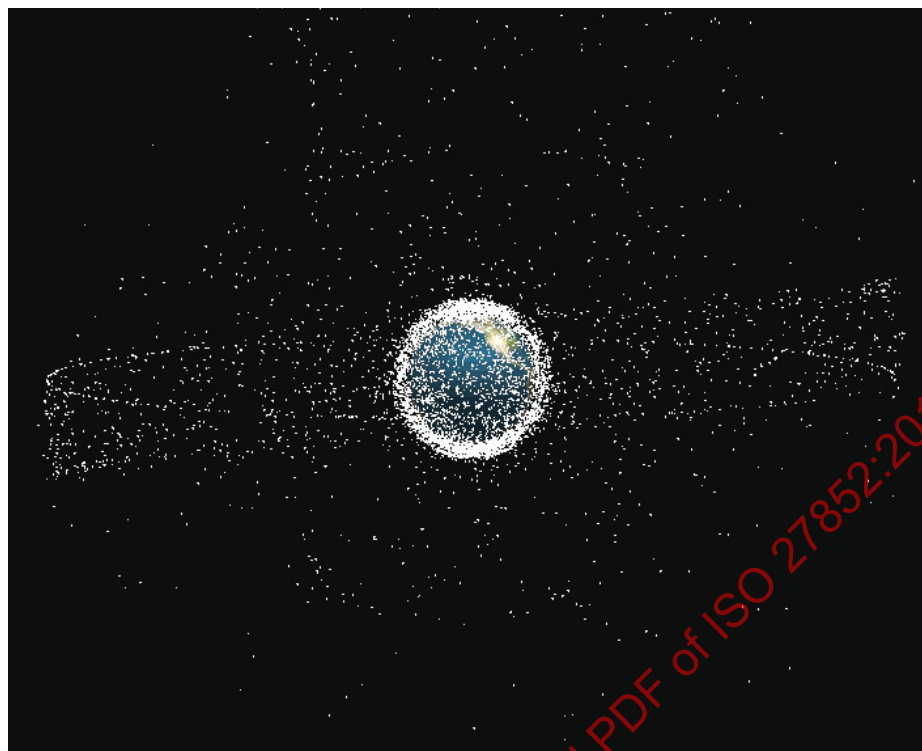


Figure A.4 — Distribution in near-earth space

## Annex B (informative)

### 25-year lifetime predictions using random draw approach

If the user of this International Standard wishes to estimate whether a space object has a 25-year orbit lifetime or not, a set of Method 3 analysis products have been generated and are available in this annex. These Method 3 data were generated utilizing the solar/geomagnetic modelling approach 1, coupled with a Method 2 orbit lifetime analysis tool (1Earth Research semi-analytic orbit propagator “QPROP”). QPROP was used to examine the  $8 \times 10^6$  cases contained in Table B.1, spanning a variety of times-into-the-solar-cycle, inclinations, perigee altitudes ( $H_p$ ), apogee altitudes ( $H_a$ ), and ballistic coefficients. QPROP uses semi-analytic propagation of mean orbit elements coupled with gravity zonals,  $J_2$  and  $J_3$ , and selected atmosphere models (including NRLMSISE-00, Jacchia-Bowman, Jacchia 1971, etc). QPROP has been used to analyse orbit lifetime and satellite re-entry by several government and industrial organizations. Its accuracy has been validated by high-precision numerical integration results (Method 1 type).

**Table B.1 — QPROP grid of test cases**


Parameter	Lower limit	Upper limit	Step size
Time into solar cycle (days)	0	2964,75	3 953/4
Inclination (degrees)	0	90	30
$C_D A/m$ (cm <sup>2</sup> /kg)	25	500	25
Perigee altitude (kilometres)	100	2 000	50
Apogee altitude (kilometres)	250	10 000	50
Number of trials	0	3	1

The primary independent variables of the orbit lifetime estimation process are contained in Table B.1. By stepping through all of these variables in the ranges and step sizes indicated in Table B.1, and then detecting those cases that result in a 25-year orbit lifetime, the dependencies between ballistic coefficient and orbit initial condition can be found. While both the NRLMSISE-00 and Jacchia-Bowman atmosphere models are implemented in QPROP, the NRLMSISE-00 model was used for these analyses due to its faster runtime with similar long-term propagation accuracy. Random draws of the triad of solar and geomagnetic index parameters (see 5.3) were implemented. In order to capture variations exhibited by the random draw process, several trials were used, four, in this case.

For a satellite having a ballistic coefficient of 200 cm<sup>2</sup>/kg and starting in a circular, equatorial orbit at the altitude shown, Figure B.1 depicts the resultant ranges of anticipated orbit lifetime. Between the “minimum” and “maximum” is incorporated the entire range of orbit decay start times with respect to the solar cycle minimum. The right-hand side of the plot shows how variable the results can get in the neighbourhood of a 25-year estimated lifetime.


The dependence of orbit lifetime upon orbit inclination is shown for the same 200 cm<sup>2</sup>/kg sample case in Figure B.2. In Figure B.2, it is seen that polar orbits experience reduced atmospheric drag, likely due to both the reduced time spent flying near the solar sub-point in combination with the reduced atmospheric density at the earth's poles due to the oblate shape of the earth and atmosphere.

**Orbit Lifetime vs Initial Circ Orbit Altitude  
( $C_d A/m=200 \text{ cm}^2/\text{kg}$ ; Equatorial Orbit)**

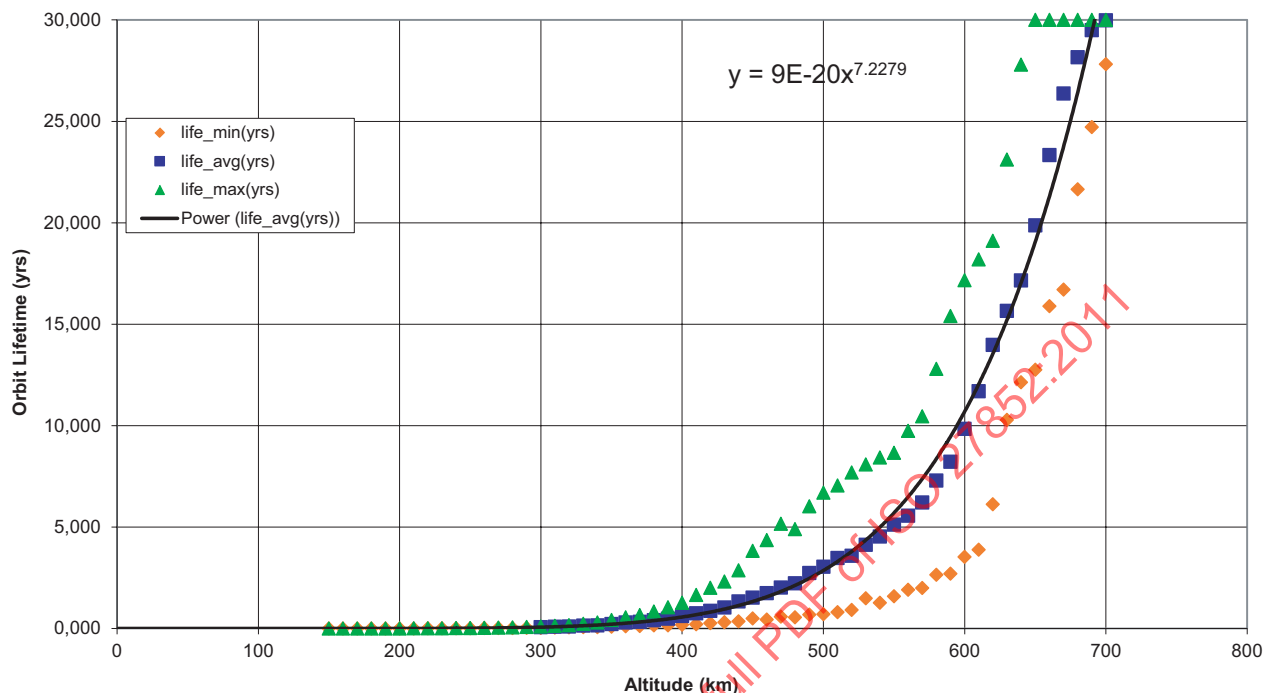

**Figure B.1 — Sample orbit lifetime ( $C_d A/m = 200 \text{ cm}^2/\text{kg}$ , equatorial orbit) as a function of initial orbit altitude**

**Orbit Lifetime Ratio Between Equatorial and Inclined Orbits**

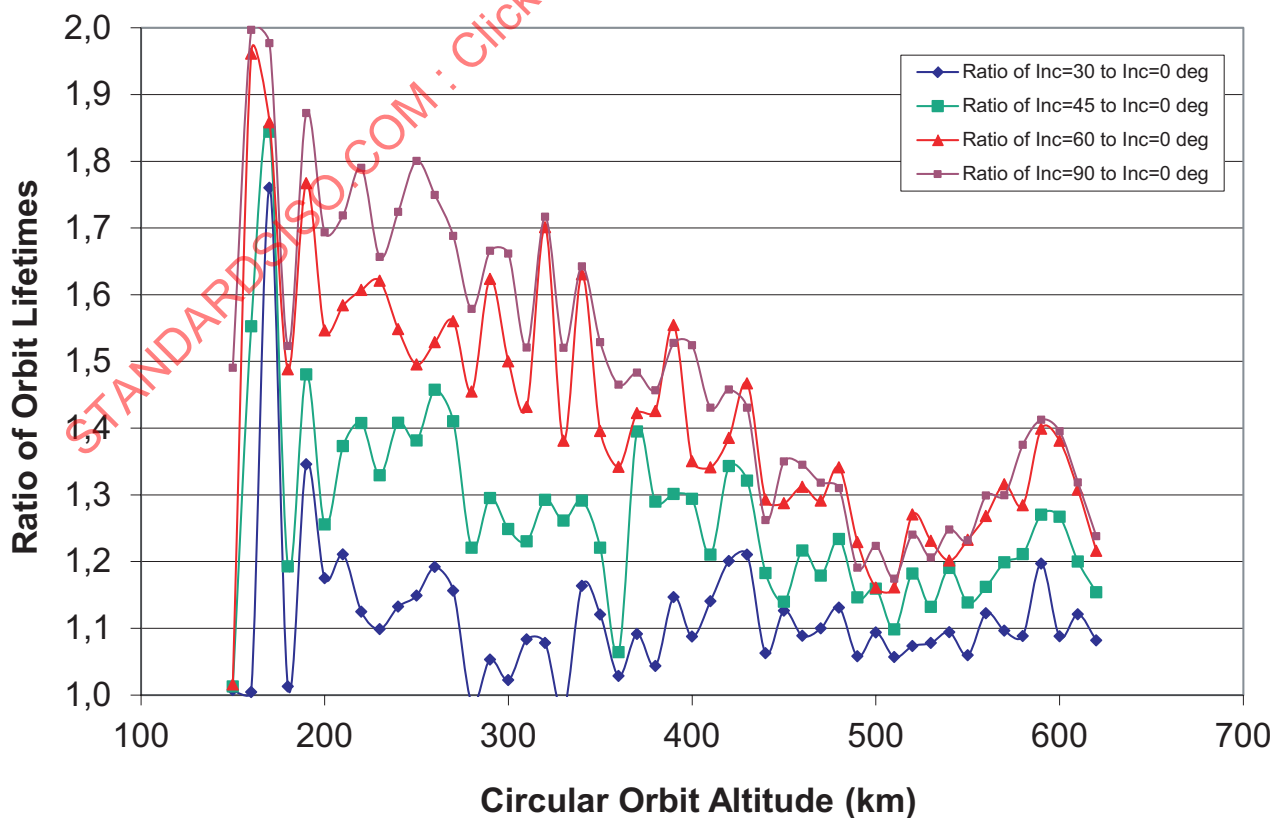

**Figure B.2 — Orbit lifetime dependence upon orbit inclination**

Future studies may use more trials and incorporate finer step sizes, but the large computer runtime requirements of these many cases led to the initial selection of four trials per initial set of orbit conditions. Through extensive simulation, it was found for *non-sun-synchronous* orbits that orbit lifetime results are not sensitive to the three angular orbit elements (RAAN, argument of perigee and mean anomaly) and, therefore, the three initial values are arbitrarily chosen and assumed for all cases. Be aware that the sensitivity to RAAN and argument of perigee can be significant for sun-synchronous, and more generally for high-eccentricity orbits, as discussed in 4.5.

It is recommended that sun-synchronous orbit cases be studied using a “Method 1” or “Method 2” approach; until such time as their orbit lifetimes can be appropriately categorized in graphical and/or functional form. Further, it was found that orbits having inclinations greater than 90° can be well represented by the pole-symmetric orbits having complementary orbit inclinations (justifying analysis of only 0° to 90° as shown in Table B.1).

The coloured regions shown in Figures B.3 and B.4 denote the categorization of the orbit initial conditions at the start of the orbit decay with respect to the IADC 25-year recommended post-mission lifetime. The “green” region denotes orbit initial conditions which result in an orbit lifetime shorter than 25 years (in all observed cases). The “yellow” region denotes initial orbit conditions that could result in an orbit lifetime that is greater than the recommended 25-year limit, in certain circumstances.

One can observe from Figures B.3 and B.4 that there is a wide variety of initial orbit, timing, solar and geomagnetic conditions that can combine to produce an orbit lifetime of 25 years. These figures, while helpful, still leave the user with uncertain knowledge of what the post-mission orbit lifetime will be, specific to their initial conditions. Fortunately, the results of the  $7,68 \times 10^6$  analyses have been retained<sup>[4]</sup>; interpolation of these results is possible to predict orbit lifetime for a specific set of initial conditions. And, to the extent that four sets of random draw cases is not necessarily an exhaustive analysis, additional cases can be run to further refine the orbit lifetime estimation grid and improve interpolation results.

Orbit lifetime data generated by the many analysis runs can be fit with a set of analytical expressions that predict *average* orbit lifetime (in years) as a function of  $H_p$ , inclination, ballistic coefficient and orbit eccentricity<sup>[4]</sup>. Be aware, however, that the resulting set of equations exhibits a peak deviation of up to 100 % from the underlying estimated lifetime data in extreme cases, coupled with an average standard deviation of less than 20 % error above 200 km. The effort invested in obtaining this unsuitable result indicates that a better approach would be to not fit the data, but rather to:

- a) use the Method 2 analysis tool to entirely map out the orbital lifetime topography<sup>[24]</sup>;
- b) store the lifetime topography data electronically;
- c) provide space operators with a simple and fast electronic access to a topography interpolation function.