
**Road vehicles — Visibility — Method for
establishment of eyellipses for driver's
eye location**

*Véhicules routiers — Visibilité — Méthode de détermination des ellipses
oculaires correspondant à l'emplacement des yeux des conducteurs*

STANDARDSISO.COM : Click to view the full PDF of ISO 4513:2010



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 4513:2010



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

| | |
|--|----|
| Foreword | iv |
| Introduction | v |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Adjustable seat 95th and 99th percentile tangent cut-off eyellipses for a 50/50 male and female gender mix | 4 |
| 4.1 Reference anthropometry | 4 |
| 4.2 Axis lengths | 5 |
| 4.3 Axis angles | 5 |
| 4.3.1 Rear and plan view angles | 5 |
| 4.3.2 Side view angle, β | 6 |
| 4.4 Centroid locations | 6 |
| 4.4.1 Locating equations | 6 |
| 4.4.2 Seats with vertical adjustment | 6 |
| 4.4.3 Left, right, mid-eye centroids | 7 |
| 5 Eyellipse locating procedure, Class A vehicles | 7 |
| 6 Neck pivot (P) and eye (E) points: locating procedure, Class A vehicles | 8 |
| 6.1 Background | 8 |
| 6.2 Neck pivot (P) points | 8 |
| 6.3 Eye (E) points | 9 |
| Annex A (informative) Adjustable seat tangent cut-off eyellipses for any user population stature distribution and gender mix | 10 |
| Annex B (informative) Fixed seat 95th and 99th percentile tangent cut-off eyellipses for an adult population at a 50/50 gender mix | 17 |
| Annex C (informative) Fixed seat tangent cut-off eyellipses for any user population stature distribution and gender mix | 21 |
| Annex D (informative) Tangent cut-off eyellipses and inclusive eyellipses | 26 |
| Annex E (informative) Eyellipses for Class B vehicles | 29 |
| Annex F (informative) Background to the revision of this International Standard | 32 |
| Bibliography | 34 |

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4513 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 17, *Visibility*.

This third edition cancels and replaces the second edition (ISO 4513:2003), which has been technically revised.

STANDARDSISO.COM : Click to view the full PDF of ISO 4513:2010

Introduction

This International Standard describes the eyellipse, a statistical representation of driver eye locations, which is used to facilitate design and evaluation of vision in motor vehicles. Examples of eyellipse applications include rearview mirror size and placement, wiped and defrosted areas, pillar size and location, and general exterior field of view. These applications are covered in other SAE and ISO practices.

This revision of the eyellipse is the most significant update to ISO 4513 since its inception. The eyellipses differ from the previous eyellipses in the following ways:

- a) the axis angles in plan view and rear view are parallel to vehicle grid;
- b) the side view X-axis angle is tipped down more at the front;
- c) for the 95th percentile eyellipse (99th shown in parentheses):
 - 1) the X-axis length is 7,5 (18,9) mm longer,
 - 2) the Y-axis is 44,6 (63,6) mm shorter,
 - 3) the Z-axis is 7,4 (10,1) mm longer;
- d) the centroid location is generally higher and more rearward;
- e) the centroid location in side view is a function of packaging geometry (SgRP, steering wheel location, seat cushion angle, and the presence or absence of a clutch pedal);
- f) the eyellipse is no longer positioned according to the driver's torso angle;
- g) the eyellipse for seat tracks shorter than 133 mm in length has an X-axis length unchanged from ISO 4513:2003. The Y- and Z-axis lengths, and the centroid location, are based on the new values and equations given in this International Standard;
- h) neck pivot (P) and eye (E) points are based on the previous plan view sight lines to rearview mirrors and A-pillars, but are adjusted to the shape and location of the new eyellipses.

New additions, incorporated as annexes, are summarized as follows.

- a) Fixed seat eyellipses for an adult user population at a 50/50 gender mix and 95th and 99th percentile tangent cut-offs are described (see Annex B). Fixed seat eyellipses and their locating equations given in Annexes B and C are based on data for second row passenger eye locations presented by UMTRI. In addition, a procedure is provided in Annex B for locating an eyellipse in a second row seat that has adjustable seat track travel or adjustable back angle.
- b) A procedure is given for calculating adjustable and fixed seat eyellipses for any user population stature and gender mix at selected percentile tangent cut-offs (see Annexes A and C).

Tables providing comparisons between tangent cut-off eyellipses and inclusive eyellipses are given. An inclusive eyellipse can be constructed using these tables (see Annex D).

Eyellipses for Class B vehicles are unchanged from ISO 4513:2003 (see Annex E).

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 4513:2010

Road vehicles — Visibility — Method for establishment of eyellipses for driver's eye location

1 Scope

This International Standard establishes the location of drivers' eyes inside a vehicle. Elliptical (eyellipse) models in three dimensions are used to represent tangent cut-off percentiles of driver eye locations. Procedures are provided to construct 95th and 99th percentile tangent cut-off eyellipses for a 50/50 gender mix, adult user population.

Neck pivot (P) points are defined to establish specific left and right eye points for direct and indirect viewing tasks described in SAE J1050. These P points are defined only for adjustable seat eyellipses.

This International Standard applies to Class A vehicles (passenger cars, multipurpose passenger vehicles and light trucks) as defined in SAE J1100. It also applies to Class B vehicles (heavy trucks).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6549, *Road vehicles — Procedure for H- and R-point determination*

SAE J1100, *Motor Vehicle Dimensions*

3 Terms and definitions

For the purposes of this document, the following terms given in ISO 6549 apply:

- a) H-point;
- b) seating reference point, SgRP.

For the purposes of this document the following terms given in SAE J1100 apply:

- 1) ball of foot reference point (BOFRP);
- 2) accelerator heel point (AHP);

NOTE For applications using the H-point machine described in ISO 6549, the term "operator heel point" is used instead of "accelerator heel point".


- 3) Class A and Class B vehicles;
- 4) H-point travel path, TL23, TH21;
- 5) A19 — Seat track rise;

- 6) H30 — Seat height;
- 7) L6 — Ball of foot reference point (BOFRP) to steering wheel centre.

For the purposes of this document the following definitions apply.

3.1
eyellipse
 contraction of the words “eye” and “ellipse” used to describe the statistical distribution of eye locations in three-dimensional space located relative to defined vehicle interior reference points

See Figure 1.

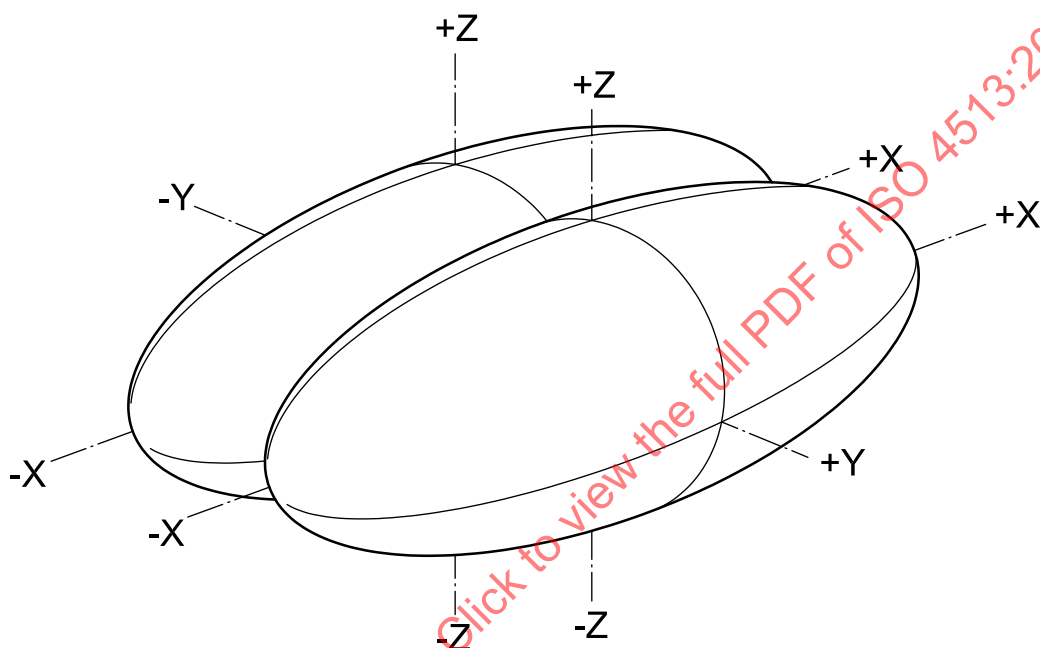

Key
 X, Y, Z ellipse axes

Figure 1 — Typical three-dimensional tangent cut-off eyellipse for the left and right eyes

3.2
cyclopean eye point
mid-eye point
 midpoint between left and right eye points or left and right eyellipse centroids at centreline of occupant

3.3
tangent cut-off plane
 plane tangent to an eyellipse

NOTE When projected at a specified angle or on to a specific target, a tangent cut-off plane can be considered to be a sight plane. In a two-dimensional view, a sight plane can be considered to be a sight line (see Figure D.1).

3.4
tangent cut-off eyellipse
 three-dimensional eyellipse derived as the perimeter of an envelope formed by an infinite number of planes dividing the eye locations so that P % of the eyes are on one side of the plane and $(100 - P)$ % are on the other

See Annex D.

3.5**neck pivot point****P point**

point about which a driver's head turns on a horizontal plane

See Figure 2.

3.6**point P1****point P2**


neck (head) pivot points used to position eye points for measuring the driver binocular obstruction due to A-pillars at the left and right side of the vehicle

See Figure 2.

3.7**point P3****point P4**

neck (head) pivot points used to position eye points for measuring driver field of view from rearview mirrors located to the left and right of the driver

See Figure 2.

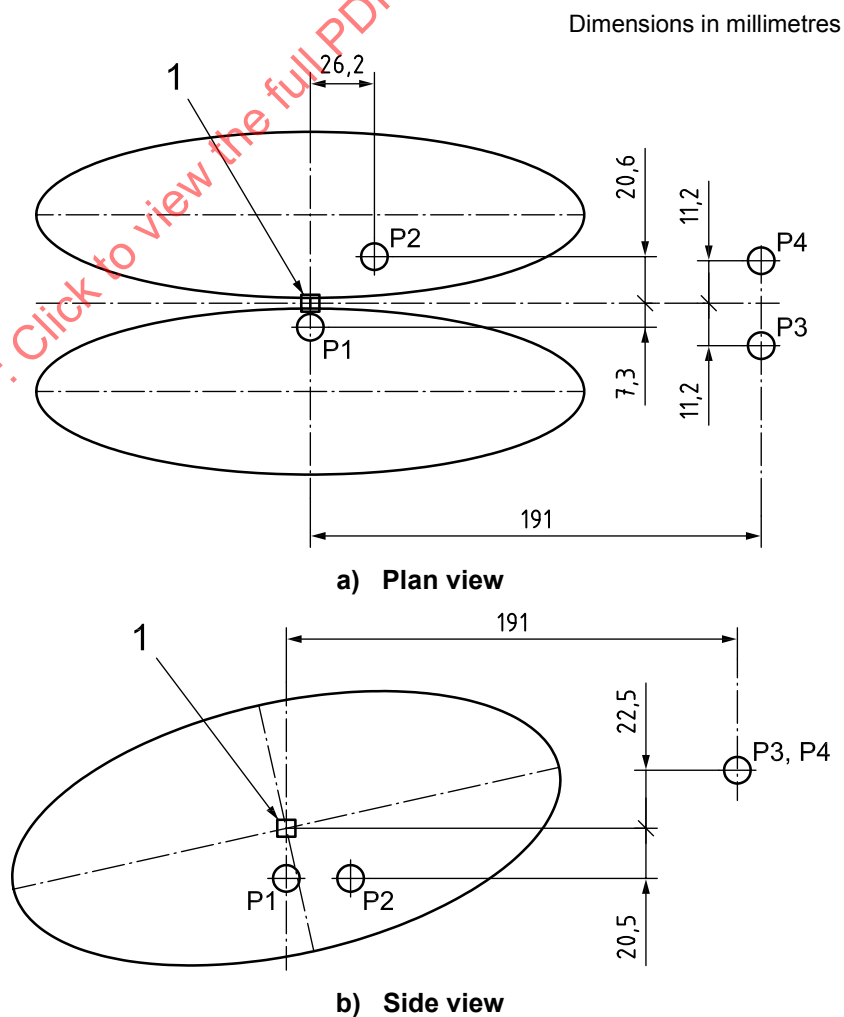**Key**

1 mid-eye centroid

NOTE Eyellipses are shown for reference purposes only.

**Figure 2 — P point locations relative to 95th percentile eyellipse mid-eye centroid
with seat track travel >133 mm**

3.8
eye point
E point

point representing an eye of the driver, used in conjunction with a neck pivot point to describe specific viewing tasks

See Figure 3.

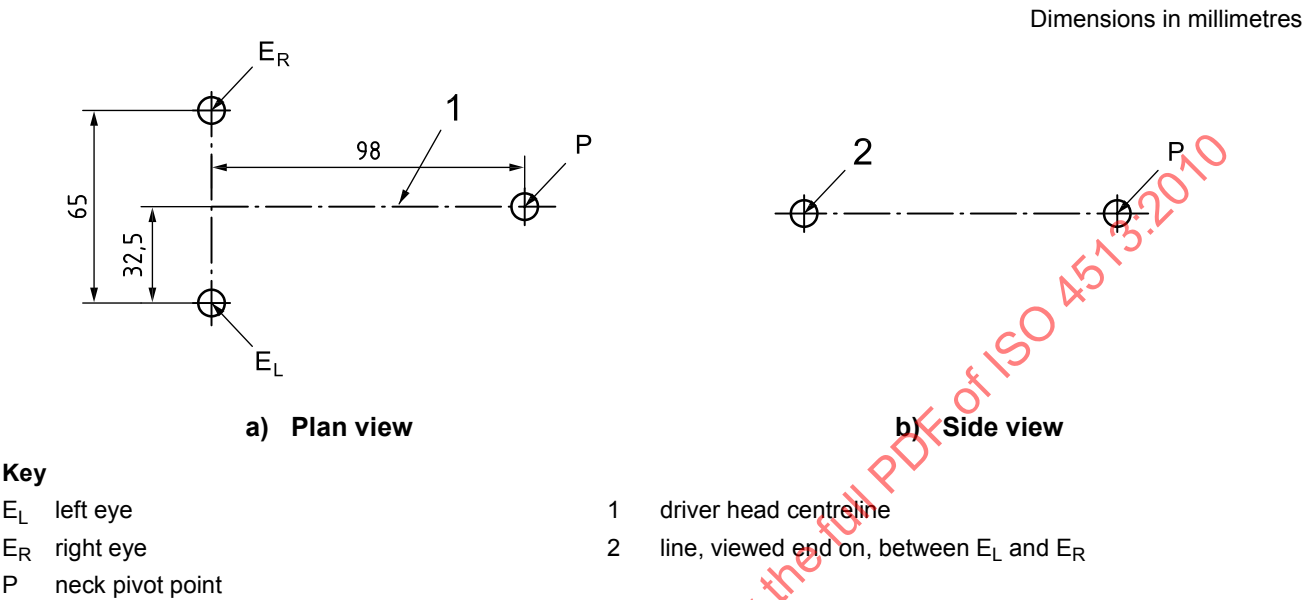


Figure 3 — Neck pivot point and associated eye points

3.9
inclusive eyellipse

eyellipse that contains a specified percentage of drivers' eyes within its boundaries

4 Adjustable seat 95th and 99th percentile tangent cut-off eyellipses for a 50/50 male and female gender mix

4.1 Reference anthropometry

These eyellipses are based on the user populations described in Table 1. Driver eyellipses for a 50/50 gender mix shall be used for designing Class A vehicles.

Table 1 — Reference anthropometry (see Reference [17])

Dimensions in millimetres

| Gender | Mean stature | Standard deviation of stature |
|--------|--------------|-------------------------------|
| Male | 1 755 | 74,2 |
| Female | 1 618 | 68,7 |

NOTE Standard deviations for each gender were estimated by dividing the difference between the 95th and 5th percentiles by the difference in z-scores (3,29).

The 95th and 99th percentile tangent cut-off eyellipses for a 50/50 gender mix are constructed from tables and equations given in 4.2 to 4.3.2. These eyellipses are applicable to driver and front outboard passenger seat locations.


4.2 Axis lengths

Axis lengths are given in Table 2 (see Figure 4).

Table 2 — Left and right eyellipse axis lengths (true view)

| Seat track travel (TL23) mm | Percentile | X-axis length mm | Y-axis length mm | Z-axis length mm |
|-----------------------------------|------------|---------------------|---------------------|---------------------|
| >133 | 95 | 206,4 | 60,3 | 93,4 |
| | 99 | 287,1 | 85,3 | 132,1 |
| 100 to 133 | 95 | 173,8 ^a | 60,3 | 93,4 |
| | 99 | 242,1 ^a | 85,3 | 132,1 |

^a For seat track travels of 100 mm to 133 mm, the eyellipse X-axis length is unchanged from ISO 4513:2003. No new eye position data were collected for these shortened seat track travels.

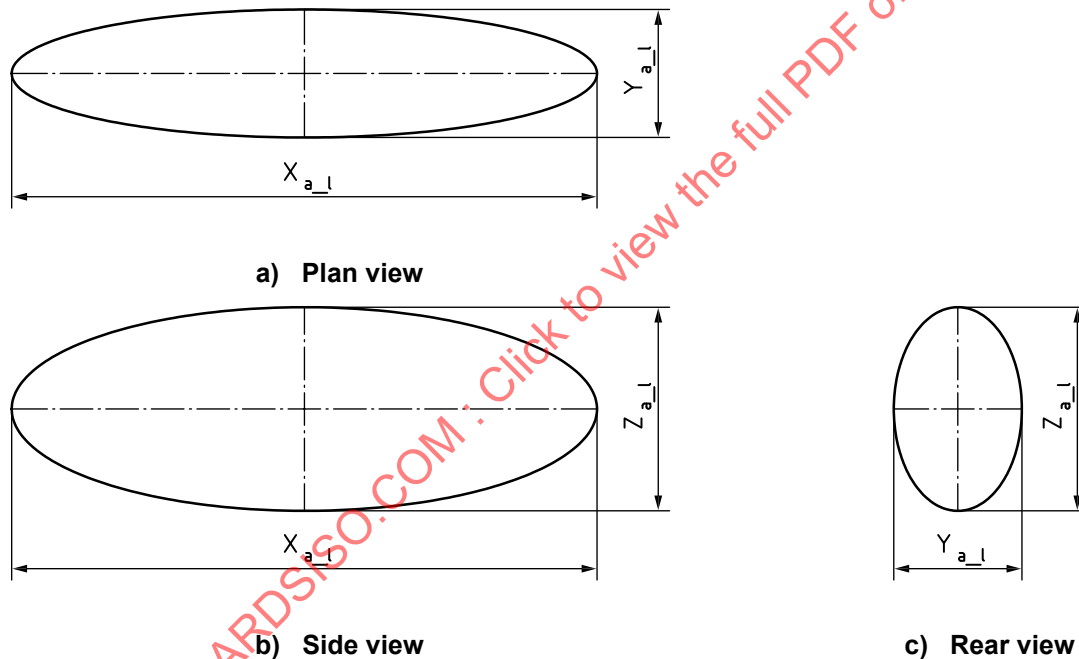

Key

X_{a_l} X-axis length
 Y_{a_l} Y-axis length
 Z_{a_l} Z-axis length

Figure 4 — Adjustable seat tangent cut-off eyellipse for one eye, three views

4.3 Axis angles

4.3.1 Rear and plan view angles

The eyellipse is aligned with the vehicle axes in plan view (Z-plane) and rear view (X-plane), but it is tilted down at the front in side view (Y-plane).

4.3.2 Side view angle, β

In side view, the angle, β , in degrees (positive, tipped down at the front from horizontal), of the eyellipse is:

$$\beta = 12,0 \quad (1)$$

4.4 Centroid locations

4.4.1 Locating equations

Equations (2) to (5) are used to calculate the eyellipse centroid location (see Figure 5).

$$X_c = L1 + 664 + 0,587 L6 - 0,176 H30 - 12,5 t \quad (2)$$

$$Y_{cL} = W20 - 32,5 \quad (3)$$

$$Y_{cR} = W20 + 32,5 \quad (4)$$


$$Z_c = H8 + 638 + H30 \quad (5)$$

where

- L1 is the x-coordinate of the BOFRP;
- L6 is the x distance from the steering wheel centre to the BOFRP;
- H30 is the z distance of the SgRP from the AHP;
- t is the transmission type (1 with clutch pedal, 0 without clutch pedal);
- W20 is the y-coordinate of the SgRP;
- H8 is the z-coordinate of the AHP.

4.4.2 Seats with vertical adjustment

For driver seats having vertical adjustment, Equations (2) to (5) were developed with H30 (and SgRP) positioned at the middle of the vertical adjustment range. Typically this was 20 mm to 25 mm vertically above the full down H-point travel path (Figure 5). If manufacturers define their SgRP so it is not 20 mm above the driver's full down H-point travel path, the accuracy in locating the vertical position of the eyellipse using the manufacturer's H30 dimension in Equation (5) is reduced. If the H-point vertical adjustment (TH21) is less than 40 mm, then H30 and the eyellipse Z centroid should be located from a point midway between the full up and full down travel path.

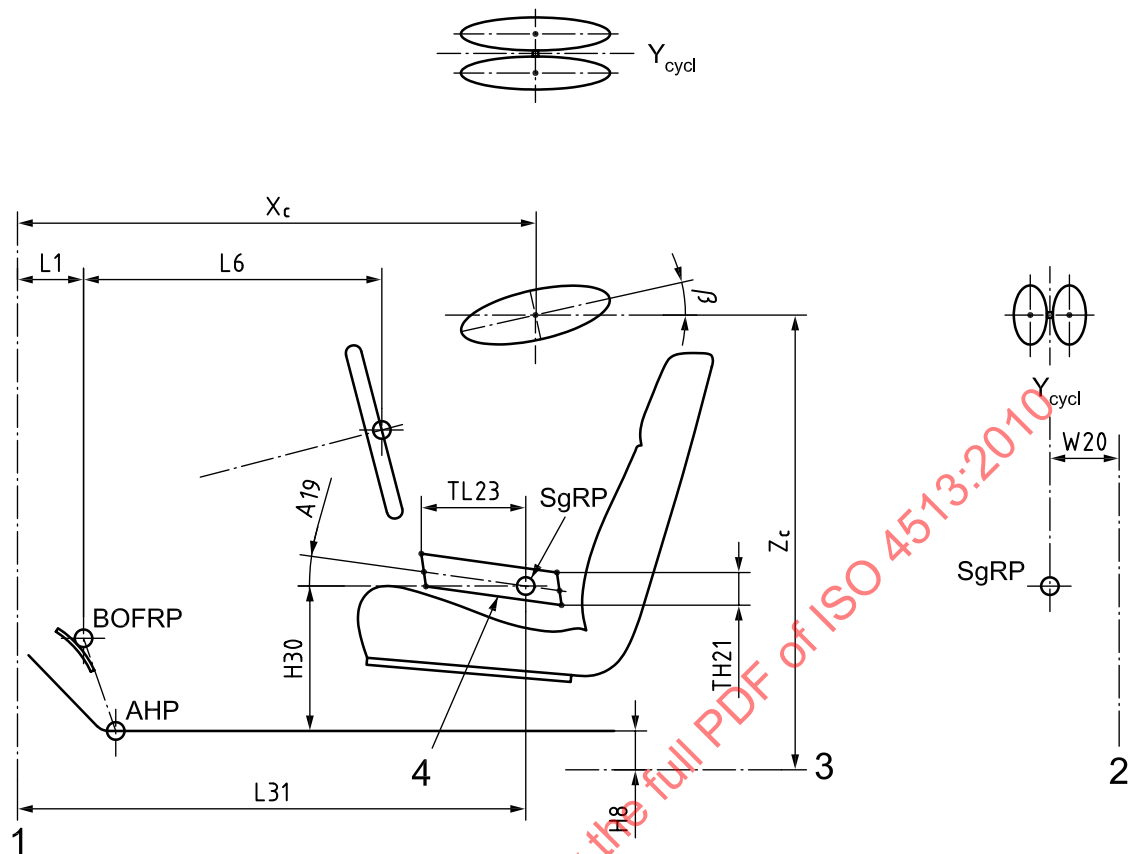

Key

| | | | |
|-------|--|------------|---|
| A19 | seat track rise | TL23 | seat track travel |
| AHP | accelerator heel point | W20 | y-coordinate of the SgRP |
| BOFRP | ball of foot reference point | X_c | x-coordinate of the eyellipse centroid location |
| H8 | z-coordinate of the AHP | Y_{cycl} | mid-eye y-coordinate |
| H30 | z distance of the SgRP from the AHP | Z_c | z-coordinate of the eyellipse centroid location |
| L1 | x-coordinate of the BOFRP | β | side view angle |
| L6 | x distance from the steering wheel centre to BOFRP | 1 | zero X grid |
| L31 | x-coordinate of the SgRP | 2 | zero Y grid |
| SgRP | seating reference point | 3 | zero Z grid |
| TH21 | H-point vertical adjustment | 4 | H-point travel path |

Figure 5 — Eyellipse package factors, side view axis angle and centroid location

4.4.3 Left, right, mid-eye centroids

The distance between the left eye centroid, Y_{CL} , and right eye centroid, Y_{CR} , is 65 mm. The mid-eye (cyclopean eye), Y_{cycl} , is located on the occupant centreline at W20.

5 Eyellipse locating procedure, Class A vehicles

The steps in the procedure are:

- determine seat characteristics A19, W20, H30, TL23;
- determine H8 and L6;

- c) determine t based on the percentage of vehicle production that has a clutch pedal — if 50 % or more of anticipated production has a clutch pedal, set $t = 1$. Otherwise, set $t = 0$;
- d) construct identical left and right eyellipses based on the axes given in Table 2;
- e) locate the centroids using Equations (2) to (5);
- f) tilt the front of the eyellipse X-axis down in side view according to Equation (1).

6 Neck pivot (P) and eye (E) points: locating procedure, Class A vehicles¹⁾

6.1 Background

These points are defined to simplify application of the eyellipse for specific viewing tasks requiring head and eye rotation in plan view (see SAE J1050). Neck pivot (P) points provide a plan view head rotation pivot centre so the left and right eye (E) points can be repositioned for these specific viewing tasks. These P points are derived from a 95th percentile, 50/50 gender mix eyellipse. To determine the P points, tangents were constructed to a forward target (A-pillar or exterior rearview mirror). Each P point was derived so that its left and right eye points were as close as possible to a tangent point on the surface of a 3D 95th percentile eyellipse. P points were not developed for the 99th percentile eyellipse.

6.2 Neck pivot (P) points

Locate these points relative to the cyclopean (mid-eye) eyellipse centroid using values given in Table 3 (see Figure 2).

The X, Y and Z values in Table 3 may be added to Equations (2), (3), (4) and (5), respectively, to obtain P point locations relative to the vehicle grid.

Table 3 — Neck pivot points relative to the 95th percentile eyellipse mid-eye centroid

Dimensions in millimetres

| Seat track travel (TL23) | Neck pivot point (P points) | X | Y (Left-hand drive) | Y (Right-hand drive) | Z |
|-----------------------------|--------------------------------|-------|------------------------|-------------------------|-------|
| >133 | P1 | 0 | −7,3 | +7,3 | −20,5 |
| >133 | P2 | 26,2 | +20,6 | −20,6 | −20,5 |
| >133 | P3 | 191,0 | −11,2 | +11,2 | +22,5 |
| >133 | P4 | 191,0 | +11,2 | −11,2 | +22,5 |
| <133 | P1 | 16,3 | −7,3 | +7,3 | −20,5 |
| <133 | P2 | 39,2 | +20,6 | −20,6 | −20,5 |
| <133 | P3 | 175,0 | −11,2 | +11,2 | +22,5 |
| <133 | P4 | 175,0 | +11,2 | −11,2 | +22,5 |

NOTE Positive values of X are rearward of the centroid, positive values of Y are right of the centroid and positive values of Z are above the centroid.

¹⁾ P points cited in regulations differ from those in 6.1 if the regulations are based on ISO 4513:2003 or before. Use the regulatory P points for compliance purposes.

6.3 Eye (E) points

Position the eye (E) points relative to the P points as shown in Figure 3 and the following equations:

$$E_x = P_x - 98 \quad (6)$$

$$E_L = P_y - 32,5 \quad (7)$$

$$E_R = P_y + 32,5 \quad (8)$$

$$E_z = P_z \quad (9)$$

where

P_x is the x-coordinate of the P point;

P_y is the y-coordinate of the P point;

P_z is the z-coordinate of the P point;

E_x is the x-coordinate for the left and right eye point;

E_z is the z-coordinate for the left and right eye point;

E_l is the y-coordinate of the left eye;

E_r is the y-coordinate of the right eye.

Annex A (informative)

Adjustable seat tangent cut-off eyellipses for any user population stature distribution and gender mix

A.1 General

In this annex, a procedure is given for constructing eyellipses for driver populations that are different from the standard population listed in Table 1, because the underlying stature distribution is different, the gender mix is different, or a different tangent cut-off contour is desired. The user can apply the equations given in this annex for gender mixes containing 10 % to 75 % females. For larger or smaller percentages of females in the driver population, the eyellipse side view axis angle and centroid Z location are incorrect.

A.2 Axis angles

The eyellipse is aligned with the vehicle axes in plan view (Z-plane) and rear view (X-plane), but it is tilted in side view (Y-plane). In side view the angle of the eyellipse is given in Equation (A.1) (see Figure 5).

$$\beta = 18,6 - A19 \quad (\text{A.1})$$

where A19 is the seat track rise angle.

A.3 Reference centroid location

A.3.1 Locating equations

The reference centroid for the normative part of this International Standard, calculated using Equations (A.2) to (A.4), is based on a driver population defined by NHANES III anthropometry (Reference [17]) and consisting of 50 % males and 50 % females (see Table 1). The mean stature for this reference population is 1 686 mm. A.6 describes how to adjust these equations for other national driver populations.

$$X_{\text{cref}} = L1 + 664 + 0,587 L6 - 0,176 H30 - 12,5 t \quad (\text{A.2})$$

$$Y_{\text{cref}} = W20 \quad (\text{A.3})$$

$$Z_{\text{cref}} = H8 + 638 + H30 \quad (\text{A.4})$$

where

- L1 is the x-coordinate of the BOFRP;
- L6 is the x distance from the steering wheel centre to the BOFRP;
- W20 is the y-coordinate of the SgRP;
- H8 is the z-coordinate of the AHP;
- H30 is the z distance of the SgRP from the AHP;
- t is the transmission type (1 with clutch pedal, 0 without clutch pedal).


A.3.2 Seats with vertical adjustment

For driver seats having vertical adjustment, Equations (A.2) to (A.4) were developed with H30 defined approximately 20 mm above the driver's full down H-point travel path (see Figure 5). If manufacturers define their SgRP at a vertical position that is not 20 mm above the full down H-point travel path, the accuracy in locating the vertical position of the eyellipse is reduced. If the H-point vertical adjustment (TH21) is less than 40 mm, then H30 and the eyellipse Z centroid should be located from a point midway between the full up and full down travel path.

A.4 Axis lengths

A.4.1 X-axis length


In this section the term side view axis length refers to the true length of the eyellipse X-axis, not the horizontal length in side view. Figures A.1 and A.2 illustrate the calculation of side view axis length.

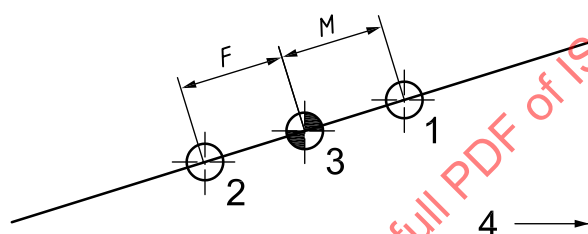

Key

- X eyellipse X-axis
- 1 male centroid
- 2 female centroid
- 3 reference centroid
- 4 rearward

Figure A.1 — Side view location of the male and female eye centroids relative to the reference centroid

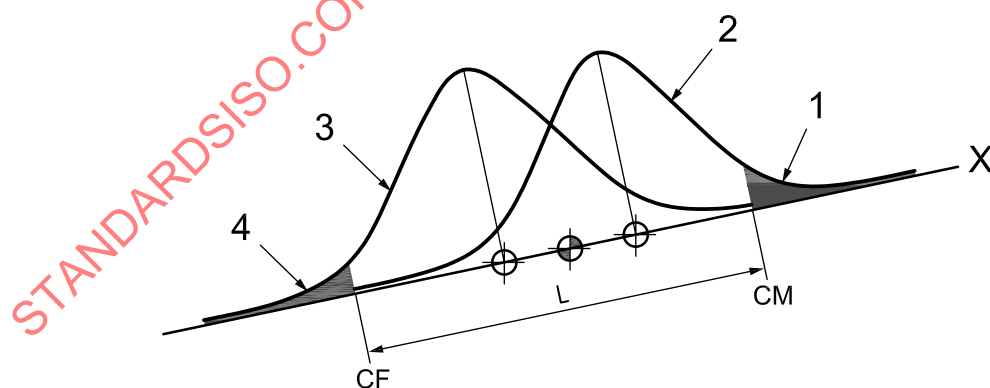

Key

- L length of eyellipse X-axis
- X eyellipse X-axis
- 1 excluded fraction of males
- 2 distribution of male eye locations
- 3 distribution of female eye locations
- 4 excluded fraction of females

Figure A.2 — Determination of eyellipse X-axis end points and length

The location of drivers' eyes along the side view axis is related to their stature by a factor of 0,473. That is, two drivers with stature differing by 10 mm have, on average, eyes located 4,73 mm apart along the side view axis, with the taller driver rearward. Similarly, two populations with mean stature differing by 10 mm have, on average, eyellipse centroids located 4,73 mm apart along the side view axis. Calculation of side view axis length takes into account the eye location distributions of two sub-populations of each driver population, one for males and one for females. Because males and females differ in average stature, their distributions also differ in average location along the side view axis.

In addition, the variability of the underlying stature distributions should be taken into account. The process of determining eyellipse X-axis length involves constructing the population eye location distribution along that axis and then finding the upper and lower cut-off points that represent the boundaries of the eyellipse along the side view axis. The underlying distribution of eye locations in side view is a mixture of two normal distributions, one for males and one for females.

To simplify calculation of the boundaries, the reference eye centroid calculated from Equations (A.2) to (A.4) is treated as the zero point along the side view axis, and the boundaries are calculated as offsets from the reference. First, the centroids of the male and female eye distributions along the side view eyellipse axis, M and F, respectively, are calculated relative to the reference eye centroid using Equations (A.5) and (A.6).

$$M = 0,473 (S_M - S_R) \quad (A.5)$$

$$F = 0,473 (S_F - S_R) \quad (A.6)$$

where

S_M is the mean male stature;

S_F is the mean female stature;

S_R is the mean stature of the reference driver population.

The standard deviation of each component distribution is calculated using Equations (A.7) and (A.8).

$$\sigma_{EM} = \sqrt{0,473^2 \sigma_M^2 + 41,87^2} \quad (A.7)$$

$$\sigma_{EF} = \sqrt{0,473^2 \sigma_F^2 + 41,87^2} \quad (A.8)$$

where

σ_{EM} is the standard deviation of the male eye location distributions along the side view axis;

σ_{EF} is the standard deviation of the female eye location distributions along the side view axis;

σ_M is the standard deviation of the male stature distribution;

σ_F is the standard deviation of the female stature distribution.

The two means and standard deviations define two overlapping normal distributions along the side view eyellipse X-axis (see Figure A.2). These may then be used with Equations (A.9) and (A.10) to determine lower (forward) and upper (rearward) eyellipse boundaries.

$$1 - q = p_M \times \Phi\left(\frac{CF - M}{\sigma_{EM}}\right) + (1 - p_M) \times \Phi\left(\frac{CF - F}{\sigma_{EF}}\right) \quad (A.9)$$

$$q = p_M \times \Phi\left(\frac{CM - M}{\sigma_{EM}}\right) + (1 - p_M) \times \Phi\left(\frac{CM - F}{\sigma_{EF}}\right) \quad (A.10)$$

where

p_M is the proportion of males in the population;

CF is the forward boundary of the eyellipse along the side view axis, relative to the reference centroid;

CM is the rearward boundary of the eyellipse along the side view axis, relative to the reference centroid;

q is the eyellipse cut-off percentile;

Φ is the cumulative normal distribution;

M is the mean male eye centroid along the side view axis, relative to the reference centroid;

F is the mean female eye centroid along the side view axis, relative to the reference centroid;

σ_{EM} is the standard deviation of the male eye location distribution along the side view axis;

σ_{EF} is the standard deviation of the female eye location distribution along the side view axis.

To find the upper and lower boundaries of the eyellipse along the side view axis, Equations (A.9) and (A.10) should be solved iteratively for CF and CM. Breaking the equation down, the portion inside parentheses that appears twice in each equation is the z -score of the lower or upper boundary with respect to the male or female eye position distribution (along the side view axis). The cumulative normal distribution returns the proportion of the distribution that lies below (forward) of the upper or lower boundary. In Equation (A.9), for example, there is an expression for the proportion of the female population whose eyes lie below the lower cut-off, and an expression for the proportion of the male population whose eyes lie below the lower cut-off. These proportions are then combined in a weighted average based on the relative proportions of males and females in the driver population.

The last step is to compute the X-axis length, X_{a_l} , which is simply the difference between CM and CF.

$$X_{a_l} = CM - CF \quad (A.11)$$

where

CF is the forward boundary of the eyellipse along the side view axis, relative to the reference centroid;

CM is the rearward boundary of the eyellipse along the side view axis, relative to the reference centroid.

A.4.2 Y- and Z-axis lengths

Since stature distribution does not affect axis length along the other two axes, their calculation is relatively simple. The only variable is the eyellipse cut-off percentile. The distributions along these two axes are modelled as single normal distributions with fixed standard deviations. Finding the axis endpoints is simply a matter of using the inverse normal cumulative distribution to solve for the cut-off points that exclude the appropriate proportion of the population. Equations (A.12) and (A.13) contain the specific formulae.

$$Y_{a_l} = 18,34 \times [\Phi^{-1}(q) - \Phi^{-1}(1-q)] \quad (A.12)$$

$$Z_{a_l} = 28,39 \times [\Phi^{-1}(q) - \Phi^{-1}(1-q)] \quad (A.13)$$

where

q is the eyellipse cut-off percentile;

Φ^{-1} is the inverse cumulative normal distribution.

A.5 Final centroid location

The forward and rearward boundaries of the eyellipse X-axis were computed relative to the eyellipse reference centroid. The boundaries may not be symmetrical around the reference centroid location. Thus, the final centroid should be computed according to Equations (A.14) to (A.16). These equations place the final centroid in vehicle grid at the midpoint between the two side view axis cut-off points and along the centreline of occupant.

$$X_c = X_{c_{ref}} + \frac{CF + CM}{2} \times \cos \beta \quad (A.14)$$

$$Y_c = Y_{c_{ref}} \quad (A.15)$$

$$Z_c = Z_{c_{ref}} + \frac{CF + CM}{2} \times \sin \beta \quad (A.16)$$

where

CF is the forward boundary of the eyellipse along the side view axis, relative to the reference centroid;

CM is the rearward boundary of the eyellipse along the side view axis, relative to the reference centroid.

A.6 Eyellipses for selected world populations

Stature values given in Table A.1 may be used to construct eyellipses for the specified populations by using the equations given in this annex.

CAUTION — These eyellipses have not been verified by field testing.

Table A.1 — Population anthropometry

Dimensions in millimetres

| Country | Gender | Mean stature | Standard deviation of stature | Mean seated height |
|---|---------|--------------|-------------------------------|--------------------|
| USA (reference) | Males | 1 755 | 74,2 | 922,1 |
| | Females | 1 618 | 68,7 | 859,7 |
| Japan | Males | 1 672,7 | 62,4 | 901,3 |
| | Females | 1 544,8 | 61,2 | 838,4 |
| Netherlands | Males | 1 806,2 | 80 | 944 |
| | Females | 1 690 | 70 | 887 |
| NOTE Data for Japan supplied by Toyota; data for Netherlands supplied by TNO; data for USA from Reference [17]. | | | | |

A.6.1 Axis lengths

Eyellipse axis lengths for a driver population consisting of an equal number of males and females, and a seat track length >133 mm, are given in Table A.2.

Table A.2 — Left and right eyellipse axis lengths

| Country | Percentile | X-axis length mm | Y-axis length mm | Z-axis length mm |
|---------------------|------------|---------------------|---------------------|---------------------|
| Japan | 95 | 195,1 | 60,3 | 93,4 |
| | 99 | 271,5 | 85,3 | 132,1 |
| Netherlands | 95 | 202,0 | 60,3 | 93,4 |
| | 99 | 283,1 | 85,3 | 132,1 |
| Reference (Table 1) | 95 | 206,4 | 60,3 | 93,4 |
| | 99 | 287,1 | 85,3 | 132,1 |

NOTE The difference in X-axis lengths among the reference population, Japanese and Dutch populations is very small, indicating that the 95th or 99th percentile eyellipses given in Table 2 are sufficient for most design purposes.

A.6.2 Centroid location

Compared to North American and European populations, Japanese are shorter in average stature and have a larger average ratio of sitting height to stature. These anthropometric differences likely require an adjustment to the location of their eyellipse centroid. Testing with Japanese drivers is necessary to derive or validate an equation for locating the centroid.

Similarly, because the Dutch population is taller on average than the reference (USA) population, resulting in higher seated eye heights, a different equation for locating the eyellipse centroid may also be needed for that population.

One approach, based strictly on anthropometry, is to adjust the eyellipse centroid Z value (from SgRP) proportionate to the ratio of average seated heights of the target country's population to seated heights of the reference population, as follows:

$$Z_{\text{cref}} = H8 + H30 + 638 \frac{h_T}{h_R} \quad (\text{A.17})$$

where

H8 is the z-coordinate of the AHP;

H30 is the z distance of the SgRP from the AHP;

h_T is the target population mean seated height;

h_R is the reference population mean seated height.

Adjust the eyellipse centroid X value from the BOFRP using Equation (A.5) (which is based on the difference between average stature of the target population and average stature of the reference population), as follows:

$$X_{\text{cref}} = L1 - 12,5 t + (664 + 0,587 L6 - 0,176 H30) + 0,473 (S_T - S_R) \cos \beta \quad (\text{A.18})$$

where

- L1 is the x-coordinate of the BOFRP;
- t is the transmission type (1 with clutch pedal, 0 without clutch pedal);
- L6 is the x distance from the steering wheel centre to the BOFRP;
- H30 is the z distance of the SgRP from the AHP;
- S_T is the target population mean stature;
- S_R is the reference population mean stature.

Table A.3 gives the adjustments in centroid location from the reference centroid for a population having an equal mix of males and females, using anthropometry values from Table A.1 and Equations (A.17) and (A.18).

Table A.3 — Change in eyellipse centroid location (50 % male population)

Dimensions in millimetres

| Country | X | Y | Z |
|--|-----|---|-----|
| Japan | –37 | 0 | –15 |
| Netherlands | 29 | 0 | 18 |
| NOTE Positive numbers are rearward and up from reference centroid. | | | |


Annex B (informative)

Fixed seat 95th and 99th percentile tangent cut-off eyellipses for an adult population at a 50/50 gender mix

B.1 Background

Fixed seat eyellipses apply to seated positions with no H-point or torso angle adjustment. The eyellipse centroid is located relative to the fixed seat H-point (SgRP). The only vehicle factor affecting location of the fixed seat eyellipse is the torso angle, A_{40} . Other seat adjustments are assumed fixed at the manufacturer's design specifications.

These eyellipses are based on the user populations described in Table 1. The 95th and 99th percentile eyellipses are constructed from tables and equations described in B.2 and B.3. Fixed seat eyellipses for other percentile tangent cut-offs and gender mixes can be calculated using procedures in Annex C.

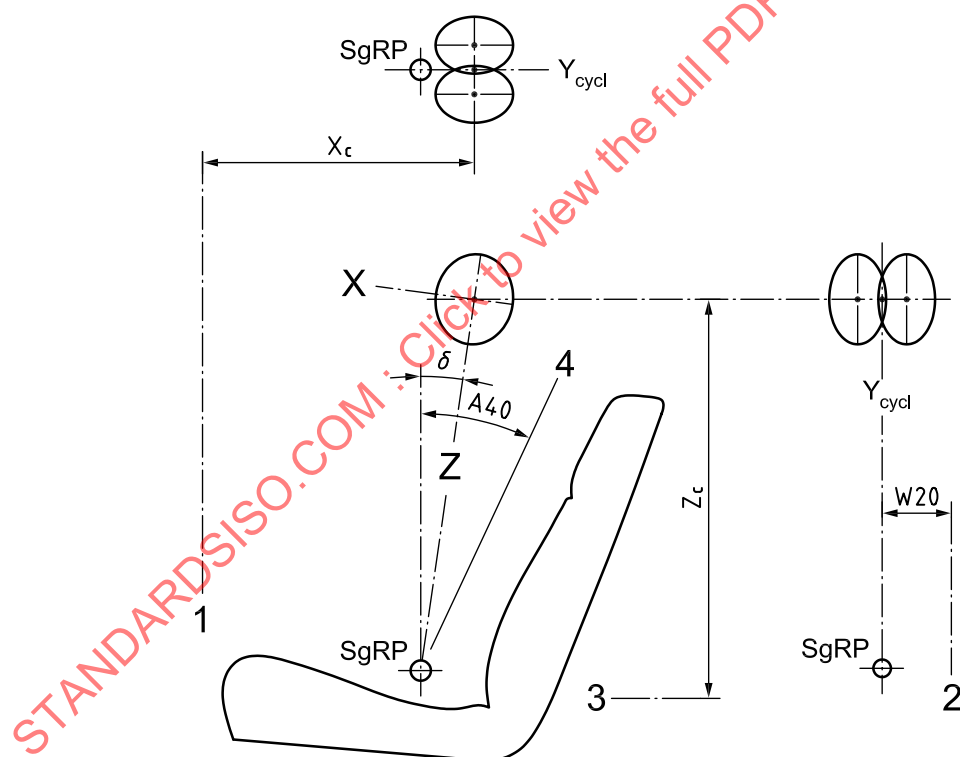

Key

| | | | |
|------------|---|---|-------------|
| X | eyellipse X-axis | 1 | zero X grid |
| Z | H-point to eye line (eyellipse Z-axis) | 2 | zero Y grid |
| δ | angle of the eyellipse Z-axis from vertical | 3 | zero Z grid |
| X_c | x-coordinate of the eyellipse centroid location | 4 | torso line |
| Y_{cycl} | y-coordinate of the eyellipse centroid location | | |
| Z_c | z-coordinate of the eyellipse centroid location | | |

Figure B.1 — Fixed seat eyellipse side view axis angle and centroid location

B.2 Axis angles

B.2.1 Plan and rear view axis angles

The eyellipse is aligned with the vehicle axes in plan view (Z-plane) and rear view (X-plane).

B.2.2 Side view axis angle

Unlike the adjustable seat eyellipse, the longer primary axis of the fixed seat eyellipse is the Z-axis. This primary Z-axis is tilted back from vertical along a line from the centroid to the H-point called the "H-point to eye line". The side view angle of the eyellipse Z-axis, positive, tipped back at the top from vertical, δ , in degrees, depends on the torso angle (see Equation B.1 and Figure B.1).

$$\delta = 0,698 A40 - 9,09 \quad (\text{B.1})$$

where A40 is the torso angle.


NOTE The dimension code for torso angle depends on the passenger seat position under study. A40-2 refers to passenger second row seating and A40-3 refers to passenger third row seating as defined in SAE J1100.

B.3 Axis lengths

Axis lengths are shown in Figure B.2 and listed in Table B.1.

Table B.1 — Fixed seat eyellipse axis lengths

| Percentile | X-axis length mm | Y-axis length mm | Z-axis length mm |
|------------|---------------------|---------------------|---------------------|
| 95 | 93,5 | 104,1 | 130,7 |
| 99 | 132,3 | 147,3 | 179,0 |

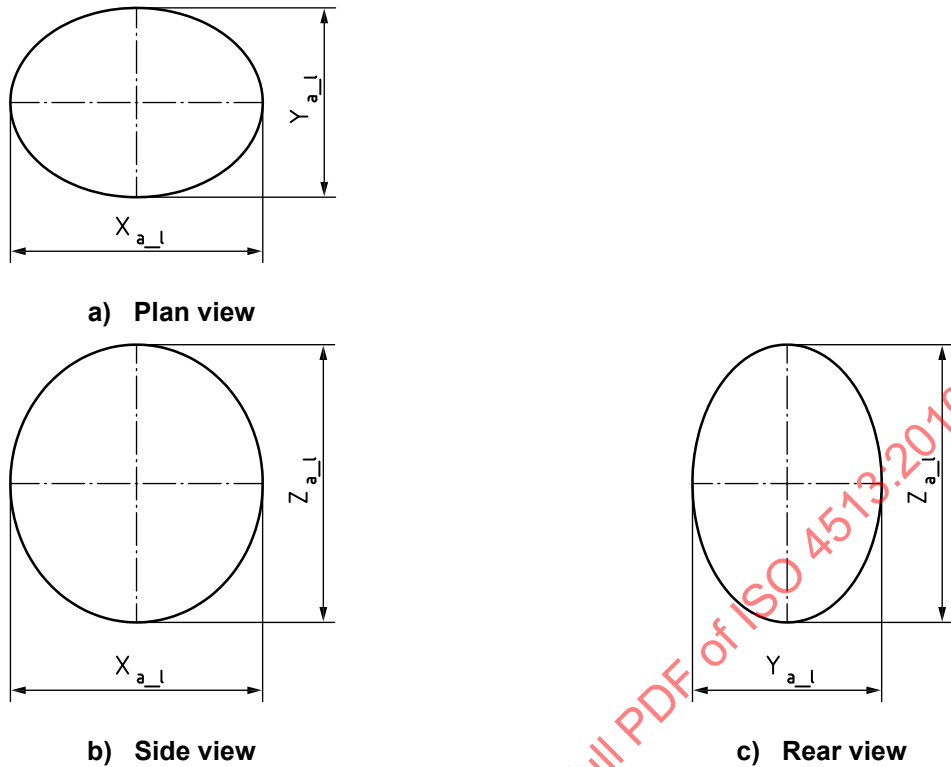**Key** X_{a_l} X-axis length Y_{a_l} Y-axis length Z_{a_l} Z-axis length**Figure B.2 — Fixed seat tangent cut-off eyellipse for one eye — True views****B.4 Centroid location****B.4.1 Locating equations**

Equations (B.2), (B.3), and (B.4) are used to calculate the eyellipse centroid location. Laterally, the cyclopean (mid-eye) location, Y_{cycl} , is at W20, which normally coincides with the seat centreline (see Figure B.1). In side view the centroid is located to vehicle grid using L31 for SgRP x-coordinate and H70 for SgRP z-coordinate.

$$X_c = L31 + 619 \times \sin \delta \quad (B.2)$$

$$Y_{cycl} = W20 \quad (B.3)$$

$$Z_c = H70 + 619 \times \cos \delta \quad (B.4)$$

where

L31 is the SgRP x-coordinate;

W20 is the SgRP y-coordinate;

H70 is the SgRP z-coordinate;

δ is the side view angle of the eyellipse Z-axis, in degrees (positive, tipped back at the top from vertical).

NOTE The dimension codes selected for SgRP coordinates (to grid) depend on passenger seat position under study: L31-2, W20-2 and H70-2 refer to second row passenger seating; L31-3, W20-3, and H70-3 refer to third row passenger seating.

B.4.2 Left and right centroids

The left and right eyellipse centroids are 65 mm apart, 32,5 mm either side of the mid-eye location.

B.5 Seats with limited H-point adjustment

If a second or succeeding row seat has fore and aft H-point adjustment, with a back angle that is either fixed or adjustable, there are no field data available on which to base a procedure for selecting or locating an eyellipse. Until such data are available, select the 95 % fixed seat eyellipse, locate it from the manufacturer's SgRP and torso angle, and then sweep the eyellipse along the range of normal riding fore and aft seat adjustment. The swept volume defines the range of rider eye locations. If the manufacturer's SgRP or torso angle is unknown, use the rearmost, lowest normal riding position and a torso angle of 25°.

STANDARDSISO.COM : Click to view the full PDF of ISO 4513:2010

Annex C (informative)

Fixed seat tangent cut-off eyellipses for any user population stature distribution and gender mix

C.1 General

Fixed seat eyellipses should be calculated from equations given in this annex when the user population is different from the reference population listed in Table 1, because the underlying stature distribution is different, the gender mix is different, or a unique cut-off contour is needed.

C.2 Axis angles

C.2.1 Plan and rear view angles

The eyellipse is aligned with the vehicle axes in plan view (Z-plane) and rear view (X-plane), but it is tilted in side view (Y-plane).

C.2.2 Side view angle

The side view angle of the eyellipse Z-axis (positive, tipped back at the top from vertical), δ , in degrees, depends on the torso angle (see Figure B.1):

$$\delta = 0,698 \times A40 - 9,09 \quad (C.1)$$

where A40 is the torso angle.

C.3 Axis lengths

C.3.1 Eyellipse Z-axis length

The following calculations are required to determine the Z-axis length.

C.3.1.1 Mean male and female H-point-to-eye distances

These values are calculated from the mean statures for the selected male and female population. Equations (C.2) and (C.3) are used to calculate the H-point-to-eye distance.

$$h_M = 67,0 + 0,351 S_M - 1,613 A40 \quad (C.2)$$

$$h_F = 67,0 + 0,351 S_F - 1,613 A40 \quad (C.3)$$

where

S_M is the mean population stature for males;

S_F is the mean population stature for females;

- h_M is the mean H-point-to-eye distance for males;
- h_F is the mean H-point-to-eye distance for females;
- A40 is the torso angle.

C.3.1.2 Mean male and female H-point-to-eye standard deviations

Calculate the standard deviation of H-point-to-eye distance for males and females according to Equations (C.4) and (C.5). The mean and standard deviation of the H-point-to-eye distance define the two overlapping normal distributions for males and females. These distributions lie along the primary axis (Z) of the fixed seat eyellipse and embody the way in which driver population anthropometry affects the location and size (in the Z-axis) of the fixed seat eyellipse.

$$\sigma_{HM} = \sqrt{0,351^2 \sigma_{SM}^2 + 384} \quad (C.4)$$

$$\sigma_{HF} = \sqrt{0,351^2 \sigma_{SF}^2 + 384} \quad (C.5)$$

where

- σ_{HM} is the standard deviation of H-point-to-eye distance along the eyellipse Z-axis for males;
- σ_{HF} is the standard deviation of H-point-to-eye distance along the eyellipse Z-axis for females;
- σ_{SM} is the standard deviation of stature for males;
- σ_{SF} is the standard deviation of stature for females.

C.3.1.3 Eyellipse Z-axis boundary and length

The steps so far are similar to the procedure used to construct the adjustable seat eyellipse, described in Annex A. As in that procedure, the primary axis length (in this case, the eyellipse Z-axis) is calculated by determining the cut-off values at the upper and lower ends of the distribution. To do this, Equations (C.6) and (C.7) should be solved iteratively for ZF and ZM.

$$1 - q = p_M \times \Phi\left(\frac{ZF - h_M}{\sigma_{HM}}\right) + (1 - p_M) \times \Phi\left(\frac{ZF - h_F}{\sigma_{HF}}\right) \quad (C.6)$$

$$q = p_M \times \Phi\left(\frac{ZM - h_M}{\sigma_{HM}}\right) + (1 - p_M) \times \Phi\left(\frac{ZM - h_F}{\sigma_{HF}}\right) \quad (C.7)$$

where

- p_M is the proportion of males in the population;
- ZF is the lower boundary of the eyellipse along the Z-axis;
- ZM is the upper boundary of the eyellipse along the Z-axis;
- q is the eyellipse cut-off percentile;
- Φ is the cumulative normal distribution;
- h_M is the mean H-point-to-eye distance for males;

h_F is the mean H-point-to-eye distance for females;

σ_{HM} is the standard deviation of H-point-to-eye distance along the eyellipse Z-axis for males;

σ_{HF} is the standard deviation of H-point-to-eye distance along the eyellipse Z-axis for females.

The length of the primary eyellipse axis (Z) is the difference between the upper and lower boundaries of H-point-to-eye distance, ZM and ZF.

$$Z_{a_l} = ZM - ZF \quad (C.8)$$

where

ZF is the lower boundary of the eyellipse along the Z-axis;

ZM is the upper boundary of the eyellipse along the Z-axis.

C.3.2 Eyellipse X-axis length

The length of the X-axis (perpendicular to eyellipse Z-axis in side view) depends on the variability in the H-point-to-eye angle relative to vertical. The side view angle, δ , is the mean H-point-to-eye angle. H-point-to-eye angle is distributed normally with a standard deviation of 2,63°. Thus, boundary angles can be computed using the normal distribution with mean δ and standard deviation 2,63. A radius at each boundary angle with length equal to the mean H-point-to-eye distance ends at the X-axis boundary of the fixed seat eyellipse. These radii are shown in Figure C.1 as r_u and r_l , and the distance between their endpoints is the X-axis length. This length is very close to the length of the arc between the endpoints, a value that can be calculated easily by multiplying the angle between the radii (in radians) by the radius length (the mean H-point-to-eye distance). The procedure described in this subclause is expressed mathematically in Equation (C.9) for a q-percentile ellipse.

$$X_{a_l} = \left(\frac{ZM + ZF}{2} \right) \left(\frac{\pi}{180} \right) \left[2,63 \times 2\Phi^{-1}(q) \right] \quad (C.9)$$

where


ZF is the lower boundary of the eyellipse along the Z-axis;

ZM is the upper boundary of the eyellipse along the Z-axis;

Φ^{-1} is the inverse cumulative normal distribution;

q is the eyellipse cut-off percentile;

π is the ratio of the circumference to the diameter of a circle, the transcendental number 3,141 592 6...

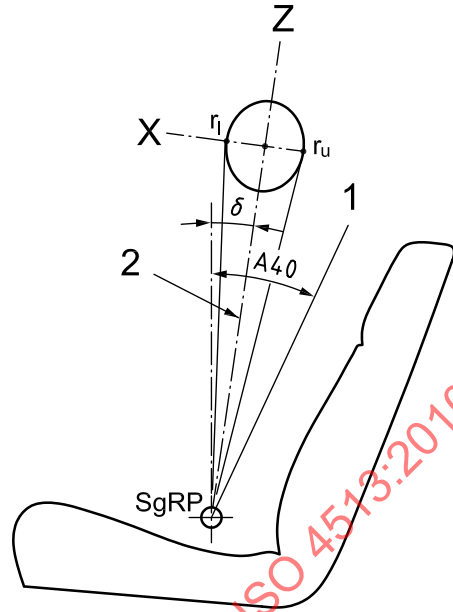

Key

A40 torso angle

r_u, r_l radii defining eyellipse X-axis length

X eyellipse X-axis

Z eyellipse Z-axis

δ angle of eyellipse Z-axis

1 torso line

2 H-point to eye line

Figure C.1 — Fixed seat eyellipse side view, (X, Z) axis, and axis angle, δ

C.3.3 Eyellipse Y-axis length

The Y-axis in the fixed seat eyellipse is the same as in the adjustable seat eyellipse. Eye location along the Y-axis is modelled as a normal distribution with a fixed standard deviation of 31,65 mm, regardless of population anthropometry (Reference [11]). Thus, Equation (C.10) gives the Y-axis length as a function of eyellipse percentile q .

$$Y_{a_l} = 31,65 \times 2\Phi^{-1}(q) \quad (C.10)$$

where

Φ^{-1} is the inverse cumulative normal distribution;

q is the eyellipse cut-off percentile.

C.4 Centroid location

The centroid of the fixed seat eyellipse is the midpoint between the two H-point-to-eye boundary points, along the primary axis and at the occupant centreline. Equations (C.11) to (C.13) give the centroid location relative to SgRP in the vehicle axis system.

$$X_c = \frac{ZM + ZF}{2} \times \sin \delta \quad (C.11)$$

$$Y_c = 0 \quad (C.12)$$

$$Z_c = \frac{ZM + ZF}{2} \times \cos \delta \quad (C.13)$$

where

ZF is the lower boundary of the eyellipse along the Z-axis;

ZM is the upper boundary of the eyellipse along the Z-axis;

δ is the side view eyellipse angle, in degrees (positive, tipped back at the top from vertical).

C.5 Summary

Equations (C.6) to (C.13) define the parameters of the fixed seat eyellipse for any adult population anthropometry. The shape of the eyellipse is the same across vehicles (for the same adult population) except for small differences in angle as a function of torso angle. Whereas the adjustable seat eyellipse is defined relative to the ball of foot reference point (BOFRP), the fixed seat eyellipse is expressed relative to SgRP, because the H-point is stationary when the seat and seatback are fixed (see Annex B).


STANDARDSISO.COM : Click to view the full PDF of ISO 4513:2010

Annex D (informative)

Tangent cut-off eyellipses and inclusive eyellipses

D.1 Tangent cut-off eyellipse

Tangent cut-off eyellipses are derived as the perimeter of an envelope formed by an infinite number of planes dividing the eye locations so that P % of the eyes are on one side of the plane and $(100 - P)$ % are on the other. To illustrate this in two dimensions, consider the side view of the eyellipse shown in Figure 4. If a plane seen as a straight line in side view is drawn tangent to the upper edge of the 95th percentile eyellipse, then 95 % of the eyes, whether inside or outside of the eyellipse, are below the line and 5 % of the eye locations are above it. Furthermore, if a similar plane is drawn tangent to the lower edge of the 95th percentile eyellipse, then 95 % of the eye locations, whether inside or outside the eyellipse, are above the line and 5 % below it.

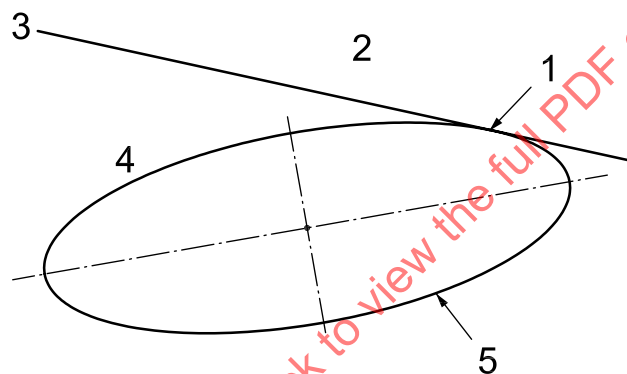

Key

- 1 tangent point
- 2 5 % of the driver eye locations are on this side of the tangent plane
- 3 tangent line
- 4 95 % of the driver eye locations are on this side of the tangent plane (both inside and outside the ellipse)
- 5 95 % eyellipse

Figure D.1 — Two dimensional tangent cut-off description

For example, if the tangent line shown in Figure D.1 is considered as a sight line (or sight plane) to the lowest point on the underside of the windshield header, 95 % of the drivers would see at that angle or higher and 5 % would see at that angle or lesser (restricted). Any targets in the forward field of view above the sight line would not be seen by 5 % of the drivers. If the target is on or below the sight line, at least 95 % of the drivers would see the target. For this reason the eyellipse is called a tangent cut-off ellipse.

Tangent cut-off eyellipses presented in previous clauses and annexes are used in various SAE J1050 applications to describe sight line accommodation. These are the most common and useful eyellipses for vehicle design.

D.2 Inclusive eyellipse

D.2.1 General

There may, however, be some applications for which it is useful to define an ellipse that encloses or contains the eye locations of some designated proportion of drivers. A 95th percentile tangent cut-off eyellipse does not enclose 95 % of the eye locations within the ellipse.

Each tangent cut-off eyellipse is also an inclusive eyellipse, i.e. it defines a boundary within which lie a certain percentage of drivers' eyes. The percentage of the population included within any ellipse is always less than the tangent cut-off percentage for that ellipse. For example, a 95 % tangent cut-off eyellipse contains 74 % of the eye locations within its two-dimensional boundaries and 56 % of the eye locations within its three-dimensional boundaries. Table D.1 lists a number of inclusive ellipses and their corresponding tangent cut-off eyellipse percentiles.

D.2.2 Axis lengths for inclusive ellipse, adjustable seat

Axis lengths for an inclusive eyellipse are given in the three rightmost columns of Table D.1 for the reference driver population (see Table 1) containing an equal number of males and females.

Table D.1 — Tangent cut-off eyellipse percentiles and corresponding 2D and 3D inclusive eyellipse percentiles, adjustable seat

| 2D inclusive (side view) % | 3D inclusive % | Tangent cut-off % | X-axis length ^a mm | Y-axis length ^a mm | Z-axis length ^a mm |
|----------------------------------|-------------------|----------------------|----------------------------------|----------------------------------|----------------------------------|
| 31,80 | 13,14 | 80,00 | 107,6 | 30,9 | 47,8 |
| 42,18 | 21,39 | 85,00 | 132,0 | 38,0 | 58,8 |
| 56,01 | 35,02 | 90,00 | 162,3 | 47,0 | 72,8 |
| 74,15 | 56,07 | 95,00 | 206,4 | 60,3 | 93,4 |
| 80,00 | 64,09 | 96,36 | 224,3 | 65,8 | 101,9 |
| 87,18 | 75,00 | 97,87 | 252,1 | 74,3 | 115,1 |
| 90,00 | 79,69 | 98,41 | 266,0 | 78,7 | 121,8 |
| 93,32 | 85,60 | 99,00 | 287,1 | 85,3 | 132,1 |
| 95,00 | 88,80 | 99,28 | 301,2 | 89,8 | 139,0 |
| 95,61 | 90,00 | 99,38 | 307,3 | 91,7 | 142,0 |
| 97,99 | 95,00 | 99,74 | 341,3 | 102,5 | 158,7 |
| 99,07 | 97,50 | 99,89 | 371,2 | 112,1 | 173,5 |
| 99,66 | 99,00 | 99,96 | 406,5 | 123,5 | 191,2 |

^a Axis lengths are shown for adjustable seat eyellipses, TL23 > 133 mm, 50/50 gender mix, reference driver population

Table D.1 may also be applied to define tangent cut-off eyellipses smaller than the 95th percentile. As an example, if it is necessary to determine driver accommodation to a specific vision target that is obscured to more than 5 % of drivers (e.g. by the windshield header), a smaller percentile cut-off eyellipse could be found (using Table D.1) for which a tangent from this eyellipse to the target is tangent to or below the header obstruction.