AS125401 HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION AN125401 THRU AN125550, REVISION 3, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE AN125401 THRU AN125550, REVISION 3, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS125401 THIRD ANGLE PROJECTION

REAFFIRMED 2012-11

1999-12

CUSTODIAN: E-25


PROCUREMENT SPECIFICATION: NONE



AEROSPACE STANDARD

RIVET - UNIVERSAL HEAD, CORROSION RESISTANT STEEL AS125401 THRU AS125550 SHEET 1 OF 3

Copyright 2012 SAE International

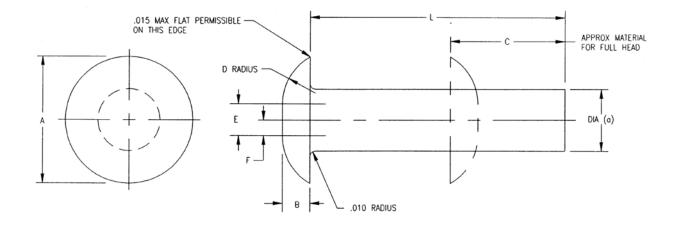

		 ,	3 - \	010 R	ADIUS				
		•	FIGU	RE 1		~ (°	5 0°	, 25h	, o^
			BLE I - DI	•	ONS				I
	DIAMETER	Α	+ 010	С	D	E	F	Х	
	.062 ± .001	.125 ± .006	.027	.116	.054	.031	.015	.010	
	.094 ± .001	.188 ± .009	.040	.169	.082	.046	.023	.010	
	.125 + .001 002	.250 ± .012	.054	.225	.108	.062	.031	.010	
	.156 + .001 002	.312 ± .016	.067	.281	.135	.078	.039	.015	
	188 + .001 002	.375 ± .019	.080	.338	.164	.093	.046	.015	
A. A.	.250 ± .002	.500 ± .025	.107	.450	.217	.125	.062	.020	
SALIN	.312 ± .002	.625 ± .031	.133	.561	.272	.156	.078	.020	
	.375 ± .002	.750 ± .037	.161	.675	.328	.187	.093	.020	

(a) SHANK DIAMETER TO BE MEASURED WITHIN .100 OF BASE OF HEAD.

SAE Aerospace An SAE International Group
--

|--|