

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV.
B

SAE
AS3411

FEDERAL SUPPLY CLASS
5306

RATIONALE

FIGURE 1 REDRAWN, TABLE 1 SMALLER SIZES -04 TO -13 ADDED, NOTE 1 ALTERED TO REFLECT SMALLER STARTING LENGTH, NOTE 4 CORRECT SPEC ADDED.

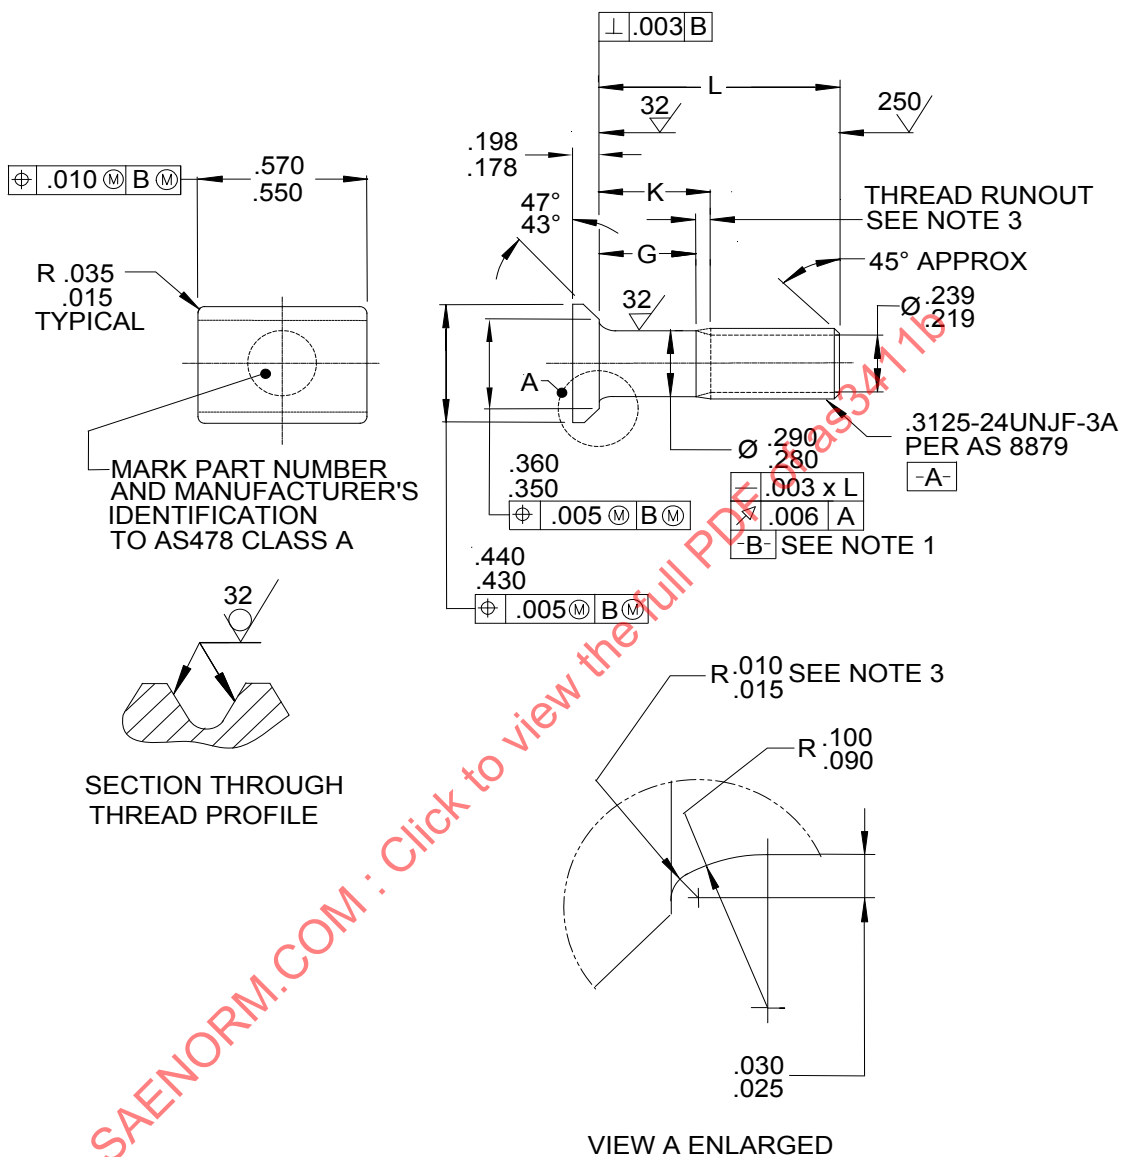


FIGURE 1

CUSTODIAN: E-25

PROCUREMENT SPECIFICATION: AS7467 SEE NOTE 3

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

(R) BOLT, TEE HEAD - AMS5662, CHAMFERED,
.3125-24 UNJF-3A (STRESS RUPTURE RESISTANT)

SAE AS3411
SHEET 1 OF 3

REV.
B

Copyright 2013 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: +1 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

ISSUED 1988-06 REAFFIRMED 2006-05 REVISED 2013-01

TABLE 1

PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100	PART NUMBER	L	G MIN	K MAX	APPROX MASS LB/100
AS3411-04	.490- .510	.063	.150		AS3411-34	2.740-2.760	1.732	1.875	6.41
AS3411-05	.552- .572	.063	.150	2.38	AS3411-35	2.865-2.885	1.857	2.000	6.64
AS3411-06	.615- .635	.063	.150	2.49	AS3411-36	2.990-3.010	1.982	2.125	6.87
AS3411-07	.678- .698	.063	.150	2.60	AS3411-37	3.115-3.135	2.107	2.250	7.11
AS3411-08	.740- .760	.063	.150	2.71	AS3411-38	3.240-3.260	2.232	2.375	7.34
AS3411-09	.802- .822	.063	.150	2.82	AS3411-39	3.365-3.385	2.357	2.500	7.57
AS3411-10	.865- .885	.063	.150	2.94	AS3411-40	3.490-3.510	2.482	2.625	7.81
AS3411-11	.928- .948	.063	.150	3.05	AS3411-41	3.615-3.635	2.607	2.750	8.03
AS3411-12	.990-1.100	.063	.150	3.16	AS3411-42	3.740-3.760	2.732	2.875	8.28
AS3411-13	1.052-1.072	.063	.188	3.28	AS3411-43	3.865-3.885	2.857	3.000	8.50
AS3411-14	1.115-1.135	.107	.250	3.39	AS3411-44	3.990-4.010	2.982	3.125	8.73
AS3411-15	1.178-1.198	.170	.312	3.50	AS3411-45	4.115-4.135	3.107	3.250	8.97
AS3411-16	1.240-1.260	.232	.375	3.62	AS3411-46	4.240-4.260	3.232	3.375	9.20
AS3411-17	1.302-1.322	.294	.438	3.74	AS3411-47	4.365-4.385	3.357	3.500	9.43
AS3411-18	1.365-1.385	.357	.500	3.85	AS3411-48	4.490-4.510	3.482	3.625	9.66
AS3411-19	1.428-1.448	.420	.562	3.97	AS3411-49	4.615-4.635	3.607	3.750	9.90
AS3411-20	1.490-1.510	.482	.625	4.09	AS3411-50	4.740-4.760	3.732	3.875	10.12
AS3411-21	1.552-1.572	.544	.688	4.20	AS3411-51	4.865-4.885	3.857	4.000	10.36
AS3411-22	1.615-1.635	.607	.750	4.32	AS3411-52	4.990-5.010	3.982	4.125	10.65
AS3411-23	1.678-1.698	.670	.812	4.43	AS3411-53	5.115-5.135	4.107	4.250	10.83
AS3411-24	1.740-1.760	.732	.875	4.55	AS3411-54	5.240-5.260	4.232	4.375	11.06
AS3411-25	1.802-1.822	.794	.938	4.67	AS3411-55	5.365-5.385	4.357	4.500	11.29
AS3411-26	1.865-1.885	.857	1.000	4.78	AS3411-56	5.490-5.510	4.482	4.625	11.53
AS3411-27	1.928-1.948	.920	1.062	4.90	AS3411-57	5.615-5.635	4.607	4.750	11.75
AS3411-28	1.990-2.010	.982	1.125	5.02	AS3411-58	5.740-5.760	4.732	4.875	11.99
AS3411-29	2.115-2.135	1.107	1.250	5.24	AS3411-59	5.865-5.885	4.857	5.000	12.22
AS3411-30	2.240-2.260	1.232	1.375	5.48	AS3411-60	5.990-6.010	4.982	5.125	12.45
AS3411-31	2.365-2.385	1.357	1.500	5.72					
AS3411-32	2.490-2.510	1.482	1.625	5.94					
AS3411-33	2.615-2.635	1.607	1.750	6.19					