NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION DOD-C-38999/45, NOTICE 2 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE DOD-C-38999/45, NOTICE 2. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

ON THE PROPERTY OF THE PROPER

THIRD ANGLE PROJECTION



PREPARED BY SAE SUBCOMMITTEE AE-8C1



AEROSPACE STANDARD

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, SOLDER MOUNTING, HERMETIC SOLDER CONTACTS, SERIES IV, METRIC


AS38999/45 SHEET 1 OF 3

Copyright 1998 Society of Automotive Engineers, Inc. All rights reserved.

Printed in the U.S.A.

SSUED

THE COMPLETE REQUIREMENTS FOR PROCURING THE CONNECTORS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-C-38999.

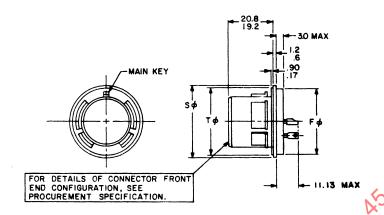

SHELL SIZE	SHELL SIZE CODE	FØ MAX	SØ MAX	D TØ
11	В	19.9	21.9	20.15 19.76
13	С	23.1	25.1	23.35 22.96
15	D	26.3	28.2	26.52 26.13
17	E	29.4	31.4	29.72 29.33
19	F	31-8	33.8	32.87 32.48
21	G	N 35.0	37.0	36.05 35.66
23	н	38.2	40.2	39.22 38.83
25	3 10	41.4	43.3	42.40 42.01

NOTE: 1. DIMENSIONS ARE IN MILLIMETERS.

FIGURE 1. RECEPTACLE, CLASSES N AND Y

REQUIREMENTS:

DIMENSIONS AND CONFIGURATIONS: SEE FIGURE 1. INTERFACE DIMENSIONS SHALL CONFORM TO MIL-C-38999.

THIS CONNECTOR MATES WITH: DOD-C-38999/46 AND /47.

MAIN KEY COLOR: BLUE.

FOR INSERT ARRANGEMENTS: SEE MIL-STD-1560.