


DRIVE-ACCESSORY, 10" BOLT CIRCLE

Issued 11-15-57
Revised

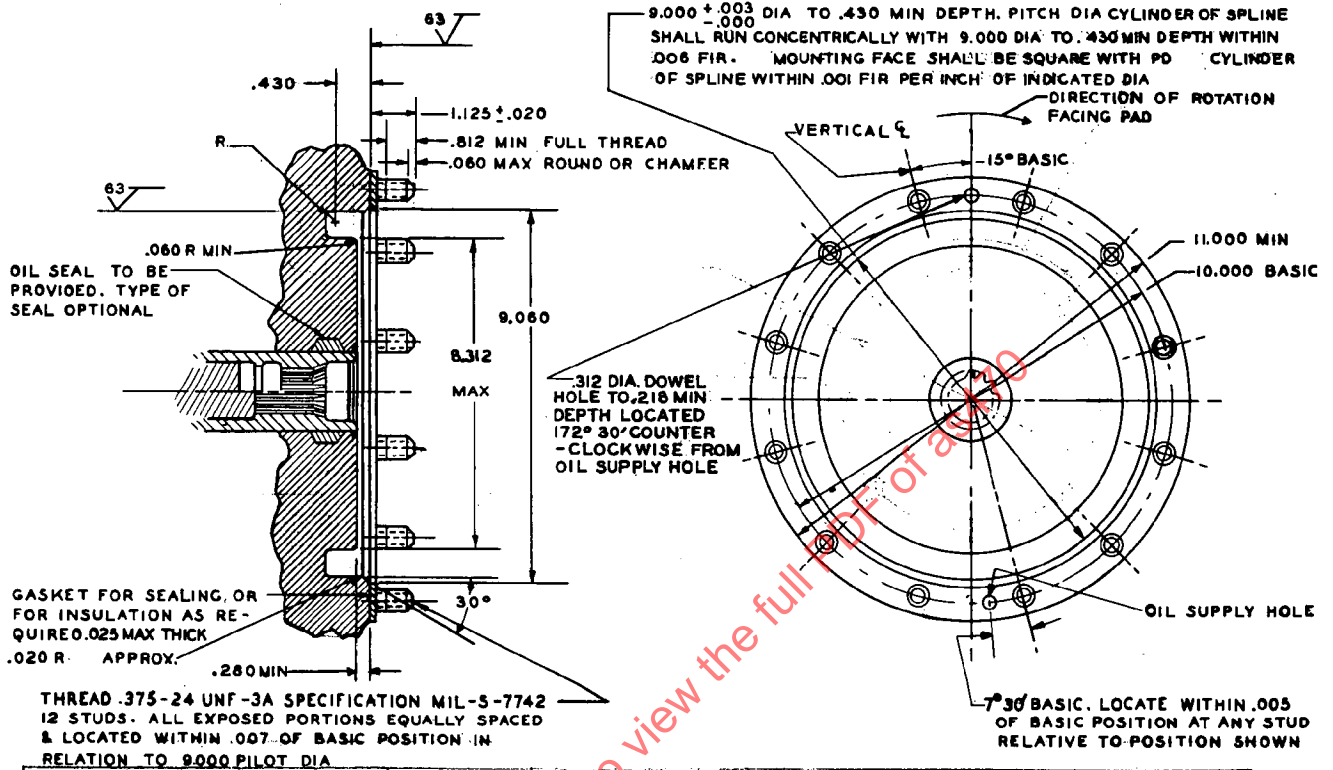

			DRIVE TYPE XXII- VARIABLE SPEED										6000 RPM CONSTANT			8000 RPM CONSTANT	
DASH NO.	OVERHUNG MOMENT LB-IN. MAX	ACCESSORY WT MAX LB	AV 30	BV 85	CV 125	DV 190	EV 250	FV 335	GV 30	HV 85	A6C 65	B6C 190	C6C 250	A8C 95	B8C 250		
1	500	75									X						
2	1000	100							X					X			
3	1000	160															
4	2000	175								X							
5	3000	225		X	X							X					
6	4000	300				X							X		X		

WHERE AN X APPEARS, THE DRIVE TYPE AND DASH NO. IS TYPICAL & PREFERRED.

SEE SHEET 2 FOR SPLINE SIZES AND DETAILS.

THE OVERHUNG MOMENT AND WEIGHT WILL BE DESIGNATED BY A DASH NUMBER IN THE DRIVE CALLOUT PER ABOVE TABULATION. EXAMPLE XXII-BV-4 IS 85 H. P. DRIVE WITH 2000 LB-IN. MOMENT AND 175 ACCESSORY WEIGHT.

SPEED: TYPE AV THROUGH FV DRIVES SHALL BE 7700 $\pm$ 200 RPM, TYPES GV AND HV 9800 $\pm$ 200 RPM WHEN POWER SOURCE IS OPERATING AT MAX POWER SOURCE SPEED.

TYPE 6C DRIVES SHALL BE 6000 (CONSTANT) RPM FROM GROUND IDLE TO MAX POWER SOURCE SPEED.

TYPE 8C DRIVES SHALL BE 8000 (CONSTANT) RPM FROM GROUND IDLE TO MAX POWER SOURCE SPEED.

STRENGTH: TYPE V DRIVES SHALL BE CAPABLE OF DELIVERING RATED POWER CONTINUOUSLY FROM GROUND IDLE TO MAXIMUM POWER SOURCE SPEED.

THEY SHALL ALSO WITHSTAND A STATIC TORQUE EQUIVALENT TO FIVE (5) TIMES RATED POWER AT GROUND IDLE SPEED WITHOUT FAILURE OR PERMANENT DEFORMATION. THIS STATIC TORQUE VALUE SHALL BE SPECIFIED IN THE POWER SOURCE MODEL SPECIFICATION. THE CONTINUOUS AND STATIC TORSIONAL STRENGTH OF THE TYPE C DRIVES SHALL BE SPECIFIED IN THE POWER SOURCE OR CONSTANT SPEED TRANSMISSION (DRIVE) MODEL SPECIFICATION.

OIL SUPPLY HOLES: DOWEL HOLE AND HOLES FOR SUPPLYING OIL TO ACCESSORY SHALL NOT BE PROVIDED UNLESS SPECIFIED IN THE POWER SOURCE MODEL SPECIFICATION. WHEN SO SPECIFIED, THE AVAILABLE OIL PRESSURE AND FLOW SHALL BE STATED IN THE MODEL SPECIFICATION WITH ONE HOLE LOCATION SHOWN ABOVE. SIZE OF OIL SUPPLY, AND DRAIN HOLES IF REQUIRED, SHALL BE SHOWN ON THE POWER SOURCE INSTALLATION DRAWING. PLUGS SHALL BE FURNISHED FLUSH OR BELOW PAD SURFACE.

OIL LEAKAGE OUT OF DRIVE SHALL NOT EXCEED 300 PER HOUR.

ADAPTERS: ADAPTERS IN ACCORDANCE WITH AS 515 AND AS 516 SHALL BE FURNISHED WHEN SPECIFIED IN THE MODEL SPECIFICATION.

COVER: AN100044 SHALL BE FURNISHED ON THIS DRIVE WHEN SPECIFIED IN POWER SOURCE MODEL SPECIFICATION.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS $\pm$.010, ANGLES $\pm$ 2°.

ACCESSORY SPACE: SPACE AVAILABLE FOR ACCESSORIES SHALL BE AS SHOWN ON THE INSTALLATION DRAWING.

NOMINAL USE: THE NOMINAL USE OF THE VARIABLE SPEED TYPE DRIVES IS TO DELIVER POWER TO VARIABLE SPEED ACCESSORIES OR CONSTANT SPEED TRANSMISSIONS. THE NOMINAL USE OF THE CONSTANT SPEED TYPE DRIVES IS TO DELIVER POWER TO CONSTANT SPEED ACCESSORIES. HIGH SPEED FLUID POWER PUMPS MAY BE USED ON TYPE AV THROUGH FV DRIVES WITH TORQUE VALUES SPECIFIED IN THE POWER SOURCE MODEL SPECIFICATION.

THIS DRAWING COMPLETELY DEFINES THE DESIGN REQUIREMENTS.

SURFACE ROUGHNESS SYMBOL $\sqrt{\text{ }}$, AS 107 (RMS) OR AS 291 (AA).

THIS IS A DESIGN STANDARD AND IS NOT TO BE USED AS A PART NUMBER.

FOR DETAILS OF TYPE XXII FLANGE, SEE AS 473.