



AEROSPACE STANDARD

AS 965


SOCIETY OF AUTOMOTIVE ENGINEERS, Inc.

485 Lexington Ave., New York, N. Y. 10017

Issued 10-31-67

Revised

DRIVE - STUDDED, ACCESSORY, 8.000 BC ROUND, DESIGN STANDARD FOR

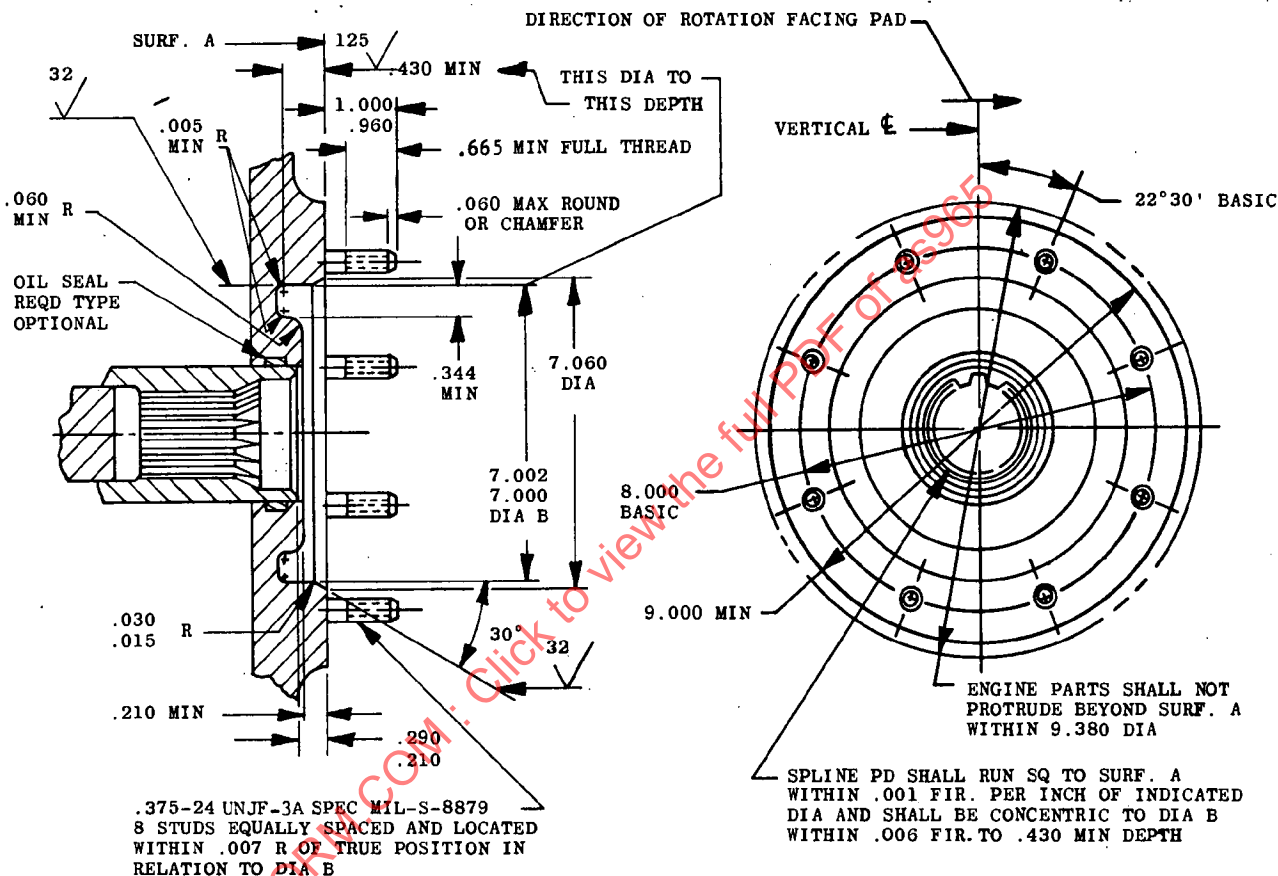

VARIABLE SPEED (ELECTRICAL EQUIPMENT)					
DASH NO.	RATED POWER HP	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
-1V	30	8000	0.800	80	750
-2V	30	12000	0.800	100	1200
-3V	40	8000	1.200	115	1250
-4V	65	8000	1.200	150	2000

VARIABLE SPEED-CONSTANT TORQUE (FLUID POWER PUMPS)					
DASH NO.	RATED TORQUE LB IN.	RATED SPEED RPM $\pm 5\%$	SPLINE SIZE PD	ACCESSORY	
				WEIGHT LB MAX	STATIC OVERHUNG MOMENT LB IN. MAX
-1CT	4000	4000	1.625	125	600
-2CT	4000	6000	1.625	125	600

SAE Technical Board rules provide that: "All technical reports, including standards approved and practices recommended, are advisory only. Their use by anyone engaged in industry or trade is entirely voluntary. There is no agreement to adhere to any SAE standard or recommended practice, and no commitment to conform to or be guided by any technical report. In formulating and approving technical reports, the Board and its Committees will not investigate or consider patents which may apply to the subject matter. Prospective users of the report are responsible for protecting themselves against infringement of patents."