

Issued 2000-05
Revised 2004-08

Superseding J2494 MAY2000

**Dimensional Specifications for Metallic Body Push-to-Connect Fittings
Used on a Vehicular Air Brake System**

1. Scope—This SAE Standard covers general and dimensional specifications for brass bodied reusable Push-to-Connect tube fittings for use in the piping of vehicular air brake systems. This type of fitting is intended for use with nylon tubing per SAE J844. Performance requirements for SAE J844 are covered in SAE J2494-3. See SAE J2494-3 for the Performance Requirements of Reusable (Push-to-Connect) Fittings Intended for Use in Automotive Air Brake Systems and U.S. Department of Transportation FMVSS 571.

2. References

2.1 Applicable Publications—The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated, the latest issue of publication shall apply.

2.1.1 SAE PUBLICATIONS—Available from SAE, 400 Commonwealth Drive, Warrendale, PA 15096-0001.

SAE J476—Dryseal Pipe Threads

SAE J512—Automotive Tube Fittings

SAE J844—Nonmetallic Air Brake System Tubing

SAE J846—Coding Systems for Identification of Fluid Conductors and Connectors

SAE J2494-3—Performance Requirements for SAE J844 Non-Metallic Air Brake Tubing and Push-to-Connect Fitting Assemblies Used in Vehicular Air Brake Systems

2.1.2 ANSI PUBLICATION—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ANSI B 1.1—Unified Inch Screw Threads

2.1.3 FEDERAL PUBLICATIONS—Available from the Superintendent of Documents, U. S. Government Printing Office, Mail Stop: SSOP, Washington, DC 20402-9320.

FMVSS 571.106—Standard No. 106; Brake Hoses

2.1.4 ISO PUBLICATIONS—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ISO 7-1—Pipe threads where pressure-tight joints are made on the threads—Part 1: Dimensions, tolerances and designation

ISO 228-1—Pipe threads where pressure-tight joints are not made on the threads

ISO 261—General purpose metric screw threads general plan

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

Copyright © 2004 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER:

Tel: 877-606-7323 (inside USA and Canada)

Tel: 724-776-4970 (outside USA)

Fax: 724-776-0790

Email: custsvc@sae.org

<http://www.sae.org>

SAE WEB ADDRESS:

2.2 Related Publications—The following publications are for information purposes only.

2.2.1 ANSI PUBLICATIONS—Available from ANSI, 11 West 42nd Street, New York, NY 10036-8002.

ANSI B 1.20.3—Dryseal Pipe Threads
ANSI B 18.2.2—Square and Hex Nuts Inch Series

2.2.2 ASTM PUBLICATION—Available from ASTM, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM B 249—Specification for Wrought Copper and Copper Alloy Rod Bar and Shape

3. General Specifications—The following general specifications supplement the dimensional data contained in Tables 1A to 4B with respect to all unspecified details.

3.1 Identification—Any one component of the fitting shall be permanently and legibly marked according to the current U.S. Department of Transportation FMVSS 571.106 Regulation (NHTSA). The location of such markings shall be optional with manufacturer.

3.2 Size Designations—Fitting sizes are designated by the corresponding nominal outside diameter of the tubing for the various sizes of tube ends and by the corresponding standard nominal pipe size for pipe thread ends.

3.3 Dimensions and Tolerances—Except for nominal size and thread specifications, dimensions and tolerances are given in both SI units and U.S. customary as designated. Tabulated dimensions shall apply to the finished parts. The maximum and minimum across flat dimensions shall be within the commercial tolerance of bar or extruded stock from which the fittings are produced.

Angular tolerance on axis of ends of elbows and tees shall be ± 2.50 degrees for sizes up to and including 3/8 in (8 mm), and ± 1.50 degrees for sizes larger than 3/8 in (8 mm).

The minimum across corners dimensions of hexagons shall be 1.092 times the nominal width across flats, but shall not result in a side flat width less than 0.43 times the nominal width across flats.

Wrenching surfaces shall fit standard wrench openings. Where so illustrated, hexagon corners shall be chamfered 30 degrees ± 5 degrees to a diameter equal to the nominal width across flats, with a tolerance of -0.41 mm (-0.016 in); or, where design permits, corners may be chamfered to the diameter of the abutting surface, provided the length of chamfer does not exceed that produced by the 30 degree chamfer previously described.

Tabulated dimensions apply to measurements taken when the release mechanism is in the “in” position.

3.4 Passages—The minimum flow diameter through any section of the air brake fitting shall not be less than 66% of the nominal inside diameter of the air brake tubing.

Where passages in straight fittings are machined from opposite ends, the offset at the meeting point shall not exceed 0.38 mm (0.015 in). The cross-sectional area at the junction of passages in angle fittings shall not be less than that of the smallest passage. At manufacturer's option, all passages in a particular fitting may conform with the smallest diameter specified for that fitting. Where the passage is specified as tap drill diameter or less, the minimum shall be no less than the minimum diameter of the smallest passage in the fitting.

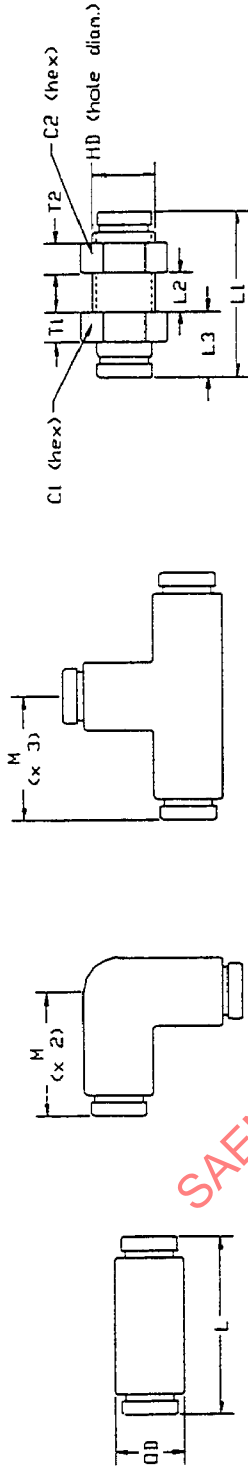


Figure 1a (AA0101)

Figure 1b (AA0201)

Figure 1c (AA0401)

Figure 1d (AA0501)

FIGURE 1—UNION CONNECTORS

TABLE 1A—DIMENSIONS OF UNION CONNECTORS⁽¹⁾ (FIGURE 1) - METRIC DIMENSIONS

Tube Size	C1, hex maximum	C2, hex maximum	HD maximum	L maximum	L1 maximum	L2 maximum	L3 maximum	M maximum	OD maximum	T1 maximum	T2 maximum
1/4	27.2	27.2	16.5	54.1	48.0	29.0	19.1	25.9	15.5	3.0	4.1
5/16	—	—	—	44.7	—	—	—	25.4	17.3	—	—
3/8	27.2	27.2	23.9	54.4	54.4	38.4	22.9	33.3	19.8	4.1	5.1
1/2	31.8	31.8	26.9	68.1	68.1	40.4	19.6	39.1	23.6	4.1	5.1
5/8	35.1	35.1	31.8	70.6	63.5	25.4	23.4	—	31.8	6.6	8.9

1. Dashes (—) in the table indicates dimensional data is unavailable for that fitting size and configuration.

TABLE 1B—DIMENSIONS OF UNION CONNECTORS⁽¹⁾ (FIGURE 1) - INCH DIMENSIONS

Tube Size	C1, hex maximum	C2, hex maximum	HD maximum	L maximum	L1 maximum	L2 maximum	L3 maximum	M maximum	OD maximum	T1 maximum	T2 maximum
1/4	1.07	1.07	0.65	2.13	1.89	1.14	0.75	1.02	0.61	0.12	0.16
5/16	—	—	—	1.76	—	—	—	1.00	0.68	—	—
3/8	1.07	1.07	0.94	2.14	2.14	1.51	0.90	1.31	0.78	0.16	0.20
1/2	1.25	1.25	1.06	2.68	2.68	1.59	0.77	1.54	0.93	0.16	0.20
5/8	1.38	1.38	1.25	2.78	2.50	1.00	0.92	—	1.25	0.26	0.35

1. Dashes (—) in the table indicate dimensional data is unavailable for that fitting size and configuration.




Figure 2a (AA0102)




Figure 2b (AA0103)

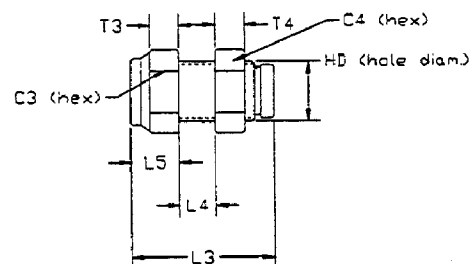


Figure 2c (AA0603)

FIGURE 2—STRAIGHT CONNECTORS

TABLE 2A—DIMENSIONS OF STRAIGHT CONNECTORS⁽¹⁾ (FIGURE 2) - METRIC DIMENSIONS

Tube Size	Pipe Thread	C1, hex maximum	C2, hex maximum	C3, hex maximum	C4, hex maximum	HD maximum	L1 maximum	L2 maximum
1/4	1/8	14.5	14.5	—	—	—	28.7	33.8
1/4	1/4	14.5	19.1	27.2	27.2	16.5	32.5	40.4
1/4	3/8	19.1	—	—	—	—	33.0	—
5/16	1/8	16.0	—	—	—	—	34.5	—
5/16	1/4	16.0	—	—	—	—	35.8	—
3/8	1/8	19.1	19.1	—	—	—	37.3	36.8
3/8	1/4	19.1	20.8	—	—	—	40.6	45.2
3/8	3/8	19.1	22.4	27.2	28.7	23.9	40.6	45.5
3/8	1/2	22.4	—	—	—	—	40.4	—
1/2	1/4	22.4	—	—	—	—	47.5	—
1/2	3/8	22.4	22.4	—	—	—	47.5	42.4
1/2	1/2	22.4	27.2	31.8	33.5	26.9	47.0	53.6
5/8	3/8	27.2	—	—	—	—	52.1	—
5/8	1/2	27.2	—	—	—	—	53.6	—
3/4	1/2	30.2	—	—	—	—	54.1	—

1. Dashes (—) in the table indicate dimensional data is unavailable for that fitting size and configuration.

TABLE 2A—DIMENSIONS OF STRAIGHT CONNECTORS — METRIC DIMENSIONS (CONTINUED)

Tube Size	Pipe Thread	L3 maximum	L4 maximum	L5 maximum	T1 minimum	T2 minimum	T3 minimum	T4 minimum
1/4	1/8	—	—	—	3.8	7.4	—	—
1/4	1/4	41.2	16.3	16.3	3.8	10.7	10.9	4.3
1/4	3/8	—	—	—	3.8	—	—	—
5/16	1/8	—	—	—	6.9	—	—	—
5/16	1/4	—	—	—	6.9	—	—	—
3/8	1/8	—	—	—	6.6	8.1	—	—
3/8	1/4	—	—	—	4.3	11.2	—	—
3/8	3/8	55.9	25.4	15.8	4.3	11.9	8.4	4.3
3/8	1/2	—	—	—	4.6	—	—	—
1/2	1/4	—	—	—	7.9	—	—	—
1/2	3/8	—	—	—	5.1	13.0	—	—
1/2	1/2	67.1	12.7	18.5	4.6	12.4	8.4	6.4
5/8	3/8	—	—	—	8.4	—	—	—
5/8	1/2	—	—	—	5.3	—	—	—
3/4	1/2	—	—	—	5.8	—	—	—

TABLE 2B—DIMENSIONS OF STRAIGHT CONNECTORS⁽¹⁾ (FIGURE 2) - INCH DIMENSIONS

Tube Size	Pipe Thread	C1, hex maximum	C2, hex maximum	C3, hex maximum	C4, hex maximum	HD maximum	L1 maximum	L2 maximum
1/4	1/8	0.57	0.57	—	—	—	1.13	1.33
1/4	1/4	0.57	0.75	1.07	1.07	0.65	1.28	1.59
1/4	3/8	0.75	—	—	—	—	1.30	—
5/16	1/8	0.63	—	—	—	—	1.36	—
5/16	1/4	0.63	—	—	—	—	1.41	—
3/8	1/8	0.75	0.75	—	—	—	1.47	1.45
3/8	1/4	0.75	0.82	—	—	—	1.60	1.78
3/8	3/8	0.75	0.88	1.07	1.13	0.94	1.60	1.79
3/8	1/2	0.88	—	—	—	—	1.59	—
1/2	1/4	0.88	—	—	—	—	1.87	—
1/2	3/8	0.88	0.88	—	—	—	1.87	1.67
1/2	1/2	0.88	1.07	1.25	1.32	1.06	1.85	2.11
5/8	3/8	1.07	—	—	—	—	2.05	—
5/8	1/2	1.07	—	—	—	—	2.11	—
3/4	1/2	1.19	—	—	—	—	2.13	—

1. Dashes (—) in the table indicate dimensional data is unavailable for that fitting size and configuration.

TABLE 2B—DIMENSIONS OF STRAIGHT CONNECTORS — INCH DIMENSIONS (CONTINUED)

Tube Size	Pipe Thread	L3 maximum	L4 maximum	L5 maximum	T1 minimum	T2 minimum	T3 minimum	T4 minimum
1/4	1/8	—	—	—	0.15	0.29	—	—
1/4	1/4	1.62	0.64	0.64	0.15	0.42	0.43	0.17
1/4	3/8	—	—	—	0.15	—	—	—
5/16	1/8	—	—	—	0.27	—	—	—
5/16	1/4	—	—	—	0.27	—	—	—
3/8	1/8	—	—	—	0.26	0.32	—	—
3/8	1/4	—	—	—	0.17	0.44	—	—
3/8	3/8	2.20	1.00	0.62	0.17	0.47	0.33	0.17
3/8	1/2	—	—	—	0.18	—	—	—
1/2	1/4	—	—	—	0.31	—	—	—
1/2	3/8	—	—	—	0.20	0.51	—	—
1/2	1/2	2.64	0.50	0.73	0.18	0.49	0.33	0.25
5/8	3/8	—	—	—	0.33	—	—	—
5/8	1/2	—	—	—	0.21	—	—	—
3/4	1/2	—	—	—	0.23	—	—	—




Figure 3a (AA0202)




Figure 3b (AA0203)




Figure 3c (AA0200)




Figure 3d (AA0302)




Figure 3e (AA0300)

FIGURE 3—ELBOW CONNECTORS

TABLE 3A—DIMENSIONS OF ELBOW CONNECTORS⁽¹⁾ (FIGURE 3) — METRIC DIMENSIONS

Tube Size	Pipe Thread	C, hex maximum	M1 maximum	M2 maximum	N1 maximum	N2 maximum	N3 maximum	N4 maximum	N5 maximum	T minimum	WF maximum
1/4	1/8	11.2	26.2	25.1	20.1	22.9	32.3	22.1	31.5	2.5	17.5
1/4	1/4	14.5	28.7	25.1	26.2	26.2	39.6	25.1	37.1	4.1	19.1
1/4	3/8	19.1	27.9	—	28.2	—	39.6	—	—	5.8	22.1
3/8	1/8	16.0	33.3	30.5	22.9	—	35.8	28.2	36.6	2.5	19.1
3/8	1/4	19.1	32.5	30.5	26.2	27.7	40.1	28.2	40.9	4.1	20.8
3/8	3/8	19.1	33.3	30.5	28.2	—	40.4	33.0	40.9	4.1	22.1
3/8	1/2	22.4	30.7	33.0	35.1	—	45.5	33.0	—	5.1	24.1
1/2	1/4	22.1	39.1	32.5	29.2	—	43.9	33.0	—	5.1	22.4
1/2	3/8	22.1	33.0	32.5	29.2	—	46.0	28.7	45.2	4.1	24.1
1/2	1/2	22.4	39.1	33.0	35.1	—	49.8	33.0	49.0	4.1	24.1
5/8	3/8	22.4	37.1	—	31.0	—	51.6	—	—	5.8	25.4
5/8	1/2	—	39.1	37.1	36.1	—	—	37.1	—	—	30.2
3/4	1/2	—	46.0	38.6	37.6	—	—	38.6	—	—	33.5

1. Dashes (—) in the table indicate dimensional data is unavailable for that fitting size and configuration.

TABLE 3B—DIMENSIONS OF ELBOW CONNECTORS⁽¹⁾ (FIGURE 3) — METRIC DIMENSIONS

Tube Size	Pipe Thread	C, hex maximum	M1 maximum	M2 maximum	N1 maximum	N2 maximum	N3 maximum	N4 maximum	N5 maximum	T minimum	WF maximum
1/4	1/8	0.44	1.03	0.99	0.79	0.90	1.27	0.87	1.24	0.10	0.69
1/4	1/4	0.57	1.13	0.99	1.03	1.03	1.56	0.99	1.46	0.16	0.75
1/4	3/8	0.75	1.10	—	1.11	—	1.56	—	—	0.23	0.87
3/8	1/8	0.63	1.31	1.20	0.90	—	1.41	1.11	1.44	0.10	0.75
3/8	1/4	0.75	1.28	1.20	1.03	1.09	1.58	1.11	1.1	0.16	0.82
3/8	3/8	0.75	1.31	1.20	1.11	—	1.59	1.30	1.61	0.16	0.87
3/8	1/2	0.88	1.21	1.30	1.38	—	1.79	1.30	—	0.20	0.95
1/2	1/4	0.87	1.54	1.28	1.15	—	1.73	1.30	—	0.20	0.88
1/2	3/8	0.87	1.30	1.28	1.15	—	1.81	1.30	1.93	0.16	0.95
1/2	1/2	0.88	1.54	1.30	1.38	—	1.96	1.30	1.93	0.16	0.95
5/8	3/8	0.88	1.46	—	1.22	—	2.03	—	—	0.23	1.00
5/8	1/2	—	1.54	1.46	1.42	—	—	1.46	—	—	1.19
3/4	1/2	—	1.81	1.52	1.48	—	—	1.52	—	—	1.32

1. Dashes (—) in the table indicate dimensional data is unavailable for that fitting size and configuration.

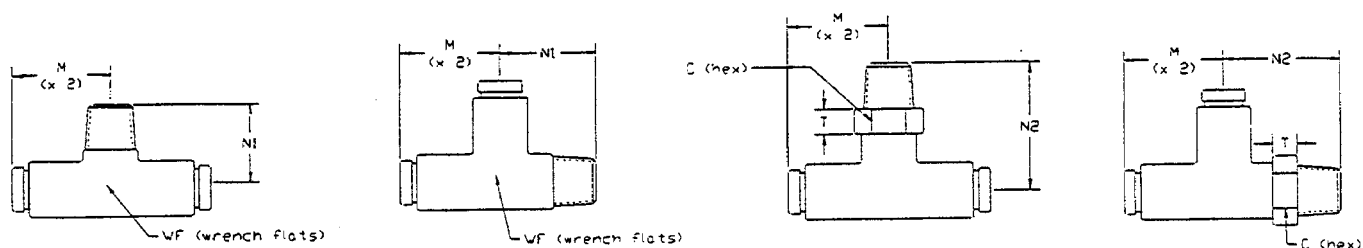


Figure 4a (AA0425)

Figure 4b (AA0424)

Figure 4c (AA 04FF)

Figure 4d (AA04EE)

FIGURE 4—TEE CONNECTORS

TABLE 4A—DIMENSIONS OF TEE CONNECTORS⁽¹⁾ (FIGURE 4) — METRIC DIMENSIONS

Tube Size	Pipe Thread	C, hex maximum	M maximum	N1 maximum	N2 maximum	T minimum	WF maximum
1/4	1/8	11.2	25.9	20.1	31.8	2.5	14.5
1/4	1/4	14.5	25.9	24.6	37.6	4.1	18.0
3/8	1/8	14.5	31.0	—	42.2	2.5	—
3/8	1/4	19.1	31.0	25.4	46.5	4.1	19.1
3/8	3/8	19.1	33.3	28.2	46.5	4.1	22.1
1/2	1/4	22.1	34.0	—	43.9	4.1	—
1/2	3/8	22.1	34.0	36.1	46.5	4.1	24.1
1/2	1/2	22.4	39.1	36.1	50.5	4.1	24.1

1. Dashes (—) in the table indicate dimensional data is unavailable for that fitting size and configuration.

TABLE 4B—DIMENSIONS OF TEE CONNECTORS⁽¹⁾ (FIGURE 4) — INCH DIMENSIONS

Tube Size	Pipe Thread	C, hex maximum	M maximum	N1 maximum	N2 maximum	T minimum	WF maximum
1/4	1/8	0.44	1.02	0.79	1.25	0.10	0.57
1/4	1/4	0.57	1.20	0.97	1.48	0.16	0.71
3/8	1/8	0.57	1.22	—	1.66	0.10	—
3/8	1/4	0.75	1.22	1.00	1.83	0.16	0.75
3/8	3/8	0.75	1.36	1.11	1.83	0.16	0.87
1/2	1/4	0.87	1.34	—	1.73	0.16	—
1/2	3/8	0.87	1.34	1.42	1.83	0.16	0.95
1/2	1/2	0.88	1.54	1.42	1.99	0.16	0.95

1. Dashes (—) in the table indicate dimensional data is unavailable for that fitting size and configuration.

3.5 Wall Thickness—Unless otherwise designated, the wall thickness at any point on a fitting which may be subjected to internal fluid pressure shall not be less than the thickness established by the specified dimensions, tolerances, and eccentricities for inner and outer surfaces.

3.6 Contour—Details of contour shall be optional with manufacturer, provided the tabulated dimensions are maintained and serviceability of the fittings is not impaired. Wrench flat geometry on elbows and tees shall be optional. Where extruded and forged shapes are reduced to conserve material, the wall thickness, unless otherwise specified, shall not be less than the minimum values in Table 5.

**TABLE 5—RECOMMENDED MINIMUM WALL THICKNESS
FOR EXTRUDED AND FORGED SHAPES**

Nominal Tube OD in	Wall Thickness Min mm	Wall Thickness Min in
1/4	1.0	0.04
5/16	1.3	0.05
3/8	1.3	0.05
1/2	1.5	0.06
5/8	2.0	0.08
3/4	2.0	0.08

3.7 Straight Threads—Unified straight threads shall be manufactured in accordance with ANSI B 1.1.

Unified standard Class 2A external and Class 2B internal threads shall apply to plain finish (un-plated) fittings of all types. For internally threaded parts with additive finish, the Class 2B diameters shall apply after plating.

Metric straight threads and British parallel pipe threads may be used and shall be manufactured in accordance with ISO 261 and ISO 228-1 respectively, however, this is not intended to preclude the use of other threads described in internationally accepted standards.

Where external threads are produced by roll threading and the body is not undercut, the unthreaded portion of body adjacent to the shoulder may be reduced to the minimum pitch diameter. (See Figure 5.)

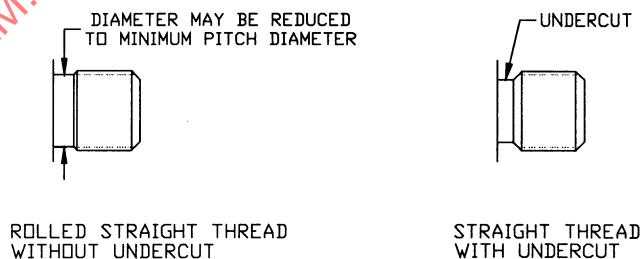


FIGURE 5—EXTERNAL ROLLED AND CUT STRAIGHT THREADS

External threads shall be suitably chamfered to allow for ease of assembly.

Internal threads shall be countersunk 90 degrees included angle to the diameters specified.