INTERNATIONAL STANDARD

ISO/IEC 20944-4

First edition 2013-01-15

Information technology — Metadata Registries Interoperability and Bindings (MDR-IB) —

Part 4:

Protocol bindings

Technologies de l'information — Interopérabilité et liaisons des registres de métadonnées (MDR-IB) —

Partie 4: Liaisons de protocoles

Cickto

Cickto

TANTARIOSISO

COM

CICKTO

TANTARIOSISO

TANTARIOS







COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Published in Switzerland

Contents

Page

Forew	vord	iv
Introd	duction	v
1	Scope	 1
2	Normative references	4
3	Terms and definitions	1
4	Intended use of this part of ISO/IEC 20944	1
5	Abstract model	2
5.1	General	2
5.2	Participant model	
5.3	Data model	2
5.4	Control Model	2
5.5	Connections	3
5.6	State model	3
6	Services	_
6.1	Use of ISO/IEC 13886	5
6.2	Session establishment services	5
6.3	Session parameter services	6
6.4	Session parameter servicesSecurity services	7
6.5	Data transfer services	8
6.6	Data sharing services	9
6.7	Miscellaneous	10
_	Bindings	40
7	Bindings	12
8	Administration	12
9	Conformance	40
9 9.1	Protocol conformance paradigm	12 12
9.2	Protocol server service	
9.3	Protocol client service	
9.4	Conformance labels	
10	Reserved for future standardization	13
11	HTTP/11 protocol binding	13
11.1	Session services	
11.2	Service list	
11.3	Conformance label prefix	
126	WebDAV protocol binding	14
12.1	Session services	
12.2	Service list	
123	Conformance label prefix	

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 20944-4 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 32, *Data management and interchange*.

ISO/IEC 20944 consists of the following parts, under the general title *Information technology* — *Metadata Registries Interoperability and Bindings (MDR-IB)*:

- Part 1: Framework, common vocabulary, and common provisions for conformance
- Part 2: Coding bindings
- Part 3: API bindings
- Part 4: Protocol bindings
- Part 5: Profiles

Introduction

The ISO/IEC 20944 series of International Standards provides the bindings and their interoperability for metadata registries, such as those specified in the ISO/IEC 11179 series of International Standards.

This part of ISO/IEC 20944 contains provisions that are common to protocol bindings (Clauses 4-10) and the protocol bindings themselves (Clause 11 onward). The protocol bindings have commonality in their conceptualization of the services provided. For example, common features include:

- common data transfer semantics;
- harmonized session services for connection-oriented and connection-less protocols.

Clause 11 and onward are the actual protocol bindings themselves. The clause of ISO/IEC 20944 are organized such that future amendments are possible, which would include additional protocol bindings.

STANDARDS SO. COM. CICK to view the full POF of SOILE 200 A.A. 2013

Information technology — Metadata Registries Interoperability and Bindings (MDR-IB) —

Part 4:

Protocol bindings

1 Scope

The ISO/IEC 20944 series of International Standards describe codings, application programming interfaces (APIs), and protocols for interacting with an ISO/IEC 11179 metadata registry (MDR).

This part of ISO/IEC 20944 specifies provisions that are common across protocol bindings for the ISO/IEC 20944 series of International Standards, and provides the individual protocol bindings themselves.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11404:2007, Information technology General-Purpose Datatypes (GPD)

ISO/IEC 13886:1996, Information technology — Language-Independent Procedure Calling (LIPC)

ISO/IEC 20944-1:2013, Information technology — Metadata Registries Interoperability and Bindings (MDR-IB) — Part 1: Framework common vocabulary, and common provisions for conformance

ISO/IEC 20944-2:2013, Information technology — Metadata Registries Interoperability and Bindings (MDR-IB) — Part 2: Coding bindings

IETF RFC 2616, Hypertext Transfer Protocol — HTTP/1.1, June 1999

IETF RFC 4918, HTTP Extensions for Web Distributed Authoring and Versioning (WebDAV), June 2007

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 20944-1 apply.

4 Intended use of this part of ISO/IEC 20944

The purpose of this part of ISO/IEC 20944 is to provide a common set of services (common protocol provisions) and standardized protocol bindings such that interoperable systems can be created to access the MDR repositories. These systems are interoperable in that they should be able to access MDR repositories that conform to this International Standard.

5 Abstract model

5.1 General

The protocol bindings have commonality in their conceptualization of data access services. For example, common features include:

- common data transfer semantics
- harmonized session services for connection-oriented and connection-less protocols

The conceptual model is divided into two parts: the data model and the control model. The data model describes the logical structure of information as it is transferred. The control model describes the structure of the transactions, events, and protocol state.

5.2 Participant model

The senders and receivers of messages are called participants. The protocol binding permits client-server, peer-to-peer, publish-subscribe, multicast, and broadcast modes of participation. The underlying communication system determines which modes of participation are supported.

5.3 Data model

The data structure of ISO/IEC 20944-2 is incorporated via normative reference.

5.4 Control Model

The control model refers to the methods of causing actions among the parties communicating. The following concepts characterize the control model.

5.4.1 Event

Assuming prior arrangement and appropriate authorization, each participant may send events. For the sender, an event is a one-way message with no expected response. In programming languages, an event is analogous to a "go to". For the receiver an incoming event is processed by an event handler. The semantics of event handling is outside the scope of this part of ISO/IEC 20944.

5.4.2 Wait

Assuming prior arrangement and appropriate authorization, a participant can ask another participant to wait for an event, e.g., node A asks node B to wait for event E. In operating system kernel technology, this is equivalent to "sleeping on an event".

5.4.3 Call

Assuming prior arrangement and appropriate authorization, a participant can send a "call" message, similar to a remote procedure call. A "call" is equivalent to (1) sending data (input parameters) from caller to callee, (2) sending a "start" event to the "callee", (3) posting a "wait" on the callee's "finish" event, (4) receiving data (output parameters) from callee to caller. The advantage of "call" over combined "event" and "wait" is that "call" handles the storage of temporary information in the "event" and "wait" services.

5.4.4 Parameters

The "event", "wait", and "call" messages may pass parameters. Parameters are passed in a list along with the target event.

A hypothetical function named Is is called with two function properties: (1) the options to the command, **EXAMPLE** and (2) three parameters to the command (the third parameter has properties, too). The following is illustration shows the syntax:

{ call ls .listing-type: long .dir-expand: no a b c .listing-encoding: iso-646 }

5.5 Connections

A connection is created when a client successfully completes a connection command to a server. A participant is one end of communication regardless of role (e.g., client or server). Some implementations may support multiple roles. Once a connection is established, parameters may be negotiated and sessions may be created for data and control transfer. A session is a connection established between one or more participants.

5.6 State model

A participant may act in the role of client or server.

5.6.1 Server state model

A server behaves according to the following state model.

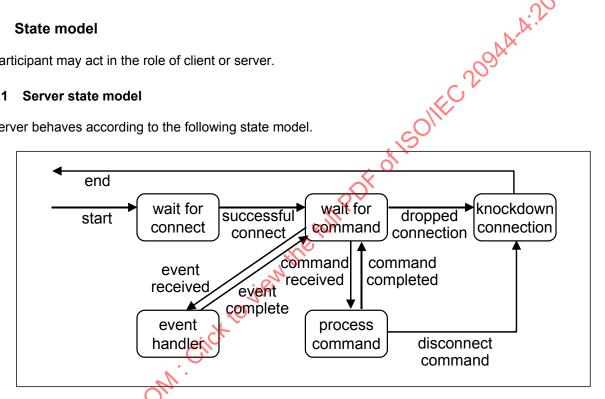


Figure 1 — State model for server

The following are the states for the server.

- Start: The state model begins in this state.
- Wait For Connect (state): The server is waiting for a connect.
- Successful Connect (event): Starts up the connection. Changes to Wait For Command (state).
- Wait For Command (state): The server is waiting for a command.
- Command Received (event): Begins the processing of a command. Changes to Process Command (state).
- Event Received (event): Begins the event handling. Changes to Event Handler (state).
- Dropped Connection (event): The connection was dropped. Changes to Knockdown Connection (state).
- Process Command (state): Processes a command, consumes and produces data, returns command status.

- Command Completed (event): The command has completed. Changes to Wait For Command (state).
- Disconnect Command (event): The Disconnect command was executed. Changes to Knockdown Connection (state).
- Event Handler (state): Processes an unsolicited event (e.g., security requests) and returns event status.
- Event Complete (event): The Event completed. Changes to Wait For Command (state).
- Knockdown Connection (state): Closes the connection. Changes to End (state)
- End: The state model exits.

5.6.2 Client state model

A client behaves according to the following state model.

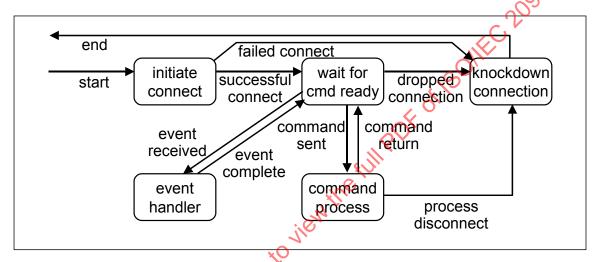


Figure 2 State model for client

The following are the states for the client.

- Start: The state model begins in this state.
- Initiate Connect (state) he client initiates a connection the server.
- Successful Connect (event): Starts up the connection. Changes to Wait For Cmd Ready (state).
- Failed Connect (event): Connection failure. Changes to Knockdown Connection (state).
- Wait For Cmd Ready (state): The client is waiting for the server to indicate that it is ready for a command.
- Command Sent (event): Sends the command to process. Changes to Command Process (state).
- Event Received (event): Begins the event handling. Changes to Event Handler (state).
- Dropped Connection (event): The connection was dropped. Changes to Knockdown Connection (state).
- Command Process (state): Requests the processing of a command, produces and consumes data, receives the command status upon command completion.
- Command Return (event): The command has completed. Changes to Wait For Cmd Ready (state).

- Process Disconnect (event): Sends the Disconnect command. Changes to Knockdown Connection (state).
- Event Handler (state): Processes an unsolicited event (e.g., security requests) and returns event status.
- Event Complete (event): The Event completed. Changes to Wait For Cmd Ready (state).
- Knockdown Connection (state): Closes the connection. Changes to End (state)
- End: The state model exits.

6 Services

6.1 Use of ISO/IEC 13886

The notation of ISO/IEC 13886 Language-Independent Procedure Calls is used to describe service interfaces.

NOTE The use of ISO/IEC 13886 notation is intended to provide a common description of services, but the protocol bindings themselves are not based upon APIs.

6.2 Session establishment services

The following messages start up and shut down sessions for protocols that use session-based access to metadata registries.

6.2.1 Connect

Synopsis

```
mdrib_connect:
procedure
(
   in target: string, // repository to connect to
   in options: string, // connect options
)
returns mdrib_handle
```

Description

Creates a new session to a data repository as named by target. The options parameter is an implementation-defined set of connection options. If successful, returns a session handle to the repository, but does not request access (see mdrib_open). If not successful, returns a null session handle.

6.2.2 Disconnect

Synopsis

```
mdrib_disconnect:
procedure
(
    in session: mdrib_handle // session handle
)
returns (state(success,failure)),
```

Description

Closes and disconnects a session to a data repository associated with the handle session and all of its child sessions. Returns success if successful, failure if unsuccessful.

6.2.3 Open

Synopsis

```
mdrib_open:
procedure
   in session: mdrib handle, // session handle
   in node: characterstring, // portion of repository to open
   in options: characterstring, // connect options
returns (mdrib handle),
```

Description

Opens a child session within a session to data repository, as pointed to by the handle session.

The node parameter is the name of a portion of the repository — a view. If node is the empty string (""), then the child session is a duplicate session of the parent session. The partitioning and naming of contents of repositories is outside the scope of this Standard.

If mdrib_open is successful, it returns a handle to the child session. If not successful, it returns a null handle.

6.2.4 Close

Synopsis

```
the full PDF
mdrib_close:
procedure
(
    in mdrib_handle: session, // session handle
)
returns (state(success, failure)),
```

Description

Closes a session associated with the handle session and all of its child sessions. Returns success if successful, failure if unsuccessful.

6.3 Session parameter services

The following services may be used to modify and retrieve the parameters of the session.

6.3.1 Get path

Synopsis

```
mdrib get path:
procedure
(
    in session: mdrib handle, // session handle
returns (characterstring),
```

Description

Retrieves the current default node path.

If mdrib get path is successful, it returns a string containing the default node path; otherwise, error return is indicated by a return of a null pointer (not an empty string).

6.3.2 Put path

Synopsis

```
mdrib_put_path:
procedure
(
    in session: mdrib_handle, // session handle
    in node: characterstring, // portion of repository
)
returns (state(success, failure)),
```

Description

Changes the current default node path to the path specified by node. If node is a relative path, then the new path is relative to the previous default node path.

If mdrib_put_path is successful, it returns success, otherwise error return is indicated by a return of failure.

6.4 Security services

The following services are supported.

6.4.1 Request Authorization/Authentication

Synopsis

```
mdrib_request_auth:
procedure
(
    in session: mdrib_handle, // session handle
    in auth_type: characterstring, // auth type
    in auth_options: characterstring, // auth options
)
returns (state(success,failure)),
```

Description

Requests the repository to supply authorization and/or authentication credentials, as pointed to by the handle session.

The auth_type parameter is an implementation-defined set of credentials that are requested from the repository.

The authorization parameter is an implementation-defined set of authorization and/or authentication options.

If mdrib_request_auth is successful, it returns success, otherwise error return is indicated by a return of failure.

6.4.2 Response Authorization/Authentication

Synopsis

```
mdrib_response_auth:
procedure
(
    in session: mdrib_handle, // session handle
    in auth_type: string, // auth type
    auth_handler(): procedure, // auth handler function
)
returns state(success,failure),
```

Description

Registers a handler for authorization and/or authentication responses, as requested by the repository pointed to by the handle session.

The auth type parameter is an implementation-defined set of credentials that are requested from the repository.

The auth_handler parameter a pointer to a handler service. The handler service is called for each authorization and/or authentication request that matches the type auth type. The auth handler service is called with at least three parameters: the session handle, the actual auth type, the auth option, and zero or more parameters.

If mdrib_response_auth is successful, it returns success, otherwise error return is indicated by a return of failure.

6.5 Data transfer services

The following data transfer are supported.

6.5.1 Get value

Synopsis

```
a by a by of Isolific 2094A.
mdrib get value:
procedure
   in session: mdrib handle, // session handle
   in src_identifier: characterstring, // src_object name
   in dst label type: characterstring, // saved label: typeof
   out dst label ptr: pointer, // saved label: ptr to
   in dst type type: characterstring, / saved type: typeof
   out dst type ptr: pointer, // saved type: ptr to
   in dst object type: characterstring, // saved value: typeof
   out dst object ptr: pointer, // saved value: ptr to
   in dst proplist type: characterstring, // saved proplist: typeof
   out dst proplist ptr: pointer, // saved proplist: ptr to
returns (state(success, failure)),
```

Description

Gets a value converted to a particular datatype, as identified by src_identifier.

6.5.2 Put value

Synopsis

```
integer mdrib_put_value
(
   in session: mdrib handle, // session handle
   in src_identifier: characterstring, // src object name
   in src label type: characterstring, // assigned label: typeof
   in object src_label_ptr, // assigned label: ptr to
   in src_type_type: characterstring, // assigned type: typeof
   in object src_type_ptr, // assigned type: ptr to
   in src_object_type: characterstring, // assigned value: typeof
   in object src_object_ptr, // assigned value: ptr to
   in src proplist type: characterstring, // assigned proplist: typeof
   in object src proplist ptr, // assigned proplist: ptr to
)
```

Description

Puts a value in an object named src identifier. The label is specified by the parameter type src label type and by a pointer to the parameter value src_label_ptr. The object type is specified by the parameter type src_type_type and by a pointer to the parameter value src_type_ptr. The object value is specified by the parameter type src_object_type and by a pointer to the parameter value src_object_ptr. The property list is specified by the parameter type src proplist type and by a pointer to the parameter value src proplist ptr. The parameter value may by MDRIB PARAMETER STRING that specifies the next parameter is a string type.

6.6 Data sharing services

The following data sharing services are supported.

6.6.1 Lock resource

Synopsis

```
31501EC 2094A-A:2013
mdrib_lock_resource:
procedure
    in session: mdrib handle, // session handle
    in identifier: characterstring, // object name in qualifier: characterstring, // lock service qualifier
                             Click to view the full r
returns (state(success, failure)),
```

Description

Locks a resource pointed to by identifier.

6.6.2 Unlock resource

Synopsis

```
mdrib_unlock_resource;
procedure
   in session: mdrib handle, // session handle
   in identifier: characterstring, // object name
   in qualifier: characterstring, // unlock service qualifier
returns (state(success, failure)),
```

Description

Unlocks a resource pointed to by identifier.

6.7 **Miscellaneous**

6.7.1 Make Object message

Synopsis

```
mdrib make object:
          procedure
                   in session: mdrib handle, // session handle
                  ...ptr to
...ptr to
...ptr to
...ptr to
...ptr to
...pect_type: typeof
...pect_type: characterstring, // assigned value: typeof
in src_object_ptr: pointer, // assigned value: ptr to
in src_proplist_type: characterstring, // assigned proplist: typeof
in src_proplist_ptr: pointer, // assigned proplist: ptr to
irns (state(success,failure)),
ion
                   in src identifier: characterstring, // src object name
Creates a new object. The parameters are the same as the mdrib_put_object.

If mdrib_make_object is successful, it returns success, otherward.

6.7.2 Delete Object made and the made and the made are the same as the mdrib_put_object.
```

If mdrib make object is successful, it returns success, otherwise error return is indicated by a return of failure.

Synopsis

```
to rienthe
mdrib remove object:
procedure
   in session: mdrib handle, // session handle
   in src_identifier: characterstring, // src object name
   in qualifier: characterstring, // delete service qualifier
returns (state(success,failure)),
```

Description

Removes an object. The sro identifier identifies the object to delete.

If mdrib_remove_object is successful, it returns success, otherwise error return is indicated by a return of failure.

6.7.3 Link Object message

Synopsis

```
mdrib link object:
procedure
   session: mdrib handle, // session handle
   in src_identifier: characterstring, // src object name
   in dst_identifier: characterstring, // dst object name
   in qualifier: characterstring, // link type: soft, hard
returns (state(success, failure)),
```

Description

Links an existing object to a new name. The src_identifier is the name of the existing object. The dst_identifier is the name of the new object. The link_type is an implementation-defined link type.

If mdrib_link_object is successful, it returns success, otherwise error return is indicated by a return of failure.

6.7.4 Property Find message

Synopsis

```
in session: mdrib_handle, // session handle
in src_identifier: characterstring, // src object name (wildcard)
in qualifier: characterstring, // propfind service qualifier
irns (characterstring),
mdrib propfind
(
                                                                                             of Sollke 2091
returns (characterstring),
```

Description

Lists all objects that match src_identifier.

If mdrib_list_object is successful, it returns a string; otherwise, error return is indicated by the NULL pointer.

6.7.5 Copy resource

Synopsis

```
integer mdrib copy resource
   in session: mdrib handle, // Session handle
   in src_identifier: characterstring, // src object name
   in dst identifier: characterstring, // dst object name
   in qualifier: characterstring, // copy service qualifier
```

Description

Copies a resource from src_identifier to _dst_identifier.

6.7.6 Move resource

Synopsis

```
integer mdrib move resource
    in session: mdrib handle, // session handle
    in src_identifier: characterstring, // src object name
    in dst_identifier: characterstring, // dst object name
    in qualifier: characterstring, // move service qualifier
)
```

Description

Renames a resource from src_identifier to _dst_identifier.

7 Bindings

This part of ISO/IEC 20944 describes the common conceptual model and common data services across all protocol bindings. A conforming protocol binding shall conform to the requirements described in Clauses 4, 5, 6, 8, and 9.

8 Administration

There are no administrative requirements.

9 Conformance

9.1 Protocol conformance paradigm

The conformance paradigm for ISO/IEC 20944 consists of the following conformance roles: protocol client, protocol server, protocol peer.

Definitions: support, use, test, access, probe

The following terms are defined in the context of protocol conformance for data interchange participants:

- A "supported" feature is one that is implemented by the client, server, or peer service and may be used by any client, server, or peer service within the appropriate role among the data interchange participants, e.g., client-server, peer-to-peer.
- A feature is "used" if it is transmitted, received, or controlled by a client, server, or peer service.
- A feature is "tested" if client, server, or peer service inquires about or negotiates for the existence of that
 feature with other data interchange participants.
- A feature is "accessed" if it is transmitted or received by a client, server, or peer service.
- A feature is "probed" if a client, server, or peer service implicitly tests the existence of that feature by attempting to use the feature (see "use" above) with other data interchange participants that permit error recovery.

NOTE Protocol conformance makes requirements upon all data interchange participants: the client service, the service, and the peer service.

9.2 Protocol server service

An strictly conforming protocol server shall implement all the features of the protocol according to the requirements of the protocol binding. A strictly conforming protocol server shall not implement extensions to the protocol binding.

An conforming protocol server shall implement all the features of the protocol according to the requirements of the protocol binding. A conforming protocol server may implement extensions to the protocol binding. A conforming protocol server may provide services to test, access, and/or probe for additional capabilities.

9.3 Protocol client service

An strictly conforming protocol client shall use the features of the protocol according to the requirements of the protocol binding. A strictly conforming protocol client shall not perform implementation-defined behavior.

An conforming protocol client shall use the features of the protocol according to the requirements of the protocol binding.

9.4 Conformance labels

The following labels indicate certain kinds of conformity to this part of ISO/IEC 20944:

- Pattern 1: "ISO/IEC 20944-4/B/prefix" where "prefix" represents the kind of binding, as defined in Clauses 11 and onward. For example, "ISO/IEC 20944-4/B/HTTP" corresponds to the HTTP/1.1 binding.
- Pattern 2: ISO/IEC 20944-4/B/prefix/role" where "prefix" represents the kind of binding, as defined in Clauses 11 and onward, and "role" is one of "C", "S", or "P" corresponding to protocol client, protocol server, and protocol peer, as defined in this Clause. For example, "ISO/IEC 20944-4/B/WEBDAV/C" corresponds to a protocol client using the WebDAV protocol binding.

The location of the placement of conformance labels is outside the scope of this International Standard.

10 Reserved for future standardization

This Clause is reserved for future standardization.

11 HTTP/1.1 protocol binding

The HTTP/1.1 protocol binding is described in this Clause, based upon IETF RFC 2068 HTTP/1.1.

11.1 Session services

Within the context of MDR interoperability bindings, the TTP/1.1 protocol binding is session-less¹.

11.2 Service list

The HTTP/1.1 protocol binding uses the following services to affect data transfer:

11.2.1 Get data service

Data is transferred from server to client via the HTTP GET service.

The URI specified in the HTTP GET service corresponds to the path to the data itself.

EXAMPLE The following URL²

http://repository.org/VD;id=1234/value_domain_class/value_domain_unit_of_measure/unit_of_measure precision

corresponds to the Unit of Measure Precision attribute for the Value Domain with item identifier "1234".

11.2.2 Put data service

This protocol binding does not provide a Put Data service.

_

¹ The HTTP/1.1 protocol is session-based at Layer 5 of the protocol, but is session-less at Layer 7, which is what is described in this Part of ISO/IEC 20944.

² The syntax for repositories' URI is implementation-defined. The syntax in the illustration is hypothetical.