

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS81714/23

FEDERAL SUPPLY CLASS
5940

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-T-81714/23B AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-T-81714/23B. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of AS81714/23

THIRD ANGLE PROJECTION



PREPARED BY SAE SUBCOMMITTEE AE-8C2

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

TERMINAL JUNCTION SYSTEM, TERMINAL
JUNCTION BLOCKS, ELECTRONIC, IN-LINE
JUNCTIONS, INTEGRAL FUSE, SERIES I

AS81714/23
SHEET 1 OF 5

ISSUED 2001-07 REAFFIRMED 2006-10

Copyright 2006 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)
Fax: 724-776-0790

Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

THE COMPLETE REQUIREMENTS FOR ACQUIRING THE IN-LINE JUNCTIONS DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF SPECIFICATION MIL-T-81714.

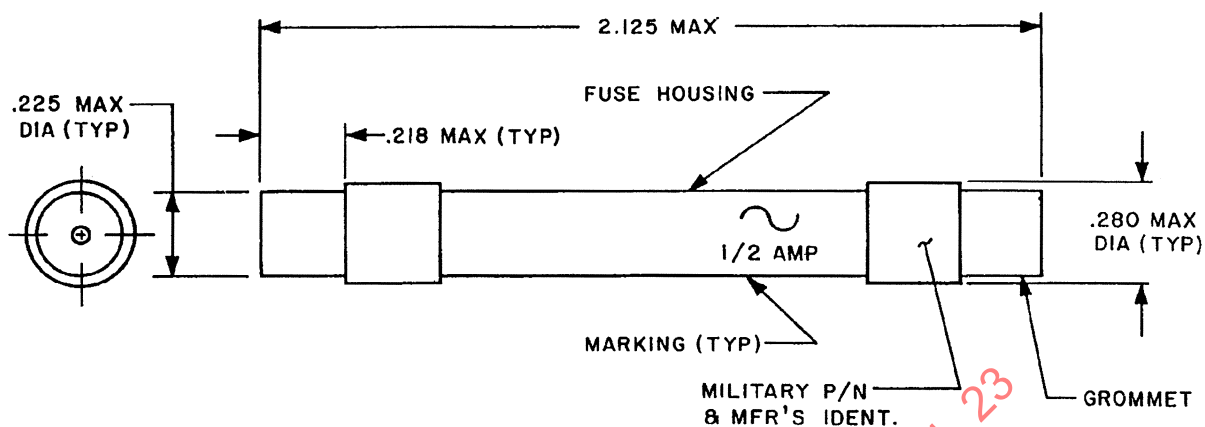


FIGURE 1. STYLE 1 IN-LINE JUNCTION FUSE (REF TABLE I).

TABLE I. STYLE 1 PART NUMBERS. 1/

Part Number <u>2/</u> <u>3/</u>	Fuse Rating		Contact (See Reqt 4)	
	Amps	Volts	Size	Part Number
M81714/23-1*001	1/16	125	20	M39029/1-101
M81714/23-1*002	1/8	125	20	M39029/1-101
M81714/23-1*003	1/4	125	20	M39029/1-101
M81714/23-1*004	3/8	125	20	M39019/1-101
M81714/23-1*005	1/2	125	20	M39029/1-101
M81714/23-1*006	3/4	125	20	M39029/1-101
M81714/23-1*007	1	125	20	M39029/1-101
M81714/23-1*008	1-1/2	125	20	M39029/1-101
M81714/23-1*009	2	125	20	M39029/1-101
M81714/23-1*010	2-1/2	125	20	M39029/1-101
M81714/23-1*011	3	125	20	M39029/1-101
M81714/23-1*012	3-1/2	125	20	M39029/1-101
M81714/23-1*013	4	125	20	M39029/1-101
M81714/23-1*014	5	125	20	M39029/1-101
M81714/23-1*015	7	125	20	M39029/1-101
M81714/23-1*016	10	125	20	M39029/1-101

1/ Style 1 shall meet the requirements of MIL-F-23419, Type FM04.2/ See part number explanation, Note 6.3/ See Note 7.

Inch	mm	Inch	mm
.218	5.54	.401	10.19
.225	5.72	2.125	53.98
.280	7.11	3.100	78.74

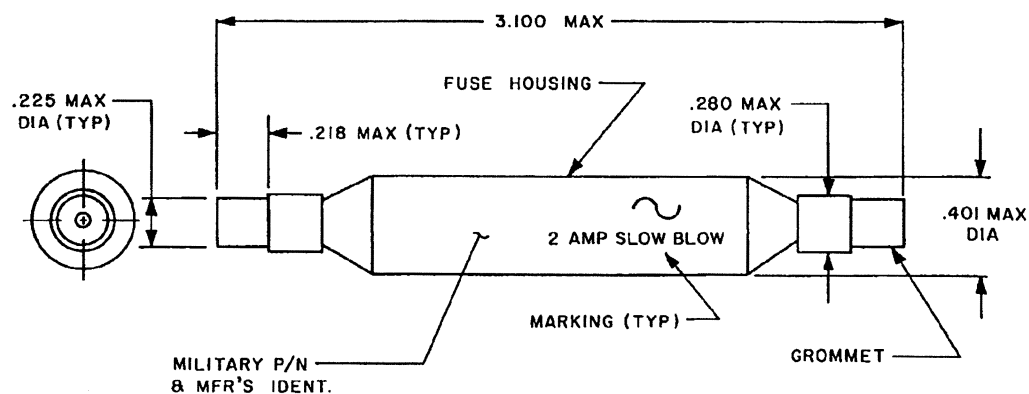
FIGURE 2. STYLE 2 IN-LINE JUNCTION FUSE (REF TABLE II). 1/

TABLE II. STYLE 2 PART NUMBERS.

Part Number <u>2/</u> <u>4/</u>	Fuse Rating <u>2/</u>		Contact	
	Amps	Volts	Size	Part Number
M81714/23-2*001	1/16	125	20	M39029/1-101
M81714/23-2*002	1/8	125	20	M39029/1-101
M81714/23-2*003	1/4	125	20	M39029/1-101
M81714/23-2*004	3/8	125	20	M39019/1-101
M81714/23-2*005	1/2	125	20	M39029/1-101
M81714/23-2*006	3/4	125	20	M39029/1-101
M81714/23-2*007	1	125	20	M39029/1-101
M81714/23-2*008	1-1/2	125	20	M39029/1-101
M81714/23-2*009	2	125	20	M39029/1-101
M81714/23-2*010	2-1/2	125	20	M39029/1-101
M81714/23-2*011	3	125	20	M39029/1-101
M81714/23-2*013	4	125	20	M39029/1-101
M81714/23-2*014	5	125	20	M39029/1-101
M81714/23-2*015	7	125	20	M39029/1-101
M81714/23-2*016	10	125	20	M39029/1-101

1/ Style 2 shall meet the requirements of MIL-F-15160, Type F03B.2/ See part number explanation, Note 6.3/ Slow blow fuse.4/ See Note 8.